



**21FP4-A — 21FP4-C**  
**CATHODE-RAY TUBE**

**21-INCH RECTANGULAR, GLASS**  
**FOCUS—ELECTROSTATIC**  
**DEFLECTION—MAGNETIC**  
**70-DEGREE DEFLECTION ANGLE**  
**21FP4-C—ALUMINIZED SCREEN**

**19 1/8- BY 13 7/8-INCH PICTURE SIZE**  
**FACEPLATE—CYLINDRICAL, GRAY**  
**ION-TRAP GUN**  
**EXTERNAL CONDUCTIVE COATING**

**DESCRIPTION AND RATING**

The 21FP4-A is an electrostatic-focus and magnetic-deflection, direct-view all-glass picture tube which provides a 19 1/8- by 13 7/8-inch picture for television applications. The electron gun has a focusing voltage range of -0.4 to +2.2 percent of the anode voltage and is used with an external single-field ion-trap magnet. Other features of this tube include a high-quality gray faceplate which increases picture contrast and detail under high-ambient-light conditions, a space-saving rectangular face shape, and a cylindrical front surface which materially reduces the effects of specular reflection. An external conductive coating serves as a filter capacitor when grounded.

The 21FP4-C has the additional feature of a reflective aluminized screen which increases light output.

**GENERAL**

**ELECTRICAL**

Heater Voltage .....	6.3	Volts
Heater Current .....	0.6 ± 10%	Amperes
Focusing Method—Electrostatic		
Deflecting Method—Magnetic		
Deflection Angle, approximate		
Diagonal .....	70	Degrees
Horizontal .....	65	Degrees
Vertical .....	50	Degrees
Direct Interelectrode Capacitances, approximate		
Cathode to All Other Electrodes .....	5	μμf
Grid-No. 1 to All Other Electrodes .....	6	μμf
External Conductive Coating to Anode		
Maximum .....	750	μμf
Minimum .....	500	μμf

**OPTICAL**

Phosphor Number—P4, Sulfide Type	
Fluorescent Color—White	
Phosphorescent Color—White	
Persistence—Short	
Faceplate—Gray	
Light Transmission at Center, approximate .....	71 Percent



**MECHANICAL**

Over-all Length . . . . .	23 $\frac{1}{32}$ ± 3/8	Inches
Greatest Bulb Dimensions		
Diagonal . . . . .	21 $\frac{7}{32}$ ± 1/8	Inches
Width . . . . .	20 $\frac{1}{4}$ ± 1/8	Inches
Height . . . . .	15 $\frac{9}{16}$ ± 1/8	Inches
Minimum Useful Screen Dimensions		
Diagonal . . . . .	20 $\frac{1}{8}$	Inches
Width . . . . .	19 $\frac{1}{8}$	Inches
Height . . . . .	13 $\frac{7}{8}$	Inches
Neck Length . . . . .	7 $\frac{1}{2}$	Inches
Bulb Number, ASA Designation—J170A or J170C		
Bulb Contact—Recessed Small-cavity Cap, JETEC No. J1-21		
Base—Small-shell Duodecal 6-Pin, JETEC No. B6-63		
Basing, JETEC Designation—12L		
Bulb Contact Alignment		
Anode Contact Aligns with Pin No. 6 ±30 Degrees		
Mounting Position—Any		
Net Weight, approximate . . . . .	27	Pounds

**MAXIMUM RATINGS<sup>Δ</sup>****DESIGN-CENTER VALUES\***

Anode Voltage† . . . . .	18,000 Max	Volts DC
Focusing-Electrode Voltage . . . . .	−500 to +1000 Max	Volts DC
Grid-No. 2 Voltage . . . . .	500 Max	Volts DC
Grid-No. 1 Voltage		
Negative-Bias Value . . . . .	125 Max	Volts DC
Positive-Bias Value . . . . .	0 Max	Volts DC
Positive-Peak Value . . . . .	2 Max	Volts
Peak Heater-Cathode Voltage		
Heater Negative with Respect to Cathode		
During Warm-up Period not to Exceed 15 Seconds . . . . .	410 Max	Volts
After Equipment Warm-up Period . . . . .	180 Max	Volts
Heater Positive with Respect to Cathode . . . . .	180 Max	Volts

**TYPICAL OPERATING CONDITIONS<sup>Δ</sup>**

Anode Voltage $\pi$ . . . . .	16,000	Volts DC
Focusing-Electrode Voltage for Focus . . . . .	−64 to +352	Volts DC
Focusing-Electrode Current . . . . .	−15 to +25	Microamperes DC
Grid-No. 2 Voltage . . . . .	300	Volts DC
Grid-No. 1 Voltage $\phi$ . . . . .	−28 to −72	Volts DC
Ion-Trap Field Intensity $\phi$ , approximate . . . . .	40	Gausses

**CIRCUIT VALUES**

Grid-No. 1 Circuit Resistance . . . . .	1.5 Max	Megohms
Grid-No. 2 Circuit Resistance . . . . .	0.1 Min	Megohms
Focusing-Electrode Circuit Resistance . . . . .	0.1 Min	Megohms

Protective resistance in the grid-No. 2 and focusing-electrode circuits is advisable to prevent damage to the tube. If applicable, one resistor common to both circuits may be used.

△ All voltages are measured with respect to cathode.

\*The maximum ratings provide a ten-percent safety factor in accordance with the standard design-center system of rating cathode-ray tubes. The tube will withstand the combined effects of variations in line voltages and components provided the maximum design-center values are not exceeded by more than ten percent.


†Anode, grid-No. 3, and grid-No. 5, which are connected together within the tube are referred to herein as anode.

If this tube is operated at voltages in excess of 16,000 volts, x-ray radiation shielding may be necessary to avert possible danger of personal injury from prolonged exposure at close range. The protective face-viewing window of apparatus using tubes of this type may provide such a safeguard. If the radiation measured in contact with this window does not exceed 6.25 milliroentgens per hour, the window will normally provide adequate protection.

π Brightness and focus quality decrease with decreasing anode voltage. In general, the anode voltage should not be less than 14,000 volts.

♦ For visual extinction of focused raster.

φ Single-field ion-trap magnet adjusted to optimum position, equivalent to 40 milliamperes through RETMA ion-trap magnet No. 117.

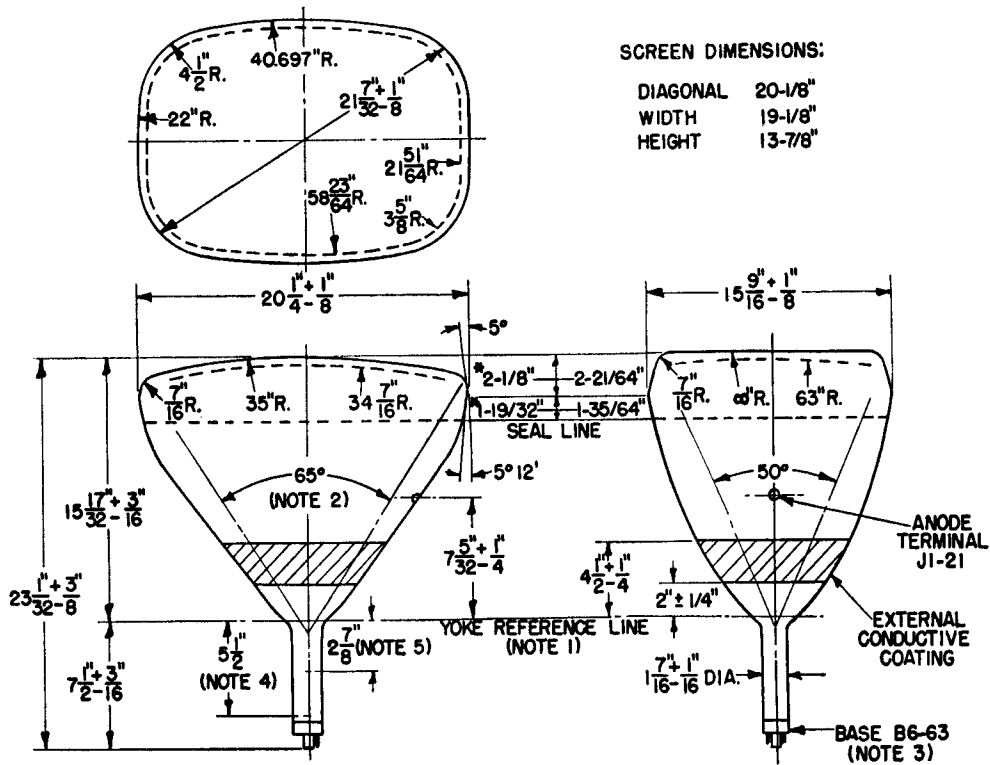

**NOTES:**

1. REFERENCE LINE IS DETERMINED BY THE PLANE OF THE UPPER EDGE OF THE REFERENCE LINE GAGE (RETMA NO. 110) WHEN THE GAGE IS RESTING ON THE CONE.
  2. DEFLECTION ANGLE ON DIAGONAL IS 70 DEGREES.
  3. ANODE TERMINAL ALIGNS WITH PIN-NO. 6 ± 30 DEGREES.
  4. APPROXIMATE POSITION OF ION-TRAP MAGNET.
  5. APPROXIMATE POSITION OF CENTERING MAGNET, IF USED.
- \* THIS SET OF VALUES ALSO POSSIBLE.

