


PHILIPS „MINIWATT“

Heizspannung		ca.
Tension de chauffage	V_f	= env. 20 V
Filament voltage		appr.
Heizstrom		
Courant de chauffage	I_f	= 0,180 A
Filament current		
Anodenspannung		
Tension anodique	$V_{a \max}$	= 200 V
Anode voltage		
Normaler Anodenstrom		
Courant anodique normal	I_a	= 6 mA
Normal anode current		
Neg. Gittervorspannung		ca.
Polarisation négative de grille	V_g	= env. 3 V
Negative grid bias		appr.
Verstärkungsfaktor		
Coefficient d'amplification	$g(k)$	= 30
Amplification factor		
Steilheit (max.)		
Inclinaison (max.)	S_{\max}	= 2,0 mA/V
Slope (max.)		
Steilheit (norm.)		
Inclinaison (norm.)	S_{norm}	= 1,8 mA/V
Slope (norm.)		
Innerer Widerstand (norm.)		
Résistance intérieure (norm.)	R_i	= 16000 Ohm
Internal resistance (norm.)		
Max. Länge		
Longueur max.	l	= 108 mm
Overall length		
Grösster Durchmesser		
Diamètre max.	d	= 46 mm
Max. diameter		
Socket		
Culot		= 0 35
Base		
Sockelschaltung		
Connexion du culot		= S XIV
Base connection		
Anwendung: Gleichrichtung		
Application: Détection		
Function: Detection		

**PHILIPS
MINIWATT
B2044S**

$V_f = 20V$
 $V_{max} = 200V$
 $I_a = 6mA$
 $S_{max} = 2mA/V$
 $S_{norm} = 1,8mA/V$
 $g(k) = 30$

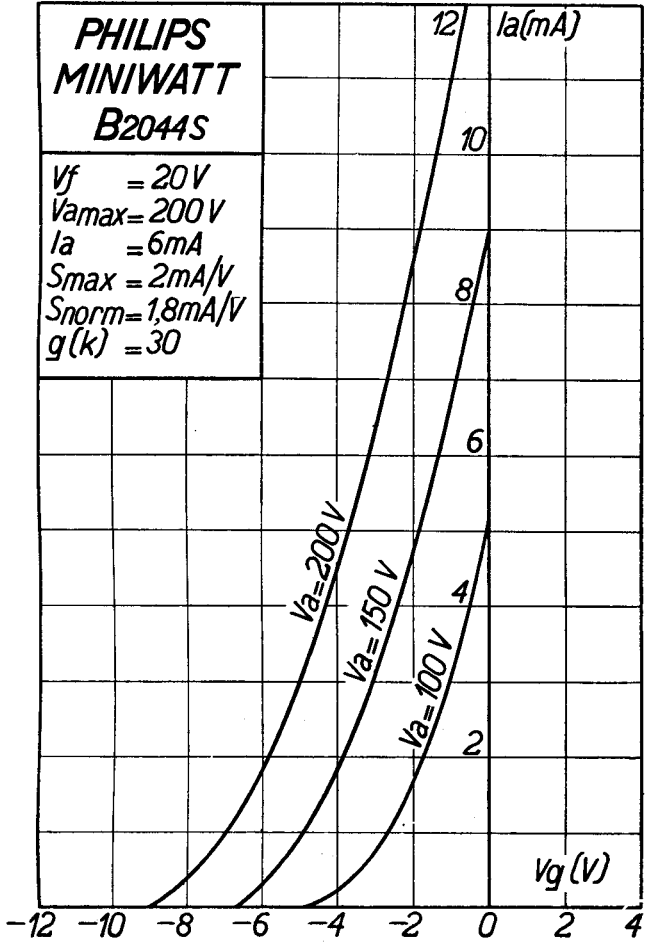

PHILIPS „MINIWATT“

Max. Anodenspannung	V^{ao}	= 250 V
Tension anodique max.	V^{aR}	= 250 V
Max. anode voltage	V^{aL}	= 200 V
Max. Anodenbelastung	W_a	= 1,5 W
Dissipation anodique max.		
Max. anode dissipation		
Max. Kathodenstrom	I_c	= 15 mA
Courant cathodique max.		
Max. cathode current		
Gitterstrom-Einsatzpunkt	V_{gi}	= -1,3 V
Point de commenc. du courant de grille		
Starting point of grid current		
Max. Widerstand im Gitterkreis	R_{g1}	= 2 M. Ohm
Résistance max. dans le circuit de grille	R_{g2}	= 1 M. Ohm
Max. resistance in grid circuit		
Max. Spann. zwischen Faden und Kath.	V_{fc}	= 100 V
Tension max. entre filament et cathode		
Max. voltage between filam. and cathode		
Max. Widerst. zwischen Faden und Kath.	R_{fc}	= 20000 Ohm
Résist. max. entre filament et cathode		
Max. resist. betw. filament and cathode		

**PHILIPS
MINIWATT
B2044S**

