


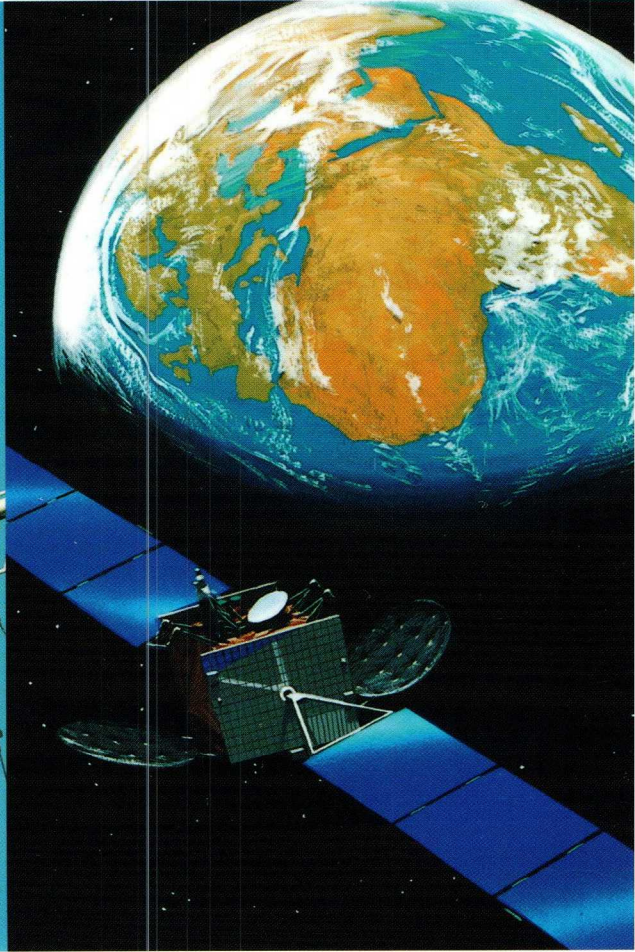

1997

Data Handbook SC15

QUALITY ASSURED

Our quality system focuses on the continuing high quality of our components and the best possible service for our customers. We have a three-sided quality strategy: we apply a system of total quality control and assurance; we operate customer-oriented dynamic improvement programmes; and we promote a partnering relationship with our customers and suppliers.

PRODUCT SAFETY

In striving for state-of-the-art perfection, we continuously improve components and processes with respect to environmental demands. Our components offer no hazard to the environment in normal use when operated or stored within the limits specified in the data sheet.

Some components unavoidably contain substances that, if exposed by accident or misuse, are potentially hazardous to health. Users of these components are informed of the danger by warning notices in the data sheets supporting the components. Where necessary the warning notices also indicate safety precautions to be taken and disposal instructions to be followed. Obviously users of these components, in general the set-making industry, assume responsibility towards the consumer with respect to safety matters and environmental demands.

All used or obsolete components should be disposed of according to the regulations applying at the disposal location. Depending on the location, electronic components are considered to be 'chemical', 'special' or sometimes 'industrial' waste. Disposal as domestic waste is usually not permitted.

Microwave Transistors

CONTENTS

	Page
INDEX	3
SELECTION GUIDE	7
MARKING CODES	11
GENERAL	15
DEVICE DATA (in alphanumeric sequence)	29
PACKAGE OUTLINES	347
DATA HANDBOOK SYSTEM	365

DEFINITIONS

Data sheet status	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
Limiting values	
Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
Application information	
Where application information is given, it is advisory and does not form part of the specification.	

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.

INDEX



Microwave Transistors

Index

ALPHANUMERIC INDEX

Types added to the range since the last issue of Handbook SC15 (1995 issue) are shown in bold print.

TYPE	PAGE
BLS2731-10	30
BLS2731-20	33
BLS2731-50	36
BLS2731-110	39
BLS2731-150	42
LBE2003S	51
LBE2009S	51
LFE15600X	64
LLE15180xX	71
LLE15370X	78
LLE16045X	85
LLE16120X	92
LLE16350X	98
LTE21009R	105
LTE21015R	108
LTE21025R	113
LTE42005S	117
LTE42008R	123
LTE42012R	130
LV1721E50R	136
LV2024E45R	140
LVE21050R	146
LWE2010S	149
LWE2015R	155
LX1214E500X	160
LXE15450X	167
LXE16350X	174
LZ1418E100R	184
MF1011B900Y	189
MTB10010U	196
MX0912B100Y	201
MX0912B251Y	208
MX0912B351Y	215
MX1011B200Y	222
MX1011B700Y	230
MZ0912B50Y	236
MZ0912B100Y	201
PLB16004U	242

TYPE	PAGE
PLB16012U	247
PLB16030U	252
PPC5001T	257
PQC5001T	257
PTB23001X	261
PTB23002U	267
PTB23003X	261
PTB23005X	261
PTB23006U	272
PTB32001X	278
PTB32003X	278
PTB32005X	278
PTC4001T	284
PVB42004X	287
PXB16050U	291
PZ1418B15U	297
PZ1418B30U	302
PZ1721B25U	302
PZ2024B20U	302
PZB16035U	311
RX1214B80W	316
RX1214B130Y	316
RX1214B170W	322
RX1214B300Y	327
RX1214B350Y	332
RZ1214B35Y	338
RZ1214B65Y	342

MAINTENANCE TYPES

TYPE	PAGE
LAE4001R	44
LAE4002S	48
LCE2009S	51
LEE1015T	61
LV2327E40R	144
LXE18300X	181
MX1011B430W	228

SELECTION GUIDE

	Page
Pulsed power transistors for radar	8
Pulsed power transistors for avionics	8
Linear power transistors	9
CW power transistors	10
Oscillator power transistors	10

Microwave transistors

Selection guide

PULSED POWER TRANSISTORS FOR RADAR

L-band

TYPE NUMBER	f (GHz)	V _{CC} (V)	t _p (μS)	at δ (%)	P _L (W)	G _p (dB)	η _c (%)	PAGE
RX1214B80W	1.2 to 1.4	40	500	10	≥80	≥7	≥35	316
RX1214B130Y	1.2 to 1.4	50	150	5	≥130	≥7	≥35	316
RX1214B170W	1.2 to 1.4	42	500	10	≥170	≥6.7	≥40	322
RX1214B300Y	1.2 to 1.4	50	150	5	≥250	≥7	≥35	327
RX1214B350Y	1.2 to 1.4	50	130	6	≥280	≥7	≥40	332
RZ1214B35Y	1.2 to 1.4	50	150	5	≥35	≥7	≥30	338
RZ1214B65Y	1.2 to 1.4	50	150	5	≥70	≥7	≥35	342

S-band

TYPE NUMBER	f (GHz)	V _{CE} (V)	t _p (μS)	at δ (%)	P _L (W)	G _p (dB)	η _c (%)	PAGE
BLS2731-10	2.7 to 3.1	40	100	10	typ. 12.5	typ. 8	typ. 40	30
BLS2731-20	2.7 to 3.1	40	100	10	typ. 25	typ. 8	typ. 40	33
BLS2731-50	2.7 to 3.1	40	100	10	typ. 60	typ. 8	typ. 40	36
BLS2731-110	2.7 to 3.1	40	100	10	typ. 120	typ. 7	typ. 35	39
BLS2731-150	2.7 to 3.1	40	100	10	typ. 170	typ. 8	typ. 40	42

PULSED POWER TRANSISTORS FOR AVIONICS

TYPE NUMBER	f (GHz)	V _{CC} (V)	t _p (μS)	at δ (%)	P _L (W)	G _p (dB)	η _c (%)	PAGE
MF1011B900Y	1.09	50	10	1	800	≥6	≥40	189
MTB10010U	1.03	24	1	1	>9.5	>9.5	>50	196
MX0912B100Y	0.96 to 1.215	50	10	10	>100	>7	>42	201
MX1011B200Y	1.09	50	10	1	200	≥7.5	≥45	222
MX0912B251Y	0.96 to 1.215	50	10	10	>235	>7	>42	208
MX0912B351Y	0.96 to 1.215	50	10	10	>325	>7	>40	215
MX1011B700Y	1.09	50	10	1	650	≥6	≥48	230
MZ0912B50Y	0.96 to 1.215	50	10	10	>50	>7	>42	236
MZ0912B100Y	0.96 to 1.215	50	10	10	>100	>7	>42	201

Microwave transistors

Selection guide

LINEAR POWER TRANSISTORS

Class-A

TYPE NUMBER	f (GHz)	V _{CE} (V)	I _c (mA)	P _{L1} (W) note 1	G _{po} (dB) note 2	PAGE
LBE2003S	2	18	30	≥0.2	≥10	51
LBE2009S	2	18	110	≥0.7	≥9	51
LTE21015R	2	16	250	≥1.5	≥8.5	108
LTE21009R	2.1	16	150	≥0.6	≥10	104
LTE21025R	2.1	16	400	≥2.8	≥7.8	113
LTE42005S	4.2	18	110	≥0.45	≥6.6	117
LTE42008R	4.2	16	250	≥0.8	≥7	123
LTE42012R	4.2	16	400	≥1	≥6	130
LV1721E50R	1.7 to 2.1	16	1100	≥5	≥7	136
LV2024E45R	2 to 2.4	16	1100	≥4	≥6	140
LVE21050R	2.1	16	1100	≥5.5	≥8	146
LWE2010S	2.3	18	110	≥0.8	≥8	149
LWE2015R	2.3	16	250	≥1.2	≥7.5	155
LZ1418E100R	1.4 to 1.8	16	2000	≥9	≥10	184

Notes

1. Load power for 1 dB compressed power gain.
2. Low level power gain associated with P_{L1}.

Class-AB

TYPE NUMBER	f (GHz)	V _{CE} (V)	I _c (mA)	P _{L1} (W)	G _{po} (dB)	PAGE
LX1214E500X	1.2 to 1.4	24	150	≥50	≥11	160
LLE15180X	1.5	24	50	≥15	≥7.8	71
LLE15370X	1.5	24	300	≥33	≥8	78
LXE15450X	1.5	24	150	≥45	≥8	85
LFE15600X	1.5	24	200	≥55	≥8	64
LLE16045X	1.65	24	40	≥4.5	≥8.5	85
LLE16120X	1.65	24	100	≥11	≥8.7	92
LLE16350X	1.65	24	100	≥29	≥8	98
LXE16350X	1.65	24	300	≥32	≥9	174

Microwave transistors

Selection guide

CW POWER TRANSISTORS

TYPE NUMBER	CLASS	f (GHz)	V _{CC} (V)	P _L (W)	G _p (dB)	η _c (%)	PAGE
PLB16004U	C	1.6	28	≥4.5	≥8.5	≥40	242
PLB16012U	C	1.6	28	≥10	≥8	≥45	247
PLB16030U	B	1.6	28	≥30	≥7	≥45	252
PTB23001X	B	2	24	≥1	≥7	≥45	261
PTB23002U	B	2.3	28	≥2	≥9	≥45	267
PTB23003X	B	2	24	≥3	≥8.75	≥45	261
PTB23005X	B	2	24	≥5	≥9.2	≥50	261
PTB23006U	C	2	28	≥5	≥9	≥40	272
PTB32001X	B	3	24	≥1.3	≥8	≥35	278
PTB32003X	B	3	24	≥2.5	≥8	≥35	278
PTB32005X	B	3	24	≥4.5	≥8	≥35	278
PVB42004X	B	2	24	≥10	≥10	≥48	287
PXB16050U	C	1.65	28	≥45	≥8.5	≥45	291
PZ1418B15U	B	1.4 to 1.8	28	≥12.5	≥7	≥38	297
PZ1418B30U	B	1.4 to 1.8	28	≥27	≥7.3	≥38	302
PZ1721B25U	B	1.7 to 2.1	28	≥25	≥7	≥35	302
PZ2024B20U	B	2.0 to 2.4	28	≥20	≥6	≥35	302
PZB16035U	B	1.55	28	≥35	≥8	≥45	311

OSCILLATOR POWER TRANSISTORS

TYPE NUMBER	f (GHz)	V _{CE} (V)	I _c (mA)	P _L (mW)	PACKAGE	PAGE
PTC4001T	2.88 to 3.0	20; note 1	200	≥550	SOT440A	284
PPC5001T	5	20	200	≥450	SOT447A	257

Note

1. V_{CC} value.

MARKING CODES

Microwave Transistors

Marking codes

MARKING CODES

The microwave transistors in this book are normally marked with manufacturer's name or trademark, type designation and lot identification code. If space on the transistor package is insufficient for full type designation, the following marking codes may be used for identification.

TYPE NUMBER	MARKING CODE
LAE4001R	R8
LAE4002S	R9
LBE2003S	407
LBE2009S	409
LCE2009S	408
LEE1015T	1015T
LTE21009R	435
LTE21015R	436
LTE21025R	439
LTE42005S	502
LTE42008R	196
LTE42012R	198
LV1721E50R	1721E50R
LV2024E45R	2024E45R
LV2327E40R	2327E40R
LWE2015R	411
MTB10010U	10010U
MX1011B430W	MX1011B430W
PPC5001T	395
PTB23001X	2301X
PTB23003X	2303X
PTB23005X	2305X
PTB32001X	3201X
PTB32003X	3203X
PTB32005X	3205X
PTC4001T	440



GENERAL

	Page
Quality	16
Reliability grades	17
Batch release tests for Grade "X" and "Y" equivalents	19
Type designation code	20
Pro Electron type numbering for BLS-types	21
Rating systems	21
Letter symbols	22
Summary of symbols for microwave transistors	25
Operating recommendations	26
Mounting flanged microwave transistors	27
Application information	28

Microwave Transistors

General

QUALITY

Total Quality Management

Philips Semiconductors is a Quality Company, renowned for the high quality of our products and service. We keep alive this tradition by constantly aiming towards one ultimate standard, that of zero defects. This aim is guided by our Total Quality Management (TQM) system which is described in our Quality manuals. The basis is outlined the following paragraphs.

QUALITY ASSURANCE

Based on ISO 9000 standards, customer standards such as FDC, QS9000 and IBM MDQ. Our factories are certified to ISO 9000 by external inspectorates.

PARTNERSHIPS WITH CUSTOMERS

PPM co-operations, design-in agreements, ship-to-stock, just-in-time, self-qualification programmes and application support.

PARTNERSHIPS WITH SUPPLIERS

Ship-to-stock, statistical process control and ISO 9000 audits.

QUALITY IMPROVEMENT PROGRAMME

Continuous process and system improvement, design improvement, complete use of statistical process control, realization of our final objective of zero defects, and logistics improvement by ship-to-stock and just-in-time agreements.

Advanced quality planning

During the design and development of new products and processes, quality is built-in by advanced quality planning. Through failure-mode-and-effect analysis the critical parameters are detected and measures taken to ensure good performance on these parameters. The capability of process steps is also planned in this phase in preparation for production under statistical process control.

Product conformance

The assurance of product conformance is an integral part of our quality assurance (QA) practice. This is achieved by:

- Incoming material management through partnerships with suppliers.
- In-line quality assurance to monitor process reproducibility during manufacture and initiate any

necessary corrective action. Process steps are under statistical process control.

- Acceptance tests on finished products to verify conformance with the device specification. The test results are used for quality feedback and corrective actions. The inspection and test requirements are detailed in the general quality specifications SNW-EQ-611 part A.
- Periodic inspections to monitor and measure the conformance of products.
- Qualification tests (see SNW-EQ-611 part A).

Product reliability

With the increasing complexity of Original Equipment Manufacturer (OEM) equipment, component reliability must be extremely high. Our research laboratories and development departments study the failure mechanisms of semiconductors. Their studies result in design rules and process optimization for the highest built-in product reliability. Highly accelerated tests are applied to the products reliability evaluation. Rejects from reliability tests and from customer complaints are submitted to failure analysis, to result in corrective action.

Customer response

Our quality improvement depends on joint action with our customer. We need our customer's inputs and we invite constructive comments on all aspects of our performance. Please contact our local sales representative.

Recognition

The high quality of our products and services is demonstrated by many Quality Awards granted by major customers and international organizations.

Microwave Transistors

General

RELIABILITY GRADES

Microwave transistors are available from different quality levels which are listed as follows:

- **Standard grade**

This applies to devices following the designation rules as listed in the chapters "Type designation code" and "Pro Electron type numbering for BLS-types".

- **Grade "X" and "Y"**

These grades correspond respectively to the equivalent MIL-STD 19500 grades JANTX and JANTXV.

They have been subject to additional screening tests than those normally applied to the standard grade. The local sales organisation can confirm whether they are available for the type you have selected.

The majority of the devices included in this book may also be available in accordance with a space screening file similar to JANS or ESA/SCC5010.

Reliability grades (only for brazed cap devices and orders in excess of 50 parts)

OPERATION	MIL STD 750 METHOD	CONDITIONS	REQUIREMENTS (%)		
			STD GRADE	GRADE "X" ⁽¹⁾	GRADE "Y" ⁽²⁾
Assembly			100	100	100
Internal visual inspection		note 3	100	100	100
Capping			100	100	100
Stabilization bake	1032	T = 200 °C; duration 48 hours	100	100	100
Temperature cycling	1051	condition C; 20 cycles; no dwell at 25 °C	—	100	100
Constant acceleration	2006	20000 g axis Y1; P _{tot} ≤ 5 W	—	—	100
		10000 g axis Y1; P _{tot} > 5 W	—	—	100
Hermetic seal (brazed cap) fine gross	1071	condition H - FC43			
			100	100	100
			100	100	100
Serialisation			—	—	100
Initial electrical parameters		note 4	—	100 GO/NOGO	100 GO/NOGO
High temperature reverse bias (HTRB)	1039	T _{amb} = 150 °C; V _{CBmin} = 80% of published V _{CB} ; duration 48 hours	—	100	100
Interim electrical parameters		note 5	—	—	100 read and record

Microwave Transistors

General

OPERATION	MIL STD 750 METHOD	CONDITIONS	REQUIREMENTS (%)		
			STD GRADE	GRADE "X" ⁽¹⁾	GRADE "Y" ⁽²⁾
Power burn-in	1039	$T_{amb} = 125\text{ }^{\circ}\text{C}$; $V_{CB} = 10\text{ V}$; I_C reached when T_j average = $175\text{ }^{\circ}\text{C}$; duration 160 hours	—	—	100
Delta calculation		note 6	—	—	100
Other electrical parameters		note 4	100	100 GO/NOGO	read and record
Marking		as specified	100	100	100
External visual inspection	2071		100	100	100
Packing			100	100	100
Check for delivery		note 3			

Notes

- Grade "X" is equivalent to JANTX.
- Grade "Y" is equivalent to JANTXV.
- As per Philips component specification.
- Published DC, R_{th} and RF parameters.
- Interim electrical parameters are published.
- Published collector cut off current and forward current ratio. Delta limits are: Delta h_{FE} max = $\pm 20\%$ of initial value;
Delta cut off current max = $\pm 100\%$ of initial value or $\pm 10\%$ of published parameter limit (whichever is greater).

Microwave Transistors

General

BATCH RELEASE TESTS FOR GRADE "X" AND "Y" EQUIVALENTS

Group B; note 1.

INSPECTIONS	MIL STD 750 METHOD	CONDITIONS	SAMPLING PLAN LTPD ⁽²⁾	SMALL LOT QUALITY CONFORMANCE INSPECTION	
				NO. OF DEVICES	NO. OF FAILURES
Subgroup 1					
Solderability	2026	the sampling plan applies to the number of leads inspected. A minimum of 3 devices shall be tested.	15	4	0
Resistance to solvents	1022				
Subgroup 2					
Temperature cycling (air to air)	1051	no dwell at 25 °C; test condition C, except step 3 at 175 °C; 45 cycles including screening	10	6	0
Thermal shock	1056	10 cycles; condition A			
Hermetic seal fine leak gross leak	1071	test condition H; max. leak rate = 5 x 10 ⁻⁷ atm cc/s test condition C			
Electrical measurements		DC parameters of the relevant data sheet			
Subgroup 3					
Steady-state operation life	1027	as power burn-in except T _{mb} = 150 °C; duration 340 hours	10	12	0
Electrical measurements		DC parameters of the relevant data sheet			
Bond strength	2037	the sample shall include a minimum of 3 devices and shall include all wire sizes	20 (wires)	20 (wires)	0
Subgroup 4					
Decap internal visual (design criteria)	2075	visual criteria in accordance with qualified design		1	0
Subgroup 5 (not applicable)					
Subgroup 6					
High temperature life (non operating)	1032	340 hours at T _{amb} = 200 °C (brazed cap)	10	12	0
Electrical measurements		DC parameters of the relevant data sheet			

Notes

- Optional for grades "X" and "Y" (minimum order quantity = 50 devices).
- Sampling according to MIL-STD 19500. Small lot sampling applies for batches up to 500 devices.

Microwave Transistors

General

TYPE DESIGNATION CODE

Code structure

The standard structures of type designation code for microwave transistors can be shown as follows, where X represents a letter and 0 represents a numeral:

XXX0000X	for transistors without matching cell
XXX00000X	for transistors with input matching cell and specified for narrowband applications
XXX0000X00X or XXX0000X000X	for transistors specified for wideband applications

Letters

FIRST LETTER

The first letter shows the mode of operation:

L	linear
M	short pulse
P	CW class B
R	long pulse.

SECOND LETTER

The second letter shows the encapsulation:

A	SOT100
B	SOT441A (FO-45)
C	SOT442A (FO-46)
E	SOT122A
F	SOT448A (FO-231)
L	SOT437A (FO-229)
P	SOT447A (FO-102)
T	SOT440A (FO-41B)
V	SOT445A (FO-83A and FO-83B)
W	SOT446A (FO-93)
X	SOT439A (FO-91B)
Z	SOT443A (FO-57C).

THIRD LETTER

The third letter indicates the common potential:

E	common emitter
B	common base
C	common collector.

FOURTH LETTER (SUFFIX LETTER)

The fourth letter indicates the supply voltage:

Q	10 to 12 V
R	15 to 16 V
S	18 V
T	20 V or 18 to 21 V
U	28 to 30 V
W	40 to 45 V
X	24 V
Y	50 V
Z	48 V.

Numbers

TRANSISTORS WITHOUT MATCHING CELL (XXX0000X)

1st digit indicates frequency of measurement (GHz).

2nd, 3rd and 4th digits indicate power:

in watts for P, M and R modes of operation
in multiples of 100 mW for L mode of operation.

TRANSISTORS SPECIFIED FOR NARROWBAND APPLICATIONS (XXX00000X)

1st and 2nd digits indicate frequency of measurement ($\times 0.1$ GHz).

3rd, 4th and 5th digits give the power:

in watts for P, M and R modes of operation
in multiples of 100 mW for L mode of operation.

TRANSISTORS SPECIFIED FOR WIDEBAND APPLICATIONS

1st and 2nd digits indicate the lower frequency of use (in 0.1 GHz).

3rd and 4th digits indicate the higher frequency of use (in 0.1 GHz).

Last digit indicates the power:

in watts for P, M and R modes of operation
in multiples of 100 mW for L mode of operation.

Microwave Transistors

General

PRO ELECTRON TYPE NUMBERING FOR BLS-TYPES

Basic type number

This type designation code applies to discrete semiconductor devices (not integrated circuits), multiples of such devices, semiconductor chips and Darlington transistors. For this data handbook, only the relevant designation codes for BLS-types are described.

FIRST LETTER

The first letter gives information about the material for the active part of the device:

- B silicon or other material with a band gap of 1 to 1.3 eV.

SECOND LETTER

The second letter indicates the function for which the device is primarily designed:

- L transistor; power, high frequency.

The same letter can be used for multi-chip devices with similar elements. Power types are defined by

$$R_{th\ j-mb} \leq 15\ K/W.$$

SERIAL NUMBER

The number comprises of one letter followed by four digits for devices primarily intended for industrial or professional equipment. A hyphen followed by a number indicates the power in Watts of the device.

Example: BLS2731-10.

RATING SYSTEMS

The rating systems described are those recommended by the International Electrotechnical Commission (IEC) in its publication number 134.

Definitions of terms used

ELECTRONIC DEVICE

An electronic tube or valve, transistor or other semiconductor device. This definition excludes inductors, capacitors, resistors and similar components.

CHARACTERISTIC

A characteristic is an inherent and measurable property of a device. Such a property may be electrical, mechanical, thermal, hydraulic, electro-magnetic or nuclear, and can be expressed as a value for stated or recognized

conditions. A characteristic may also be a set of related values, usually shown in graphical form.

BOGEY ELECTRONIC DEVICE

An electronic device whose characteristics have the published nominal values for the type. A bogey electronic device for any particular application can be obtained by considering only those characteristics that are directly related to the application.

RATING

A value that establishes either a limiting capability or a limiting condition for an electronic device. It is determined for specified values of environment and operation, and may be stated in any suitable terms. Limiting conditions may be either maxima or minima.

RATING SYSTEM

The set of principles upon which ratings are established and which determine their interpretation. The rating system indicates the division of responsibility between the device manufacturer and the circuit designer, with the object of ensuring that the working conditions do not exceed the ratings.

Absolute maximum rating system

Absolute maximum ratings are limiting values of operating and environmental conditions applicable to any electronic device of a specified type, as defined by its published data, which should not be exceeded under the worst probable conditions.

These values are chosen by the device manufacturer to provide acceptable serviceability of the device, taking no responsibility for equipment variations, environmental variations, and the effects of changes in operating conditions due to variations in the characteristics of the device under consideration and of all other electronic devices in the equipment.

The equipment manufacturer should design so that, initially and throughout the life of the device, no absolute maximum value for the intended service is exceeded with any device, under the worst probable operating conditions with respect to supply voltage variation, equipment component variation, equipment control adjustment, load variations, signal variation, environmental conditions, and variations in characteristics of the device under consideration and of all other electronic devices in the equipment.

Microwave Transistors

General

Design maximum rating system

Design maximum ratings are limiting values of operating and environmental conditions applicable to a bogey electronic device of a specified type as defined by its published data, and should not be exceeded under the worst probable conditions.

These values are chosen by the device manufacturer to provide acceptable serviceability of the device, taking responsibility for the effects of changes in operating conditions due to variations in the characteristics of the electronic device under consideration.

The equipment manufacturer should design so that, initially and throughout the life of the device, no design maximum value for the intended service is exceeded with a bogey electronic device, under the worst probable operating conditions with respect to supply voltage variation, equipment component variation, variation in characteristics of all other devices in the equipment, equipment control adjustment, load variation, signal variation and environmental conditions.

Design centre rating system

Design centre ratings are limiting values of operating and environmental conditions applicable to a bogey electronic device of a specified type as defined by its published data, and should not be exceeded under normal conditions.

These values are chosen by the device manufacturer to provide acceptable serviceability of the device in average applications, taking responsibility for normal changes in operating conditions due to rated supply voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, environmental conditions, and variations in the characteristics of all electronic devices.

The equipment manufacturer should design so that, initially, no design centre value for the intended service is exceeded with a bogey electronic device in equipment operating at the stated normal supply voltage.

LETTER SYMBOLS

The letter symbols for transistors and signal diodes detailed in this section are based on IEC publication number 148.

Letter symbols for currents, voltages and powers

BASIC LETTERS

I, i current

V, v voltage

P, p power.

Upper-case letter symbols are used to represent all values except instantaneous values that vary with time, these are represented by lower-case letters.

SUBSCRIPTS

A, a anode terminal

(AV), (av) average value

B, b base terminal

C, c collector terminal

D, d drain terminal

E, e emitter terminal

F, f forward

G, g gate terminal

K, k cathode terminal

M, m peak value

O, o as third subscript: the terminal not mentioned is open-circuit

R, r as first subscript: reverse. As second subscript: repetitive. As third subscript: with a specified resistance between the terminal not mentioned and the reference terminal

(RMS), (rms) root-mean-square value

S, s as first or second subscript: source terminal (FETs only). As second subscript: non-repetitive (not FETs). As third subscript: short circuit between the terminal not mentioned and the reference terminal

X, x specified circuit

Z, z replaces R to indicate the actual working voltage, current or power of voltage reference and voltage reference diodes.

No additional subscript is used for DC values.

Upper-case subscripts are used for the indication of:

- Continuous (DC) values (without signal), e.g. I_B
- Instantaneous total values, e.g. i_B
- Average total values, e.g. $I_{B(AV)}$
- Peak total values, e.g. I_{BM}
- Root-mean-square total values, e.g. $I_{B(RMS)}$

Lower-case subscripts are used for the indication of values applying to the varying component alone:

- Instantaneous values, e.g. i_b

Microwave Transistors

General

- Root-mean-square values, e.g. $I_{b(rms)}$
- Peak values, e.g. I_{bm}
- Average values, e.g. $I_{b(av)}$

If more than one subscript is used, the subscript for which both styles exist are either all upper-case or all lower-case.

ADDITIONAL RULES FOR SUBSCRIPTS

Transistor currents

If it is necessary to indicate the terminal carrying the current, this should be done by the first subscript (conventional current flow from the external circuit into the terminal is positive).

Examples: I_B , i_B , I_b , i_b .

Diode currents

To indicate a forward current (conventional current flow into the anode terminal), the subscript F or f should be used. For a reverse current (conventional current flow out of the anode terminal), the subscript R or r should be used.

Examples: I_F , I_R , I_f , $I_{f(rms)}$.

Transistor voltages

If it is necessary to indicate the points between which a voltage is measured, this should be done by the first two subscripts. The first subscript indicates the terminal at which the voltage is measured and the second the reference terminal or the circuit node. Where there is no possibility of confusion, the second subscript may be omitted.

Examples: V_{BE} , V_{BE} , V_{be} , V_{bem} .

Diode voltages

To indicate a forward voltage (anode positive with respect to cathode), the subscript F or f should be used. For a reverse voltage (anode negative with respect to cathode), the subscript R or r should be used.

Examples: V_F , V_R , V_f , V_{rm} .

Supply voltages or currents

Supply voltages or supply currents are indicated by repeating the appropriate terminal subscript.

Examples: V_{CC} , I_{EE} .

If it is necessary to indicate a reference terminal, this should be done by a third subscript.

Example: V_{CCE} .

Subscripts for devices with more than one terminal of the same kind

If a device has more than one terminal of the same kind, the subscript is formed by the appropriate letter for the terminal, followed by a number. In the case of multiple subscripts, hyphens may be necessary to avoid confusion.

Examples:

- I_{B2} continuous (DC) current flowing into the second base terminal
- V_{B2-E} continuous (DC) voltage between the terminals of second base and emitter terminals.

Subscripts for multiple devices

For multiple unit devices, the subscripts are modified by a number preceding the letter subscript. In the case of multiple subscripts, hyphens may be necessary to avoid confusion.

Examples:

- I_{2C} continuous (DC) current flowing into the collector terminal of the second unit
- V_{1C-2C} continuous (DC) voltage between the collector terminals of the first and second units.

Application of the rules

Fig.1 represents a transistor collector current as a function of time. It comprises a continuous (DC) current and a varying component.

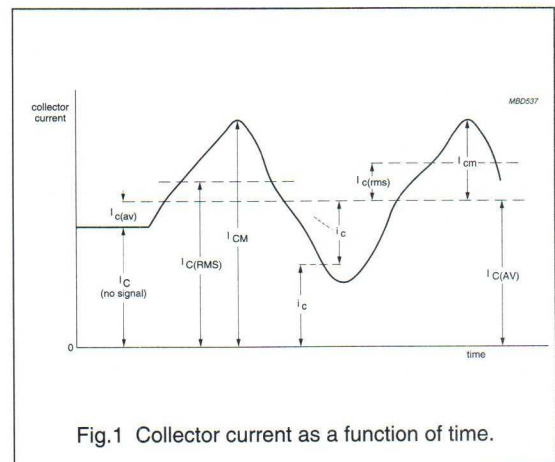


Fig.1 Collector current as a function of time.

Microwave Transistors

General

Letter symbols for electrical parameters

DEFINITION

For the purpose of this publication, the term 'electrical parameter' applies to four-pole matrix parameters, elements of electrical equivalent circuits, electrical impedances and admittances, inductances and capacitances.

BASIC LETTERS

The following list comprises the most important basic letters used for electrical parameters of semiconductor devices.

B, b	susceptance (imaginary part of an admittance)
C	capacitance
G, g	conductance (real part of an admittance)
H, h	hybrid parameter
L	inductance
R, r	resistance (real part of an impedance)
X, x	reactance (imaginary part of an impedance)
Y, y	admittance
Z, z	impedance.

Upper-case letters are used for the representation of:

- Electrical parameters of external circuits and of circuits in which the device forms only a part.
- All inductances and capacitances.

Lower-case letters are used for the representation of electrical parameters inherent in the device, with the exception of inductances and capacitances.

SUBSCRIPTS

General subscripts

The following list comprises the most important general subscripts used for electrical parameters of semiconductor devices.

F, f	forward (forward transfer)
I, i (or 1)	input
L, l	load
O, o (or 2)	output
R, r	reverse (reverse transfer)
S, s	source.

Examples: Z_s , h_i , h_F .

The upper-case variant of a subscript is used for the designation of static (DC) values.

Examples:

h_{FE}	static value of forward current transfer ratio in common-emitter configuration (DC current gain)
R_E	DC value of the external emitter resistance.

The static value is the slope of the line from the origin to the operating point on the appropriate characteristic curve, i.e. the quotient of the appropriate electrical quantities at the operating point.

The lower-case variant of a subscript is used for the designation of small-signal values.

Examples:

h_{fe}	small-signal value of the short-circuit forward current transfer ratio in common-emitter configuration
$Z_e = R_e + jX_e$	small-signal value of the external impedance.

If more than one subscript is used, subscripts for which both styles exist are either all upper-case or all lower-case.

Examples: h_{FE} , y_{RE} , h_{fe} .

Subscripts for four-pole matrix parameters

The first letter subscript (or double numeric subscript) indicates input, output, forward transfer or reverse transfer.

Examples: h_i (or h_{11}), h_o (or h_{22}), h_f (or h_{21}), h_r (or h_{12}).

A further subscript is used for the identification of the circuit configuration. When no confusion is possible, this further subscript may be omitted.

Examples: h_{fe} (or h_{21e}), h_{FE} (or h_{21E}).

DISTINCTION BETWEEN REAL AND IMAGINARY PARTS

If it is necessary to distinguish between real and imaginary parts of electrical parameters, no additional subscripts should be used. If basic symbols for the real and imaginary parts exist, these may be used.

Examples: $Z_i = R_i + jX_i$, $y_{fe} = g_{fe} + jb_{fe}$.

If such symbols do not exist, or if they are not suitable, the following notation is used:

Examples:

Re (h_{ib}) etc. for the real part of h_{ib}

Im (h_{ib}) etc. for the imaginary part of h_{ib} .

Microwave Transistors

General

Scattering parameters

In distinction to the conventional h-, y- and z-parameters, scattering parameters (s-parameters) relate to travelling wave conditions. Fig.2 shows a two-port network with the incident and reflected waves a_1 , b_1 , a_2 and b_2 .

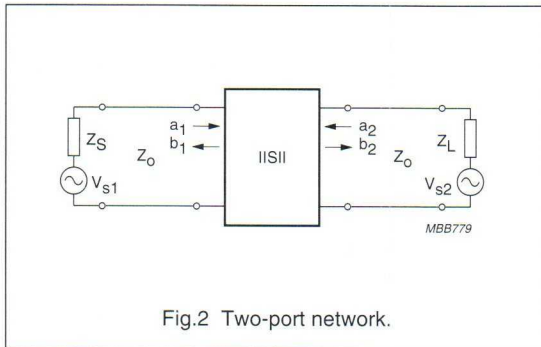


Fig.2 Two-port network.

$$\text{From Fig.2: } a_1 = \frac{V_{i1}}{\sqrt{Z_0}}; a_2 = \frac{V_{i2}}{\sqrt{Z_0}}; b_1 = \frac{V_{r1}}{\sqrt{Z_0}}; b_2 = \frac{V_{r2}}{\sqrt{Z_0}}$$

The squares of these quantities have the dimension of power.

Z_0 = characteristic impedance of the transmission line in which the two-port is connected

V_i = incident voltage

V_r = reflected (generated) voltage.

The four-pole equations for s-parameters are:

$$b_1 = s_{11}a_1 + s_{12}a_2$$

$$b_2 = s_{21}a_1 + s_{22}a_2.$$

Using the subscripts i for 11, r for 12, f for 21 and o for 22, it follows that:

$$s_i = s_{11} = \frac{b_1}{a_1} \mid a_2 = 0$$

$$s_r = s_{12} = \frac{b_1}{a_2} \mid a_1 = 0$$

$$s_f = s_{21} = \frac{b_2}{a_1} \mid a_2 = 0$$

$$s_o = s_{22} = \frac{b_2}{a_2} \mid a_1 = 0$$

The s-parameters can be named and expressed as follows:

$s_i = s_{11}$ input reflection coefficient: the complex ratio of the reflected wave and the incident wave at the input, under the conditions $Z_L = Z_0 = 50 \Omega$ and $V_{s2} = 0$

$s_r = s_{12}$ reverse transmission coefficient: the complex ratio of the generated wave at the input and the incident wave at the output, under the conditions $Z_S = Z_0 = 50 \Omega$ and $V_{s1} = 0$

$s_f = s_{21}$ forward transmission coefficient: the complex ratio of the generated wave at the output and the incident wave at the input, under the conditions $Z_L = Z_0 = 50 \Omega$ and $V_{s2} = 0$

$s_o = s_{22}$ output reflection coefficient: the complex ratio of the reflected wave and the incident wave at the output, under the conditions $Z_S = Z_0 = 50 \Omega$ and $V_{s1} = 0$.

SUMMARY OF SYMBOLS FOR MICROWAVE TRANSISTORS

C_{cb}	collector-base capacitance
C_{ce}	collector-emitter capacitance
C_{eb}	emitter-base capacitance
d_{im}	intermodulation distortion
δ	duty factor
F_{min}	noise factor
f	signal frequency
G_a	associated gain (for a low-noise transistor)
G_{ma}	maximum available gain
G_{ms}	maximum stable gain
G_p	power gain under specified conditions
G_{po}	low level power gain associated with P_{L1}
h_{FE}	DC current gain
I_C	DC collector current
I_{CBO}	collector cut-off current, open emitter
I_{CER}	collector cut-off current, with specified R_{BE}
I_{CES}	collector cut-off current, base connected to emitter
I_{CQ}	quiescent current
I_{EBO}	emitter cut-off current, open collector
η_C	collector efficiency $P_L / (I_C \times V_{CC})$
η_{add}	power added efficiency $(P_{out} - P_{in}) / (I_C \times V_{CC})$

Microwave Transistors

General

P_{in}	input power
P_L	load power under specified conditions
P_{L1}	load power for 1 dB compressed power gain
P_{out}	output power
P_{tot}	total power dissipation
$R_{th\ j-c}$	thermal resistance from junction to case
$R_{th\ j-mb}$	thermal resistance from junction to mounting base
$R_{th\ mb-j}$	thermal resistance from mounting base to heatsink
T_j	junction temperature
t_p	pulse width
T_{sld}	lead soldering temperature
T_{stg}	storage temperature
V_{CBO}	collector-base voltage, open emitter
V_{CC}	collector supply voltage
V_{CE}	collector-emitter voltage
V_{CEO}	collector-emitter voltage, open base
V_{CER}	collector-emitter voltage with specified R_{BE}
V_{CES}	collector-emitter voltage, base connected to emitter
V_{EBO}	emitter-base voltage, open collector
VSWR	voltage standing wave ratio
z_i	complex transistor impedance as seen by the generator
Z_L	complex transistor load impedance as seen by the transistor
Z_{th}	thermal impedance from junction to heatsink.

OPERATING RECOMMENDATIONS

These recommendations are included for the avoidance of damage or destruction of silicon bipolar transistors operating at high frequencies and high power during testing, setting-up procedures and final operation.

Polarization

A current-limiting power supply should be used when testing transistors in a new circuit.

Initial testing at reduced supply voltage is discouraged because the resulting change in output impedance could cause oscillation due to mismatch.

The RF blocking choke in the supply line, together with the DC blocking capacitor of the internal output prematching

circuit of the transistor, could sometimes cause oscillations at very low frequencies. The oscillations can often be removed by bypassing the choke with a low value resistor.

Operation

INPUT POWER

When the circuit has not been optimized, the average power input should be kept a lower level than specified. Initial testing of CW amplifiers is best performed in pulsed operation at 50% duty factor. For pulsed amplifiers, the duty factor should be reduced.

OUTPUT WAVEFORM

The output waveform should be checked with a spectrum analyser or similar equipment to ensure that no parasitic effects causing unwanted modulation are present.

FREQUENCY

Microwave performance is published in the data sheet at a single frequency or for a range of frequencies. Devices whose data is published for narrow band application can normally be used at frequencies other than that specified. However, for high power types in particular, broadband operation may be difficult to obtain and the gain of transistors with an internal input prematching network may decrease sharply at higher frequencies.

Broadband transistors (generally those with type numbers starting with two letters followed by four digits) also have an output prematching network. This is essentially a high-pass filter with a resonance frequency below the lowest operating frequency. The transistor could be damaged if operated at this resonance frequency, therefore the manufacturer should be consulted if extended frequency operation is required.

Thermal considerations

The junction temperature is of paramount importance in the reliability of transistors and every effort should be made to keep this temperature as low as possible. This is affected by mechanical aspects of the fitting, therefore mounting recommendations given by the manufacturer should be followed.

Values of thermal resistance given in the data sheets are for a specific junction temperature. Note that thermal resistance from junction to mounting base increases with junction temperature at approximately 0.3%/K.

For transistors required for pulsed operation, an equivalent thermal impedance is given for a specified pulse format

Microwave Transistors

General

(pulse width and duty factor). This allows for calculation of peak junction temperature (at the end of a pulse). For widely differing pulse formats the manufacturer should be consulted.

The maximum power dissipation is defined as

$$P_{\text{tot}} = V_{\text{CE}} \times I_{\text{C}} - P_{\text{o}} + P_{\text{i}} \text{ at } T_{\text{j}} = 200 \text{ }^{\circ}\text{C}.$$

MOUNTING FLANGED MICROWAVE TRANSISTORS

Flanged microwave transistors are easy to mount but for best performance we offer the following recommendations.

Holes or tapped holes in the heatsink should be free from burrs and spaced between centres at:

14.2 mm for SOT440A, SOT445A and SOT437A

16.5 mm for SOT443A

19.0 mm for SOT439A, SOT422A and SOT423A.

Use a washer to spread the joint pressure.

Mounting recommendations

- Minimum depth of tapped holes in heatsinks is 6 mm.
- Use 4-40 UNC-2A cheese-head screws with a flat washer to spread the joint pressure.
- For transistors dissipating up to 80 W, the heatsink thickness should be at least 3 mm copper (> 99.9% ETP-Cu) or 5 mm aluminium (99% Al). The thickness of the heatsink should be increased proportionally for transistors dissipating more power.
- The minimum flatness of the mounting area is 0.02 mm.
- Mounting area roughness should be less than 0.5 μm .
- Connections between transistor and amplifier circuits should be as short as possible. Also, the distance between input and output printed circuit board should be the minimum required to accept the maximum specified dimensions of the transistor header. If any tolerance remains, the best performance is usually obtained by pushing the transistor towards the output side.
- Avoid, as much as possible, use of flux or flux solutions because flux can penetrate even hermetically sealed ceramic-capped transistors. Tin and wash the printed-circuit boards **before** mounting the power

transistors, then solder the transistors into place without using flux.

- Transistor leads may be tinned by dipping them full-length into a solder bath at a temperature of about 230 $^{\circ}\text{C}$. No flux should be used during tinning.
- Recommended heatsink compounds: WPS II (silicone-free) from Austerlitz-Electronics; Comp. Trans. from KF; 340 from Dow Corning; Trans-Heat from E. Friis-Mikkelsen.
- When a transistor is removed from a heatsink, the flange, almost certainly, will have been distorted by the joint pressure. Grinding or lapping of the flange to the required flatness and smoothness is necessary before the transistor is remounted.

Mounting sequence

- Apply a thin layer of evenly-distributed heatsink compound to the flange.
- Position the device with flat washers in place.
- Tighten the screws until finger-tight (0.05 Nm).
- Further tighten the screws until the specified torque is reached (do not lubricate); for torques, refer to the package outlines section of this data handbook.
- To lock mounting screws, allow about 30 minutes for them to bed-down after the specified torque has been applied, re-tighten to the specified torque and apply locking paint.

Microwave Transistors

General

APPLICATION INFORMATION

COMPONENT	DESCRIPTION	VALUE	DIMENSIONS	TYPE NUMBER
A	amplifier			1/4 MC3403 or equivalent
D.U.T.	microwave transistor			
TR	transistor			2N2219 or equivalent
D	diode			1N4148 or equivalent
C1, C2	tantalum capacitor	22 μ F, 50 V		
R1	resistor	2.2 k Ω $\pm$ 5%		
R2, R3, R5, R6	resistor	10 k Ω $\pm$ 5%		
R4	resistor	4.7 k Ω $\pm$ 5%		
R _p	resistor	10 k Ω $\pm$ 5%	10 turns	
R _b , R _c , R _e , R _x	resistor	note 1		

Note

1. Values to be adapted to I_c of the D.U.T.

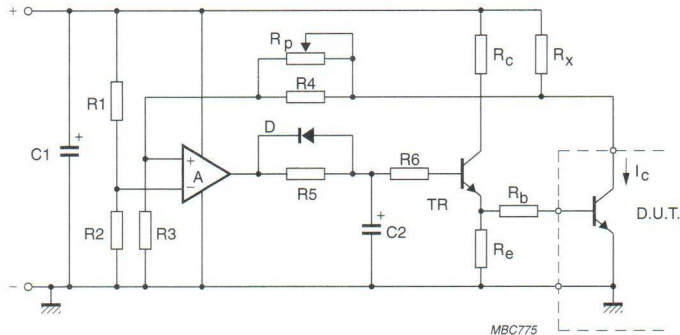


Fig.3 Bias circuit for a class-A linear microwave transistor.

DEVICE DATA

in alphanumeric sequence

Microwave power transistor

BLS2731-10

FEATURES

- Suitable for short and medium pulse applications
- Internal input and output matching networks for an easy circuit design
- Emitter ballasting resistors improve ruggedness
- Gold metallization ensures excellent reliability
- Interdigitated emitter-base structure provides high emitter efficiency
- Multicell geometry improves power sharing and reduces thermal resistance.

APPLICATION


- Common base class-C pulsed power amplifiers for radar applications in the 2.7 to 3.1 GHz band.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a 2-lead rectangular flange package with a ceramic cap (SOT445A) with the common base connected to the flange.

PINNING

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

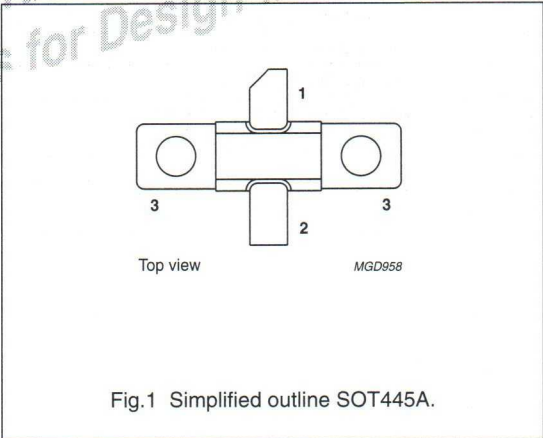

QUICK REFERENCE DATA

RF performance at $T_h = 25\text{ }^{\circ}\text{C}$ in a common base class-C test circuit.

MODE OF OPERATION	f (GHz)	V_{CB} (V)	P_L (W)	G_p (dB)	η_c (%)
Pulsed class-C	2.7 to 3.1	40	12.5	typ. 8	typ. 40

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO disc is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.


Microwave power transistor

BLS2731-10

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V _{CBO}	collector-base voltage	open emitter	–	70	V
V _{CES}	collector-emitter voltage	R _{BE} = 0 Ω	–	65	V
V _{EBO}	emitter-base voltage	open collector	–	2	V
I _{CM}	peak collector current	t _p ≤ 100 μs; δ ≤ 10%	–	1.5	A
P _{tot}	total power dissipation	t _p = 100 μs; δ = 10%; T _{mb} = 25 °C	–	35	W
T _{stg}	storage temperature		–65	+200	°C
T _j	operating junction temperature		–	200	°C
T _{sld}	soldering temperature	up to 0.2 mm from ceramic cap; t ≤ 10 s	–	235	°C

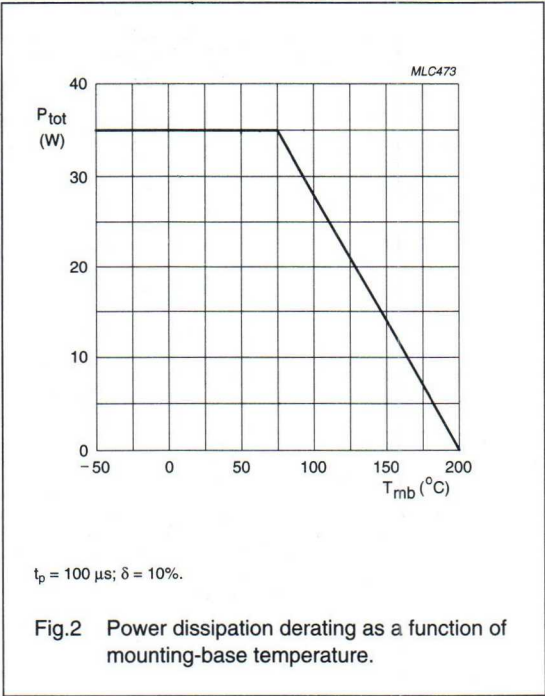

Microwave power transistor

BLS2731-10

CHARACTERISTICS

 $T_j = 25\text{ }^{\circ}\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_{(BR)CBO}$	collector-base breakdown voltage	$I_C = 2.5\text{ mA}$; open emitter	70	—	—	V
$V_{(BR)CES}$	collector-emitter breakdown voltage	$I_C = 2.5\text{ mA}$; $V_{BE} = 0$	65	—	—	V
I_{CBO}	collector leakage current	$V_{CB} = 40\text{ V}$; $I_E = 0$	—	—	0.3	mA
I_{CES}	collector leakage current	$V_{CE} = 40\text{ V}$; $V_{BE} = 0$	—	—	0.5	mA
I_{EBO}	emitter leakage current	$V_{EB} = 1.5\text{ V}$; $I_C = 0$	—	—	0.1	mA
h_{FE}	DC current gain	$V_{CB} = 5\text{ V}$; $I_C = 0.25\text{ A}$	25	—	—	
C_c	collector capacitance (die only)	$V_{CE} = 1\text{ V}$; $I_E = i_e = 0$; $f = 1\text{ MHz}$	—	10	—	pF

THERMAL RESISTANCE

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting-base	$T_j = 100\text{ }^{\circ}\text{C}$	6.7	K/W
$R_{th\ mb-h}$	thermal resistance from mounting-base to heatsink		0.2	K/W
$Z_{th\ j-h}$	thermal impedance from junction to heatsink	$t_p = 100\text{ }\mu\text{s}$; $\delta = 10\%$; note 1	2.46	K/W

Note

1. Equivalent thermal impedance under pulsed microwave operating conditions.

APPLICATION INFORMATION

RF performance at $T_h = 25\text{ }^{\circ}\text{C}$ in a common-base test circuit.

MODE OF OPERATION	f (GHz)	V_{CE} (V)	P_L (W)	G_p (dB)	η_c (%)
Class-C; $t_p = 100\text{ }\mu\text{s}$; $\delta = 10\%$	2.7 to 2.9	40	≥ 10 typ. 12.5	≥ 7 typ. 8	≥ 35 typ. 40

Microwave power transistor

BLS2731-20

FEATURES

- Suitable for short and medium pulse applications
- Internal input and output matching networks for an easy circuit design
- Emitter ballasting resistors improve ruggedness
- Gold metallization ensures excellent reliability
- Interdigitated emitter-base structure provides high emitter efficiency
- Multicell geometry improves power sharing and reduces thermal resistance.

APPLICATION


- Common base class-C pulsed power amplifiers for radar applications in the 2.7 to 3.1 GHz band.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a 2-lead rectangular flange package with a ceramic cap (SOT445A) with the common base connected to the flange.

PINNING

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

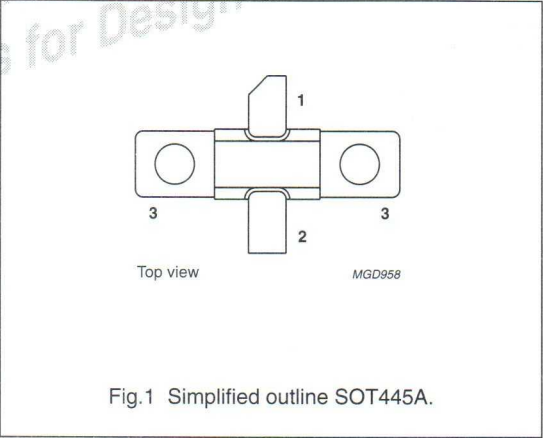

QUICK REFERENCE DATA

RF performance at $T_h = 25\text{ }^{\circ}\text{C}$ in a common base class-C test circuit.

MODE OF OPERATION	f (GHz)	V _{CB} (V)	P _L (W)	G _p (dB)	η _c (%)
Pulsed class-C	2.7 to 3.1	40	25	typ. 8	typ. 40

WARNING
Product and environmental safety - toxic materials
This product contains beryllium oxide. The product is entirely safe provided that the BeO disc is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.


Microwave power transistor

BLS2731-20

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V _{CBO}	collector-base voltage	open emitter	–	70	V
V _{CES}	collector-emitter voltage	R _{BE} = 0 Ω	–	65	V
V _{EBO}	emitter-base voltage	open collector	–	2	V
I _{CM}	peak collector current	t _p ≤ 100 μs; δ ≤ 10%	–	3	A
P _{tot}	total power dissipation	t _p = 100 μs; δ = 10%; T _{mb} = 25 °C	–	60	W
T _{stg}	storage temperature		–65	+200	°C
T _j	operating junction temperature		–	200	°C
T _{slid}	soldering temperature	up to 0.2 mm from ceramic cap; t ≤ 10 s	–	235	°C

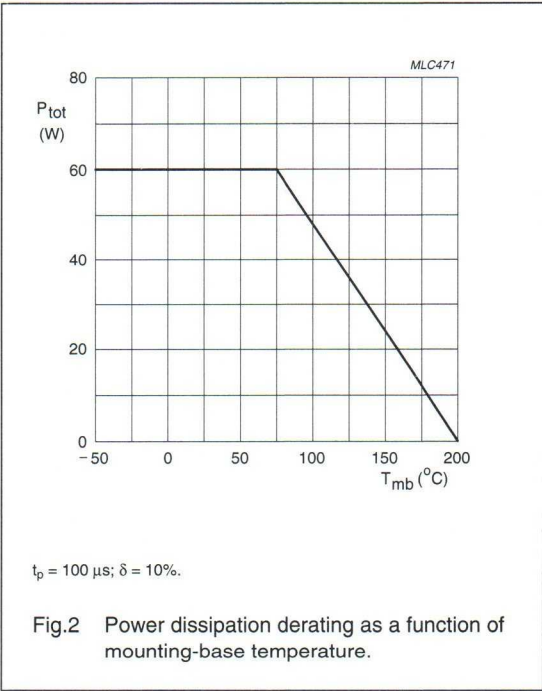

Microwave power transistor

BLS2731-20

CHARACTERISTICS

 $T_j = 25\text{ }^{\circ}\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_{(BR)CBO}$	collector-base breakdown voltage	$I_C = 5\text{ mA}$; open emitter	70	—	—	V
$V_{(BR)CES}$	collector-emitter breakdown voltage	$I_C = 5\text{ mA}$; $V_{BE} = 0$	65	—	—	V
I_{CBO}	collector leakage current	$V_{CB} = 40\text{ V}$; $I_E = 0$	—	—	0.5	mA
I_{CES}	collector leakage current	$V_{CE} = 40\text{ V}$; $V_{BE} = 0$	—	—	1	mA
I_{EBO}	emitter leakage current	$V_{EB} = 1.5\text{ V}$; $I_C = 0$	—	—	0.1	mA
h_{FE}	DC current gain	$V_{CB} = 5\text{ V}$; $I_C = 0.5\text{ A}$	25	—	—	
C_c	collector capacitance (die only)	$V_{CE} = 1\text{ V}$; $I_E = i_e = 0$; $f = 1\text{ MHz}$	—	10	—	pF

THERMAL RESISTANCE

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting-base	$T_j = 100\text{ }^{\circ}\text{C}$	4.16	K/W
$R_{th\ mb-h}$	thermal resistance from mounting-base to heatsink		0.2	K/W
$Z_{th\ j-h}$	thermal impedance from junction to heatsink	$t_p = 100\text{ }\mu\text{s}$; $\delta = 10\%$; note 1	1.44	K/W

Note

1. Equivalent thermal impedance under pulsed microwave operating conditions.

APPLICATION INFORMATION

RF performance at $T_h = 25\text{ }^{\circ}\text{C}$ in a common-base test circuit.

MODE OF OPERATION	f (GHz)	V_{CE} (V)	P_L (W)	G_p (dB)	η_c (%)
Class-C; $t_p = 100\text{ }\mu\text{s}$; $\delta = 10\%$	2.7 to 2.9	40	≥ 20 typ. 25	≥ 7 typ. 8	≥ 35 typ. 40

Microwave power transistor

BLS2731-50

FEATURES

- Suitable for short and medium pulse applications
- Internal input and output matching networks for an easy circuit design
- Emitter ballasting resistors improve ruggedness
- Gold metallization ensures excellent reliability
- Interdigitated emitter-base structure provides high emitter efficiency
- Multicell geometry improves power sharing and reduces thermal resistance.

APPLICATIONS


- Common base class-C pulsed power amplifiers for radar applications in the 2.7 to 3.1 GHz band.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a 2-lead rectangular flange package with a ceramic cap (SOT422A) with the common base connected to the flange.

PINNING SOT422A

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

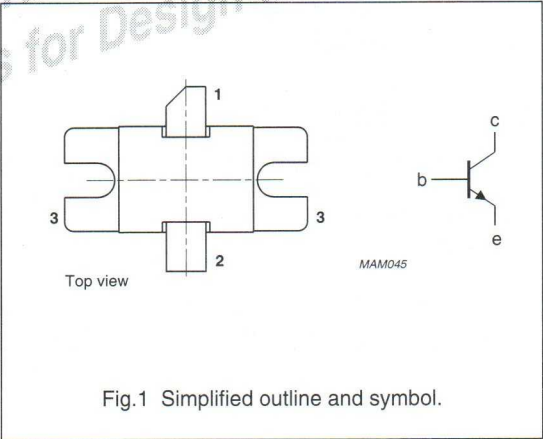

QUICK REFERENCE DATA

RF performance at $T_h = 25\text{ }^{\circ}\text{C}$ in a common base class-C test circuit.

MODE OF OPERATION	f (GHz)	V_{CB} (V)	P_L (W)	G_p (dB)	η_c (%)
Pulsed class-C	2.7 to 3.1	40	60	typ. 8	typ. 40

WARNING
Product and environmental safety - toxic materials
This product contains beryllium oxide. The product is entirely safe provided that the BeO disc is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.


Microwave power transistor

BLS2731-50

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	–	70	V
V_{CES}	collector-emitter voltage	$R_{BE} = 0 \, \Omega$	–	65	V
V_{EBO}	emitter-base voltage	open collector	–	2	V
I_{CM}	peak collector current	$t_p \leq 100 \, \mu s; \delta \leq 10 \, \%$	–	6	A
P_{tot}	total power dissipation	$t_p = 100 \, \mu s; \delta = 10 \, \%;$ $T_{mb} = 25 \, ^\circ C$	–	180	W
T_{stg}	storage temperature		–65	+200	$^\circ C$
T_j	operating junction temperature		–	+200	$^\circ C$
T_{slid}	soldering temperature	up to 0.2 mm from ceramic cap; $t \leq 10 \, s$	–	+235	$^\circ C$

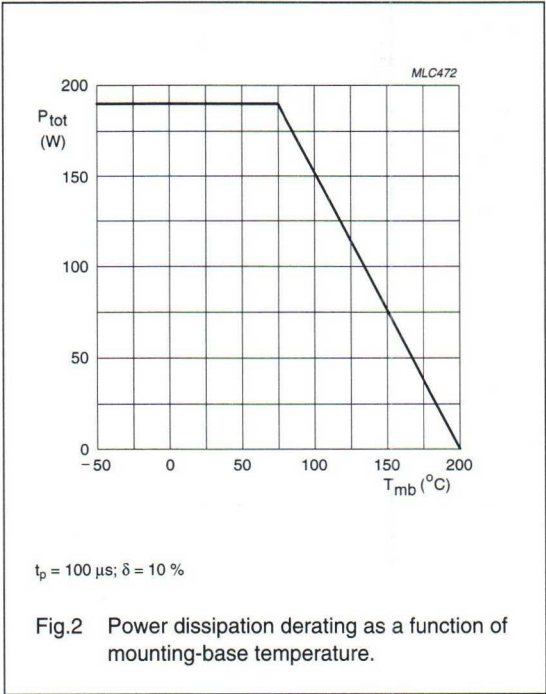

Microwave power transistor

BLS2731-50

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting-base	$T_j = 100\ ^\circ\text{C}$	1.69	K/W
$R_{th\ mb-h}$	thermal resistance from mounting-base to heatsink	note 1	0.2	K/W
$Z_{th\ j-h}$	thermal impedance from junction to heatsink	$t_p = 100\ \mu\text{s}$; $\delta = 10\ \%$; notes 1 and 2	0.44	K/W

Notes

1. See "Mounting recommendations in the General part of handbook SC15".
2. Equivalent thermal impedance under pulsed microwave operating conditions.

CHARACTERISTICS

$T_j = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_{(BR)CBO}$	collector-base breakdown voltage	$I_C = 15\ \text{mA}$; open emitter	70	—	—	V
$V_{(BR)CES}$	collector-emitter breakdown voltage	$I_C = 15\ \text{mA}$; $V_{BE} = 0$	65	—	—	V
I_{CBO}	collector leakage current	$V_{CB} = 40\ \text{V}$; $I_E = 0$	—	—	1.5	mA
I_{CES}	collector leakage current	$V_{CE} = 40\ \text{V}$; $V_{BE} = 0$	—	—	3	mA
I_{EBO}	emitter leakage current	$V_{EB} = 1.5\ \text{V}$; $I_C = 0$	—	—	0.3	mA
h_{FE}	DC current gain	$V_{CB} = 5\ \text{V}$; $I_C = 1.5\ \text{A}$	25	—	—	
C_c	collector capacitance (die only)	$V_{CE} = 1\ \text{V}$; $I_E = i_e = 0$; $f = 1\ \text{MHz}$	—	30	—	pF

APPLICATION INFORMATION

RF performance at $T_h = 25\ ^\circ\text{C}$ in a common-base test circuit.

MODE OF OPERATION	f (GHz)	V_{CE} (V)	P_L (W)	G_p (dB)	η_c (%)
Class-C; $t_p = 100\ \mu\text{s}$; $\delta = 10\ \%$	2.7 to 2.9	40	≥ 50 typ. 60	≥ 7 typ. 8	≥ 35 typ. 40

Microwave power transistor

BLS2731-110

FEATURES

- Suitable for short and medium pulse applications
- Internal input and output matching networks for an easy circuit design
- Emitter ballasting resistors improve ruggedness
- Gold metallization ensures excellent reliability
- Interdigitated emitter-base structure provides high emitter efficiency
- Multicell geometry improves power sharing and reduces thermal resistance.

APPLICATIONS


- Common base class-C pulsed power amplifiers for radar applications in the 2.7 to 3.1 GHz band.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a 2-lead rectangular flange package with a ceramic cap (SOT423A) with the common base connected to the flange.

PINNING - SOT423A

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

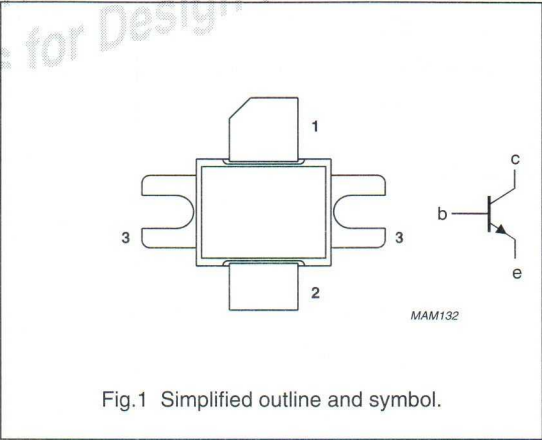

QUICK REFERENCE DATA

RF performance at $T_h = 25\text{ }^{\circ}\text{C}$ in a common base class-C test circuit.

MODE OF OPERATION	f (GHz)	V_{CB} (V)	P_L (W)	G_p (dB)	η_c (%)
Pulsed class-C	2.7 to 3.1	40	120	typ. 7	typ. 35

WARNING
Product and environmental safety - toxic materials
This product contains beryllium oxide. The product is entirely safe provided that the BeO disc is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.


Microwave power transistor

BLS2731-110

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V _{CBO}	collector-base voltage	open emitter	–	70	V
V _{CES}	collector-emitter voltage	R _{BE} = 0 Ω	–	65	V
V _{EBO}	emitter-base voltage	open collector	–	2	V
I _{CM}	peak collector current	t _p ≤ 100 μs; δ ≤ 10 %	–	12	A
P _{tot}	total power dissipation	t _p = 100 μs; δ = 10 %; T _{mb} = 25 °C	–	280	W
T _{stg}	storage temperature		–65	+200	°C
T _j	operating junction temperature		–	200	°C
T _{sld}	soldering temperature	up to 0.2 mm from ceramic cap; t ≤ 10 s	–	235	°C

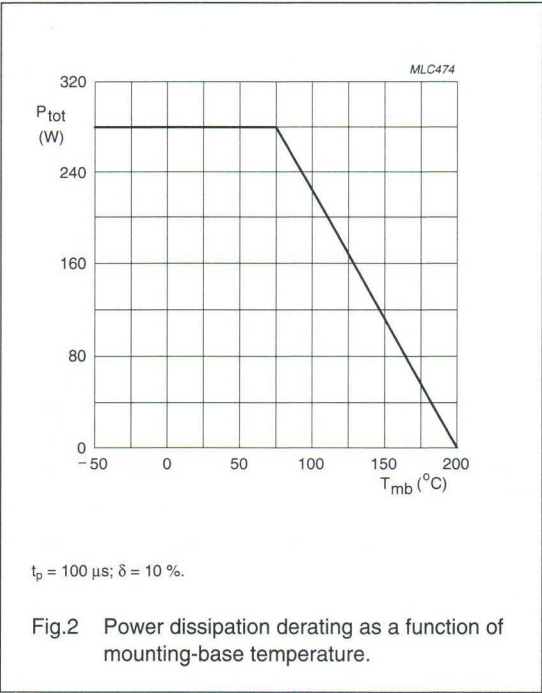

Microwave power transistor

BLS2731-110

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting-base	$T_j = 100\ ^\circ\text{C}$	1	K/W
$R_{th\ mb-h}$	thermal resistance from mounting-base to heatsink	note 1	0.2	K/W
$Z_{th\ j-h}$	thermal impedance from junction to heatsink	$t_p = 100\ \mu\text{s}$; $\delta = 10\ \%$; notes 1 and 2	0.3	K/W

Notes

1. See "Mounting recommendations in the General part of handbook SC15".
2. Equivalent thermal impedance under pulsed microwave operating conditions.

CHARACTERISTICS

$T_j = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_{(BR)CBO}$	collector-base breakdown voltage	$I_C = 45\ \text{mA}$; open emitter	70	—	—	V
$V_{(BR)CES}$	collector-emitter breakdown voltage	$I_C = 45\ \text{mA}$; $V_{BE} = 0$	65	—	—	V
I_{CBO}	collector leakage current	$V_{CB} = 40\ \text{V}$; $I_E = 0$	—	—	3	mA
I_{CES}	collector leakage current	$V_{CE} = 40\ \text{V}$; $V_{BE} = 0$	—	—	6	mA
I_{EBO}	emitter leakage current	$V_{EB} = 1.5\ \text{V}$; $I_C = 0$	—	—	0.6	mA
h_{FE}	DC current gain	$V_{CB} = 5\ \text{V}$; $I_C = 3\ \text{A}$	25	—	—	
C_c	collector capacitance (die only)	$V_{CE} = 1\ \text{V}$; $I_E = i_e = 0$; $f = 1\ \text{MHz}$	—	60	—	pF

APPLICATION INFORMATION

RF performance at $T_h = 25\ ^\circ\text{C}$ in a common-base test circuit.

MODE OF OPERATION	f (GHz)	V_{CE} (V)	P_L (W)	G_P (dB)	η_c (%)
Class-C; $t_p = 100\ \mu\text{s}$; $\delta = 10\ \%$	2.7 to 3.1	40	≥ 110 typ. 120	≥ 6.5 typ. 7	≥ 33 typ. 35

Microwave power transistor

BLS2731-150

FEATURES

- Matched internally to 50 Ω
- Suitable for short and medium and long pulse applications
- Internal input and output matching networks for an easy circuit design
- Emitter ballasting resistors improve ruggedness
- Gold metallization ensures excellent reliability
- Interdigitated emitter-base structure provides high emitter efficiency
- Multicell geometry improves power sharing and reduces thermal resistance.

APPLICATIONS


- Common base class-C pulsed power amplifiers for radar applications in the 2.7 to 3.1 GHz band.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a 2-lead rectangular flange package with a ceramic cap (SOT469A) with the common base connected to the flange.

PINNING - SOT469A

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

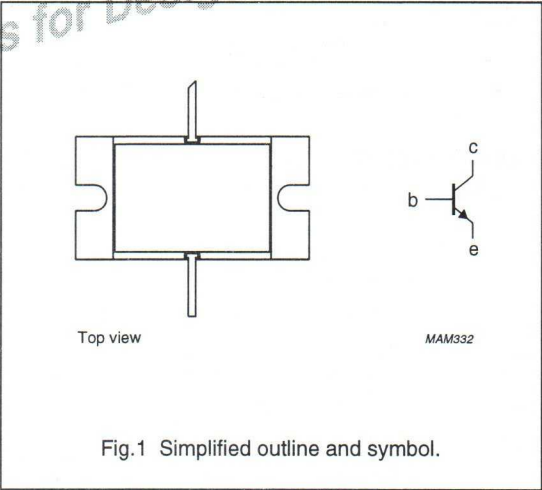

QUICK REFERENCE DATA

RF performance at $T_h = 25\text{ }^\circ\text{C}$ in a common base class-C test circuit.

MODE OF OPERATION	f (GHz)	V_{CB} (V)	P_L (W)	G_p (dB)	η_c (%)
Pulsed class-C	2.7 to 3.1	40	typ.170	typ. 8	typ. 40

WARNING
Product and environmental safety - toxic materials
This product contains beryllium oxide. The product is entirely safe provided that the BeO disc is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.


Microwave power transistor

BLS2731-150

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V _{CBO}	collector-base voltage	open emitter	–	70	V
V _{CES}	collector-emitter voltage	R _{BE} = 0 Ω	–	65	V
V _{EBO}	emitter-base voltage	open collector	–	2	V
I _{CM}	peak collector current	t _p ≤ 300 μs; δ ≤ 10%	–	12	A
P _{tot}	total power dissipation	t _p = 300 μs; δ = 10%; T _{mb} = 25 °C	–	280	W
T _{stg}	storage temperature		–65	+200	°C
T _j	operating junction temperature		–	+200	°C
T _{sld}	soldering temperature	up to 0.2 mm from ceramic cap; t ≤ 10 s	–	+235	°C

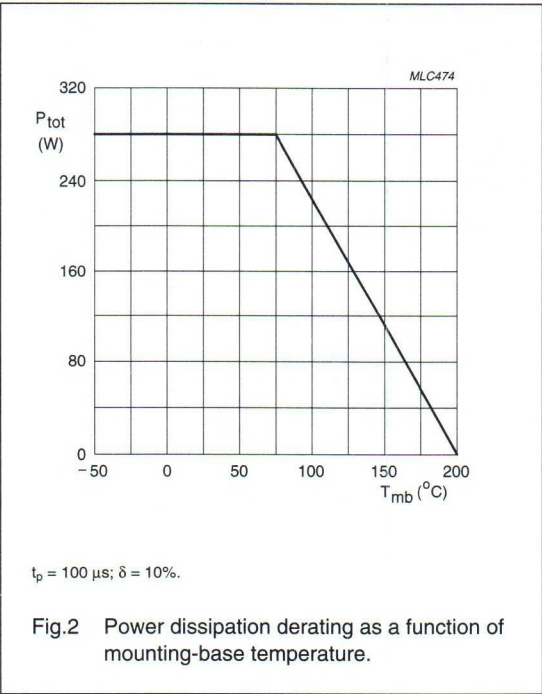

Microwave power transistor

BLS2731-150

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting-base	$T_j = 100\ ^\circ\text{C}$	1	K/W
$R_{th\ mb-h}$	thermal resistance from mounting-base to heatsink	note 1	0.2	K/W
$Z_{th\ j-h}$	thermal impedance from junction to heatsink	$t_p = 100\ \mu\text{s}$; $\delta = 10\ \%$; notes 1 and 2	0.3	K/W

Notes

1. See "Mounting recommendations in the General part of handbook SC15".
2. Equivalent thermal impedance under pulsed microwave operating conditions.

CHARACTERISTICS

$T_j = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_{(BR)CBO}$	collector-base breakdown voltage	$I_C = 45\ \text{mA}$; open emitter	70	—	—	V
$V_{(BR)CES}$	collector-emitter breakdown voltage	$I_C = 45\ \text{mA}$; $V_{BE} = 0$	65	—	—	V
I_{CBO}	collector leakage current	$V_{CB} = 40\ \text{V}$; $I_E = 0$	—	—	3	mA
I_{CES}	collector leakage current	$V_{CE} = 40\ \text{V}$; $V_{BE} = 0$	—	—	6	mA
I_{EBO}	emitter leakage current	$V_{EB} = 1.5\ \text{V}$; $I_C = 0$	—	—	0.6	mA
h_{FE}	DC current gain	$V_{CB} = 5\ \text{V}$; $I_C = 3\ \text{A}$	25	—	—	
C_c	collector capacitance (die only)	$V_{CE} = 1\ \text{V}$; $I_E = I_E = 0$; $f = 1\ \text{MHz}$	—	60	—	pF

APPLICATION INFORMATION

RF performance at $T_h = 25\ ^\circ\text{C}$ in a common-base test circuit.

MODE OF OPERATION	f (GHz)	V_{CE} (V)	P_L (W)	G_p (dB)	η_c (%)
Class-C; $t_p = 100\ \mu\text{s}$; $\delta = 10\%$	2.7 to 3.1	40	≥ 150 typ. 170	≥ 7 typ. 8	≥ 35 typ. 40

NPN microwave power transistor

LAE4001R

FEATURES

- Self-aligned process entirely ion implanted and gold sandwich metallization
- Optimum temperature profile
- Excellent performance and reliability.

APPLICATIONS


Common emitter class A linear power amplifiers up to 4 GHz.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT100 metal ceramic package with emitter connected to the metallized lid. A miniature ceramic encapsulation is used for compatibility with stripline microwave circuits.

PINNING - SOT100

PIN	DESCRIPTION
1	collector
2	emitter
3	base
4	emitter

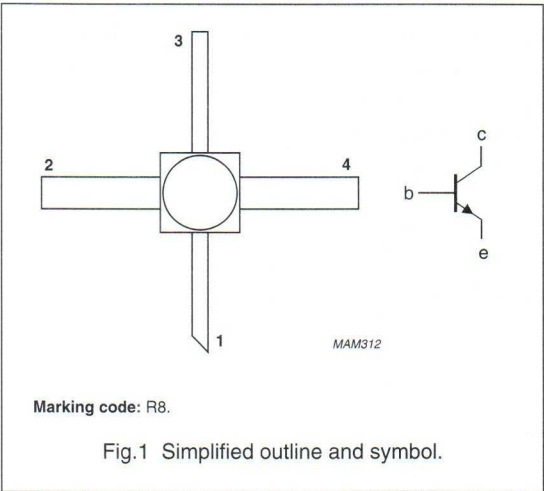

QUICK REFERENCE DATA

RF performance up to $T_{case} = 25\text{ }^{\circ}\text{C}$ in a common emitter class A circuit.

MODE OF OPERATION	f (GHz)	V _{CE} (V)	I _C (mA)	P _{L1} (mW)	G _{po} (dB)	Z _i (Ω)	Z _L (Ω)
CW linear amplifier	4	15	25	>85	>8.5	typ.7 + j22	typ. 10 + j38



NPN microwave power transistor

LAE4001R

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	—	30	V
V_{CER}	collector-emitter voltage	$R_{BE} = 220\ \Omega$	—	25	V
V_{CEO}	collector-emitter voltage	open base	—	16	V
V_{EBO}	emitter-base voltage	open collector	—	2	V
I_C	collector current (DC)		—	80	mA
P_{tot}	total power dissipation	$T_{case} \leq 100\ ^\circ\text{C}$	—	480	mW
T_{stg}	storage temperature		-65	+200	$^\circ\text{C}$
T_j	junction temperature		—	200	$^\circ\text{C}$
T_{sld}	soldering temperature	$t \leq 10\ \text{s}$	—	235	$^\circ\text{C}$

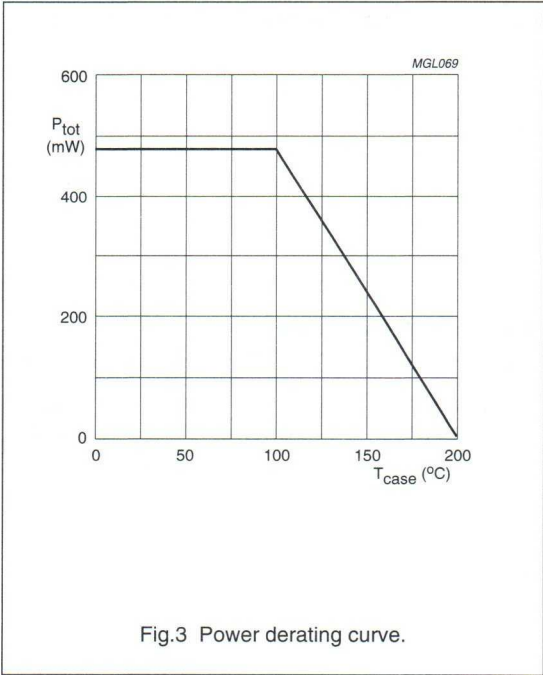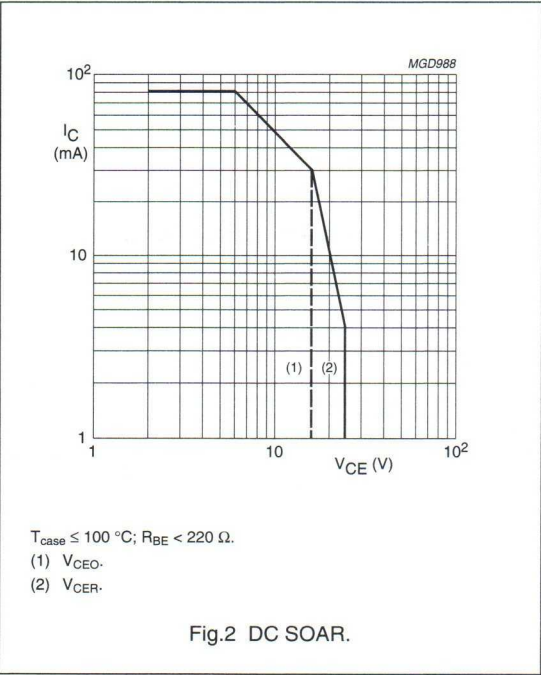

NPN microwave power transistor

LAE4001R

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-c}$	thermal resistance from junction to case	$T_j = 75\ ^\circ\text{C}$	210	K/W

CHARACTERISTICS

 $T_{case} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 15\ \text{V}; I_E = 0$	–	–	100	nA
		$V_{CB} = 30\ \text{V}; I_E = 0$	–	–	100	μA
I_{CER}	collector cut-off current	$V_{CB} = 25\ \text{V}; R_{BE} = 220\ \Omega$	–	–	500	μA
I_{EBO}	emitter cut-off current	$I_C = 0\ \text{V}; V_{EB} = 1.5\ \text{V}$	–	–	35	nA
C_{cb}	collector-base capacitance	$I_E = I_C = 0; V_{CB} = 15\ \text{V}; V_{EB} = 1.5\ \text{V}; f = 1\ \text{MHz}$	–	0.25	–	pF
C_{ce}	collector-base capacitance	$I_E = I_C = 0; V_{CE} = 15\ \text{V}; V_{EB} = 1.5\ \text{V}; f = 1\ \text{MHz}$	–	0.5	–	pF
C_{eb}	collector-base capacitance	$I_E = I_C = 0; V_{EB} = 1.0\ \text{V}; V_{CB} = 15\ \text{V}; f = 1\ \text{MHz}$	–	1.3	–	pF
$ s_{fe} ^2$	forward power gain	$I_C = 25\ \text{mA}; V_{CE} = 15\ \text{V}; f = 2\ \text{GHz}$	–	9.6	–	dB
		$I_C = 25\ \text{mA}; V_{CE} = 15\ \text{V}; f = 4\ \text{GHz}$	–	3.8	–	dB
G_{AM}	maximum available gain	$I_C = 25\ \text{mA}; V_{CE} = 15\ \text{V}; f = 2\ \text{GHz}$	–	16	–	dB
		$I_C = 25\ \text{mA}; V_{CE} = 15\ \text{V}; f = 4\ \text{GHz}$	–	10	–	dB
h_{FE}	DC current gain	$V_{CE} = 5\ \text{V}; I_C = 25\ \text{mA}$	20	–	220	

NPN microwave power transistor

LAE4002S

FEATURES

- Diffused emitter ballasting resistors
- Self-aligned process entirely ion implanted and gold sandwich metallization
- Optimum temperature profile
- Excellent performance and reliability.

APPLICATIONS


Common emitter class A linear power amplifiers up to 4 GHz.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT100 metal ceramic package with emitter connected to the metallized lid. A miniature ceramic encapsulation is used for compatibility with stripline microwave circuits.

PINNING - SOT100

PIN	DESCRIPTION
1	collector
2	emitter
3	base
4	emitter

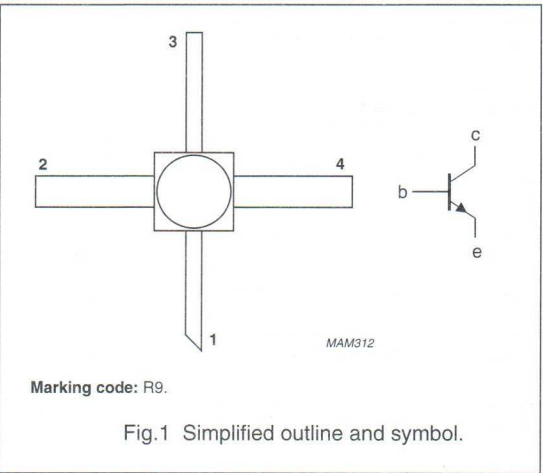

QUICK REFERENCE DATA

RF performance up to $T_{case} = 25\text{ }^{\circ}\text{C}$ in a common emitter class A circuit.

MODE OF OPERATION	f (GHz)	V_{CE} (V)	I_C (mA)	P_{L1} (mW)	G_{po} (dB)	Z_i (Ω)	Z_L (Ω)
CW linear amplifier	4	18	30	>126	>7.5	typ. $4 + j23$	typ. $6.5 + j32$

NPN microwave power transistor

LAE4002S



LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	—	40	V
V_{CER}	collector-emitter voltage	$R_{BE} = 220 \Omega$	—	35	V
V_{CEO}	collector-emitter voltage	open base	—	16	V
V_{EBO}	emitter-base voltage	open collector	—	3	V
I_C	collector current (DC)		—	90	mA
P_{tot}	total power dissipation	$T_{case} \leq 75 \text{ }^\circ\text{C}$	—	625	mW
T_{stg}	storage temperature		-65	+200	$^\circ\text{C}$
T_j	junction temperature		—	200	$^\circ\text{C}$
T_{sld}	soldering temperature	$t \leq 10 \text{ s}$; note 1	—	235	$^\circ\text{C}$

Note

1. Up to 0.1 mm from ceramic.

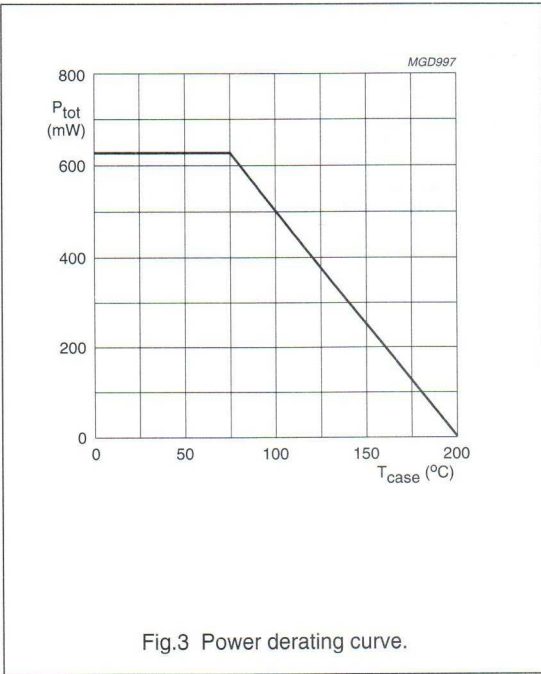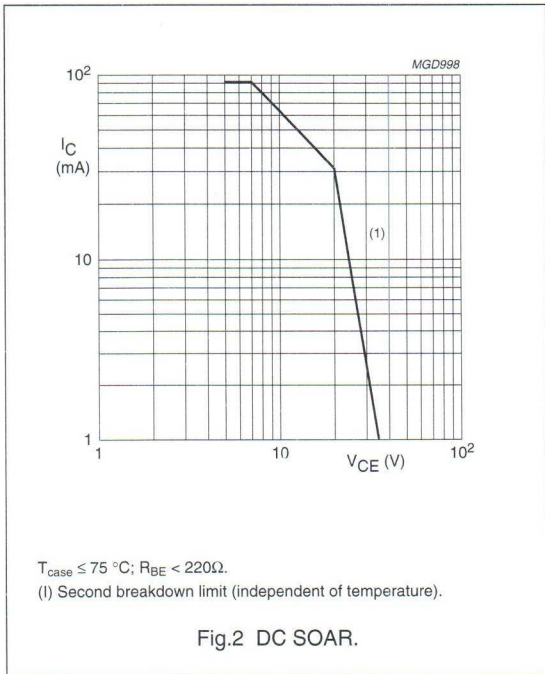

NPN microwave power transistor

LAE4002S

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-c}$	thermal resistance from junction to case	$T_j = 75\ ^\circ\text{C}$	200	K/W

CHARACTERISTICS

 $T_{case} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 20\ \text{V}; I_E = 0$	–	–	100	nA
		$V_{CB} = 40\ \text{V}; I_E = 0$	–	–	150	μA
I_{CER}	collector cut-off current	$V_{CB} = 35\ \text{V}; R_{BE} = 220\ \Omega$	–	–	500	μA
I_{EBO}	emitter cut-off current	$I_C = 0\ \text{V}; V_{EB} = 1.5\ \text{V}$	–	–	50	nA
C_{cb}	collector-base capacitance	$I_E = I_C = 0; V_{CB} = 18\ \text{V}; V_{EB} = 1.5\ \text{V}; f = 1\ \text{MHz}$	–	0.3	–	pF
C_{ce}	collector-base capacitance	$I_E = I_C = 0; V_{CE} = 18\ \text{V}; V_{EB} = 1.5\ \text{V}; f = 1\ \text{MHz}$	–	0.55	–	pF
C_{eb}	collector-base capacitance	$I_E = I_C = 0; V_{EB} = 1.0\ \text{V}; V_{CB} = 18\ \text{V}; f = 1\ \text{MHz}$	–	1.8	–	pF
$ S_{fe} ^2$	forward power gain	$I_C = 30\ \text{mA}; V_{CE} = 18\ \text{V}; f = 2\ \text{GHz}$	–	8.8	–	dB
		$I_C = 30\ \text{mA}; V_{CE} = 18\ \text{V}; f = 4\ \text{GHz}$	–	2.8	–	dB
G_{AM}	maximum available gain	$I_C = 30\ \text{mA}; V_{CE} = 18\ \text{V}; f = 2\ \text{GHz}$	–	14	–	dB
		$I_C = 30\ \text{mA}; V_{CE} = 18\ \text{V}; f = 3\ \text{GHz}$	–	11	–	dB
h_{FE}	DC current gain	$V_{CE} = 5\ \text{V}; I_C = 30\ \text{mA}$	15	–	150	

NPN microwave power transistors

**LBE2003S;
LBE2009S; LCE2009S**

FEATURES

- Diffused emitter ballasting resistors
- Self-aligned process entirely ion implanted and gold metallization
- Optimum temperature profile
- Excellent performance and reliability.

APPLICATIONS



- Common emitter class-A linear power amplifiers up to 4 GHz.

DESCRIPTION

The LBE2003S and LBE2009S are NPN silicon planar epitaxial microwave power transistors in a SOT441A metal ceramic studless package. The LCE2009S is a maintenance type in a SOT442A metal ceramic capstan package.

PINNING

PIN	DESCRIPTION
1	collector
2	emitter
3	base
4	emitter

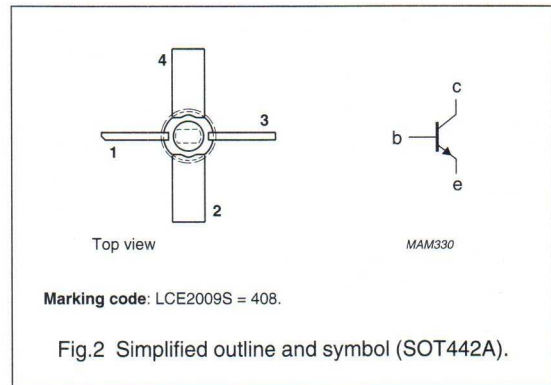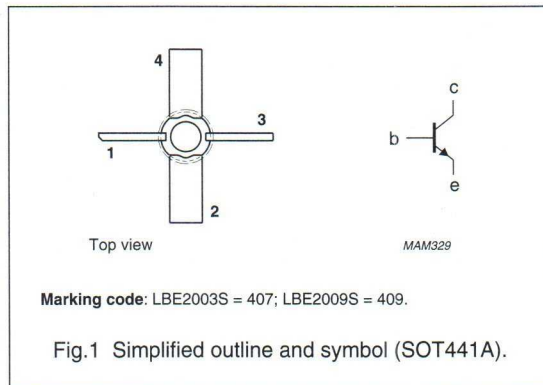

QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common emitter class-A amplifier.

TYPE NUMBER	MODE OF OPERATION	f (GHz)	V_{CE} (V)	I_C (mA)	P_{L1} (mW)	G_{po} (dB)	Z_i (Ω)	Z_L (Ω)
LBE2003S	Class-A (CW) linear	2	18	30	≥ 200	≥ 10	$6.2 + j30$	$17.5 + j7$
LBE2009S	Class-A (CW) linear	2	18	110	≥ 700	≥ 9	$7.5 + j15$	$17.5 + j39$
LCE2009S								

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO disc is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

LCE2009S IS A MAINTENANCE TYPE - NOT RECOMMENDED FOR NEW DESIGNS; SEE INDEX SECTION OF SC15



NPN microwave power transistors

LBE2003S; LBE2009S;
LCE2009S

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).



SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V _{CBO}	collector-base voltage	open emitter		40	V
V _{CER}	collector-emitter voltage				
	LBE2003S	R _{BE} = 220 Ω	–	35	V
	LBE2009S; LCE2009S	R _{BE} = 100 Ω	–	35	V
V _{CEO}	collector-emitter voltage	open base	–	16	V
V _{EBO}	emitter-base voltage	open collector	–	3	V
I _C	collector current (DC)				
	LBE2003S		–	90	mA
	LBE2009S; LCE2009S		–	250	mA
P _{tot}	total power dissipation	T _{mb} ≤ 75 °C			
	LBE2003S		–	1.4	W
	LBE2009S; LCE2009S		–	3.5	W
T _{stg}	storage temperature		–65	+150	°C
T _j	operating junction temperature		–	200	°C
T _{slid}	soldering temperature	at 0.3 mm from case; t = 10 s	–	235	°C

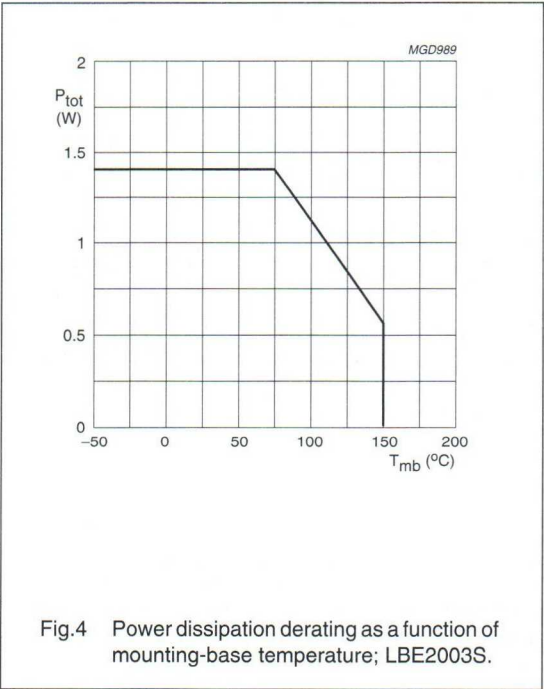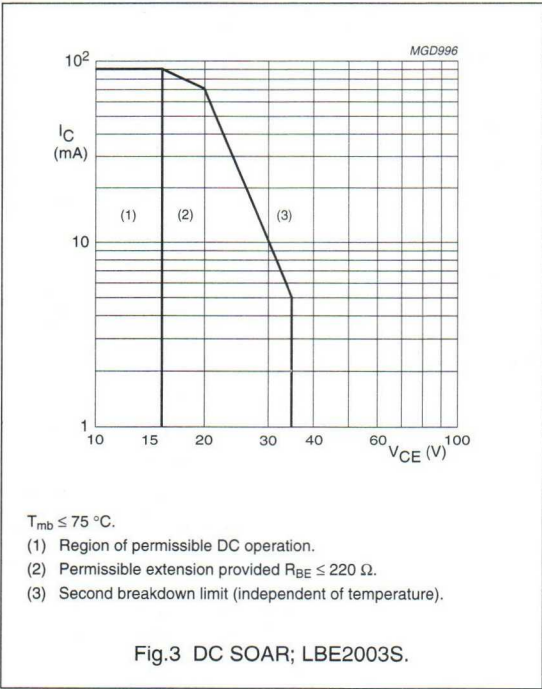

LCE2009S IS A MAINTENANCE TYPE - NOT RECOMMENDED FOR NEW DESIGNS; SEE INDEX SECTION OF SC15

NPN microwave power transistors

LBE2003S; LBE2009S;
LCE2009S

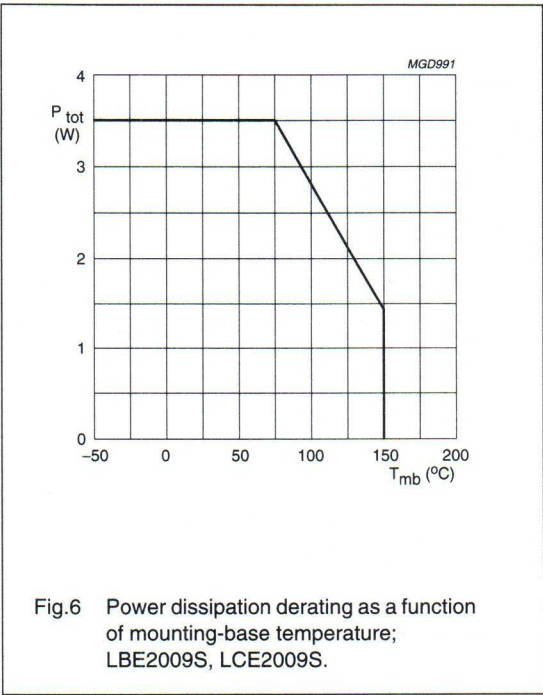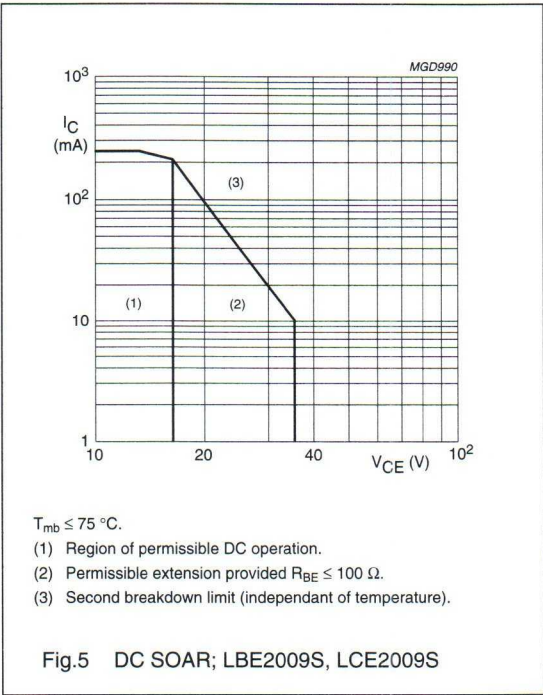

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting-base LBE2003S LBE2009S; LCE2009S	$T_j = 75^\circ\text{C}$; note 1	65 36	K/W K/W
$R_{th\ mb-h}$	thermal resistance from mounting-base to heatsink	$T_j = 75^\circ\text{C}$; note 1	1.5	K/W

Note

1. See "Mounting recommendations in the General part of handbook SC15".

NPN microwave power transistors

LBE2003S; LBE2009S;
LCE2009S

CHARACTERISTICS

 $T_{mb} = 25\text{ }^{\circ}\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 20\text{ V}; I_E = 0$	—	—	0.1	μA
I_{CBO}	collector cut-off current LBE2003S LBE2009S; LCE2009S	$V_{CB} = 40\text{ V}; I_E = 0$	—	—	150	μA
			—	—	250	μA
I_{CER}	collector cut-off current LBE2003S LBE2009S; LCE2009S	$V_{CB} = 35\text{ V}; R_{BE} = 220\text{ }\Omega$	—	—	500	μA
		$V_{CB} = 35\text{ V}; R_{BE} = 100\text{ }\Omega$	—	—	1000	μA
I_{EBO}	emitter cut-off current LBE2003S LBE2009S; LCE2009S	$V_{EB} = 1.5\text{ V}; I_C = 0$	—	—	0.05	μA
			—	—	0.2	μA
h_{FE}	DC current gain	$V_{CE} = 5\text{ V}; I_C = 30\text{ mA}$	15	—	150	
		$V_{CE} = 5\text{ V}; I_C = 110\text{ mA}$	15	—	150	
C_{cb}	collector-base capacitance LBE2003S LBE2009S; LCE2009S	$V_{CB} = 18\text{ V}; V_{EB} = 1.5\text{ V};$ $I_E = I_C = 0; f = 1\text{ MHz}$	—	0.3	—	pF
			—	0.6	—	pF
C_{ce}	collector-emitter capacitance LBE2003S LBE2009S; LCE2009S	$V_{CE} = 18\text{ V}; V_{EB} = 1.5\text{ V};$ $I_E = I_C = 0; f = 1\text{ MHz}$	—	0.45	—	pF
			—	0.6	—	pF
C_{eb}	emitter-base capacitance LBE2003S LBE2009S; LCE2009S	$V_{CB} = 10\text{ V}; V_{EB} = 1\text{ V};$ $I_E = I_C = 0; f = 1\text{ MHz}$	—	1.7	—	pF
			—	3.3	—	pF

LCE2009S IS A MAINTENANCE TYPE - NOT RECOMMENDED FOR NEW DESIGNS; SEE INDEX SECTION OF SC15

NPN microwave power transistors

LBE2003S; LBE2009S;
LCE2009S**Table 1** Scattering parameters LBE2003S: $V_{CE} = 18\text{ V}$; $I_C = 30\text{ mA}$ (V_{CE} and I_C regulated); $T_{mb} = 25\text{ °C}$; $Z_0 = 50\text{ }\Omega$; typical values. (The figures given between brackets are values in dB).

f (MHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAGNITUDE (ratio)	ANGLE (deg)	MAGNITUDE (ratio)	ANGLE (deg)	MAGNITUDE (ratio)	ANGLE (deg)	MAGNITUDE (ratio)	ANGLE (deg)
500	0.56	-143	0.037 (-28.6)	41	9.50 (19.6)	101	0.56	-34
600	0.55	-154	0.040 (-28.0)	39	8.28 (18.4)	93	0.51	-35
700	0.55	-164	0.040 (-27.9)	40	7.13 (17.1)	88	0.50	-36
800	0.55	-171	0.041 (-27.7)	40	6.35 (16.1)	82	0.49	-37
900	0.55	-178	0.043 (-27.4)	41	5.69 (15.1)	77	0.47	-38
1000	0.55	176	0.045 (-26.9)	40	5.14 (14.2)	72	0.46	-39
1100	0.55	170	0.048 (-26.4)	40	4.72 (13.5)	68	0.46	-39
1200	0.55	165	0.051 (-25.9)	41	4.37 (12.8)	64	0.45	-41
1300	0.56	159	0.056 (-25.1)	41	4.05 (12.2)	60	0.44	-44
1400	0.55	158	0.060 (-24.5)	41	3.76 (11.5)	57	0.45	-46
1500	0.55	149	0.062 (-24.2)	40	3.52 (10.9)	53	0.43	-48
1600	0.55	146	0.065 (-23.8)	42	3.33 (10.5)	50	0.43	-50
1700	0.56	142	0.068 (-23.3)	42	3.15 (10.0)	46	0.43	-53
1800	0.57	137	0.070 (-23.1)	41	2.96 (9.4)	42	0.43	-54
1900	0.57	132	0.072 (-22.9)	40	2.80 (8.9)	39	0.43	-56
2000	0.58	128	0.074 (-22.7)	40	2.66 (8.5)	36	0.42	-57
2200	0.60	121	0.081 (-21.8)	39	2.43 (7.7)	28	0.41	-61
2400	0.62	114	0.091 (-20.8)	37	2.24 (7.0)	23	0.40	-67
2600	0.64	108	0.099 (-20.1)	36	2.08 (6.4)	16	0.39	-75
2800	0.66	102	0.105 (-19.6)	33	1.90 (5.6)	10	0.38	-82
3000	0.68	96	0.108 (-19.4)	31	1.79 (5.1)	4	0.39	-87
3200	0.71	92	0.124 (-18.7)	29	1.63 (4.3)	-2	0.37	-94
3400	0.73	89	0.125 (-18.0)	27	1.58 (4.0)	-7	0.40	-101
3600	0.75	86	0.137 (-17.3)	25	1.46 (3.3)	-13	0.39	-112
3800	0.76	82	0.142 (-17.0)	23	1.40 (2.9)	-18	0.38	-120
4000	0.77	79	0.149 (-16.6)	20	1.31 (2.3)	-24	0.38	-128
4200	0.78	75	0.155 (-16.2)	17	1.25 (1.9)	-28	0.38	-133
4400	0.80	73	0.167 (-15.5)	15	1.20 (1.6)	-34	0.39	-142
4600	0.81	69	0.177 (-15.0)	12	1.14 (1.1)	-38	0.39	-151
4800	0.81	68	0.187 (-14.6)	10	1.10 (0.8)	-43	0.42	-159
5000	0.81	65	0.194 (-14.3)	6	1.04 (0.4)	-47	0.44	-165
5200	0.80	60	0.203 (-13.8)	4	1.03 (0.3)	-53	0.47	-169
5400	0.81	56	0.219 (-13.2)	-1	0.98 (-0.2)	-57	0.48	-175
5600	0.81	51	0.229 (-12.8)	-3	0.97 (-0.3)	-62	0.49	-178
5800	0.81	48	0.243 (-12.3)	-8	0.92 (-0.7)	-68	0.51	-171
6000	0.80	44	0.245 (-12.2)	-12	0.90 (-0.9)	-72	0.55	-165

NPN microwave power transistors

LBE2003S; LBE2009S;
LCE2009S**Table 2** Scattering parameters LBE2009S; LCE2009S: $V_{CE} = 18\text{ V}$; $I_C = 110\text{ mA}$ (V_{CE} and I_C regulated); $T_{mb} = 25\text{ °C}$; $Z_0 = 50\text{ }\Omega$; typical values. (The figures given between brackets are values in dB).

f (MHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAGNITUDE (ratio)	ANGLE (deg)	MAGNITUDE (ratio)	ANGLE (deg)	MAGNITUDE (ratio)	ANGLE (deg)	MAGNITUDE (ratio)	ANGLE (deg)
500	0.70	177	0.029 (−30.7)	50	7.55 (17.6)	83	0.25	−48
600	0.70	171	0.033 (−29.6)	51	6.43 (16.2)	77	0.22	−50
700	0.70	168	0.036 (−29.0)	53	5.46 (14.6)	73	0.23	−52
800	0.70	163	0.039 (−28.4)	54	4.80 (13.6)	68	0.22	−54
900	0.71	159	0.041 (−27.8)	54	4.27 (12.6)	64	0.22	−56
1000	0.71	155	0.045 (−27.0)	55	3.84 (11.7)	60	0.21	−59
1100	0.71	151	0.049 (−26.2)	54	3.53 (11.0)	56	0.21	−62
1200	0.71	148	0.054 (−25.4)	54	3.27 (10.3)	52	0.21	−65
1300	0.71	144	0.060 (−24.5)	53	3.01 (9.6)	48	0.20	−74
1400	0.72	143	0.066 (−23.6)	54	2.80 (9.0)	45	0.20	−79
1500	0.72	136	0.070 (−23.1)	52	2.61 (8.3)	41	0.21	−80
1600	0.72	133	0.075 (−22.5)	53	2.47 (7.9)	38	0.21	−83
1700	0.72	130	0.080 (−21.9)	51	2.33 (7.3)	34	0.22	−87
1800	0.73	127	0.084 (−21.5)	49	2.18 (6.8)	30	0.22	−90
1900	0.73	123	0.087 (−21.2)	48	2.05 (6.3)	26	0.22	−94
2000	0.74	120	0.090 (−20.9)	46	1.97 (5.9)	23	0.22	−97
2200	0.75	114	0.100 (−20.0)	43	1.78 (5.0)	15	0.22	−109
2400	0.77	108	0.112 (−19.0)	40	1.63 (4.3)	10	0.21	−122
2600	0.79	103	0.123 (−18.2)	37	1.51 (3.6)	2	0.24	−133
2800	0.80	97	0.129 (−17.8)	33	1.36 (2.7)	−4	0.25	−143
3000	0.81	92	0.134 (−17.5)	30	1.28 (2.1)	−11	0.27	−151
3200	0.83	88	0.143 (−16.9)	26	1.15 (1.2)	−17	0.28	−163
3400	0.85	85	0.152 (−16.4)	24	1.10 (0.9)	−21	0.30	−173
3600	0.86	82	0.163 (−15.8)	20	1.00 (0)	−28	0.34	178
3800	0.87	79	0.168 (−15.5)	17	0.96 (−0.4)	−32	0.37	173
4000	0.88	75	0.175 (−15.2)	14	0.88 (−1.1)	−39	0.41	168
4200	0.88	71	0.180 (−14.9)	11	0.83 (−1.6)	−42	0.42	162
4400	0.89	69	0.193 (−14.3)	8	0.79 (−2.1)	−48	0.45	155
4600	0.90	66	0.200 (−14.0)	5	0.74 (−2.6)	−51	0.48	149
4800	0.90	64	0.211 (−13.5)	2	0.71 (−3.0)	−56	0.52	145
5000	0.90	61	0.214 (−13.4)	−2	0.66 (−3.6)	−59	0.55	144

LCE2009S IS A MAINTENANCE TYPE - NOT RECOMMENDED FOR NEW DESIGNS; SEE INDEX SECTION OF SC15

NPN microwave power transistors

LBE2003S; LBE2009S;
LCE2009S


APPLICATION INFORMATION

Microwave performance for LBE2003S up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common emitter class-A test circuit; note 1.

MODE OF OPERATION	f (GHz)	V _{CE} (V) ⁽²⁾	I _C (mA) ⁽²⁾	P _{L1} (mW) ⁽³⁾	G _{po} (dB) ⁽⁴⁾	Z _i (Ω)	Z _L (Ω)
Class-A (CW)	2	18	30	≥200 (23) typ. 250 (24)	≥10 typ. 11	6.2 + j30	17.5 + j7

Notes

1. Circuit consists of prematching circuit boards in combination with complementary input and output slug tuners.
2. I_C and V_{CE} regulated.
3. Load power for 1 dB compressed power gain.
4. Low level power gain associated with P_{L1} .

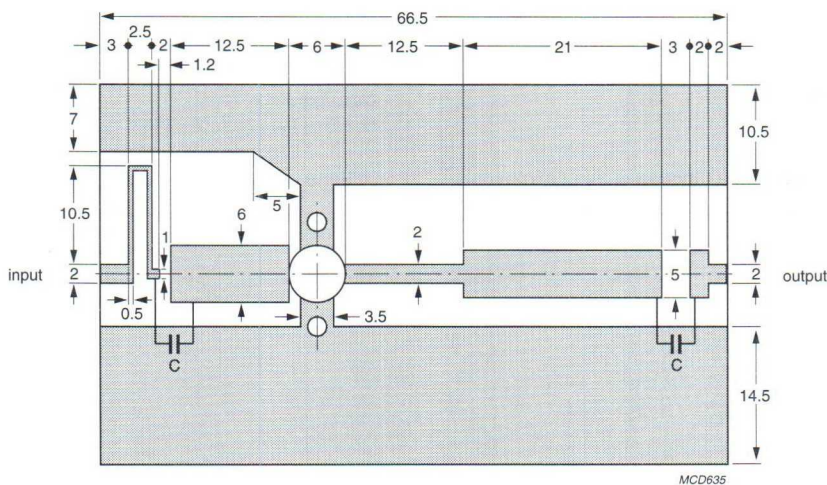

Dimensions in mm.


Striplines on a double copper-clad printed-circuit board with PTFE fibreglass dielectric ($\epsilon_r = 2.54$); thickness: 0.8 mm.

Fig.7 Prematching test circuit board for 2 GHz.

LCE2009S IS A MAINTENANCE TYPE - NOT RECOMMENDED FOR NEW DESIGNS; SEE INDEX SECTION OF SC15


NPN microwave power transistors

LBE2003S; LBE2009S;
LCE2009S

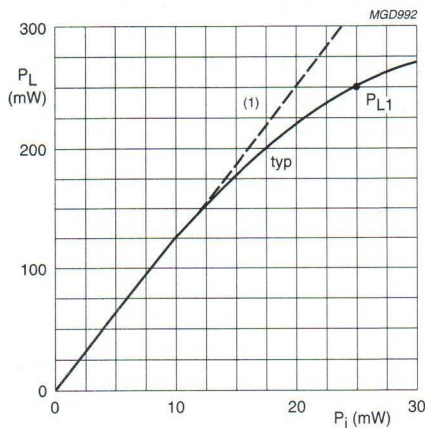

$f = 2 \text{ GHz}$; $T_{mb} = 25 \text{ }^\circ\text{C}$.
 $V_{CE} = 18 \text{ V}$; $I_C = 30 \text{ mA}$.
(1) $G_{p0} = 11 \text{ dB}$.

Fig.8 Load power as a function of input power.

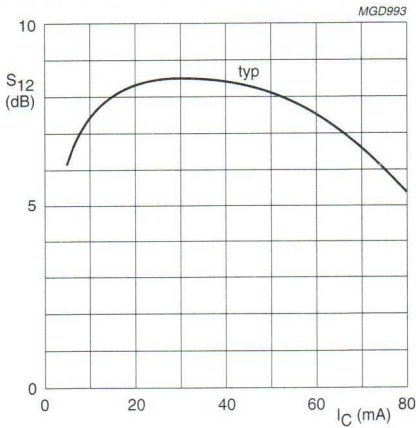

Class-A operation.
 $f = 2 \text{ GHz}$; $T_{mb} = 25 \text{ }^\circ\text{C}$; $V_{CE} = 18 \text{ V}$.

Fig.9 s_{12} as a function of collector current.

LCE2009S IS A MAINTENANCE TYPE - NOT RECOMMENDED FOR NEW DESIGNS; SEE INDEX SECTION OF SC15

NPN microwave power transistors


LBE2003S; LBE2009S;
LCE2009S

Microwave performance for LBE2009S; LCE2009S up to $T_{mb} = 75\text{ }^{\circ}\text{C}$ in a common emitter class-A test circuit; note 1.

MODE OF OPERATION	f (GHz)	V _{CE} (V) ⁽²⁾	I _C (mA) ⁽²⁾	P _{L1} (mW) ⁽³⁾	G _{po} (dB) ⁽⁴⁾	Z _i (Ω)	Z _L (Ω)
Class-A (CW)	2	18	110	≥700 (28.5) typ. 900 (29.5)	≥9 typ. 9.8	7.5 + j14.5	17.5 + j38.5

Notes

1. Circuit consists of prematching circuit boards in combination with complementary input and output slug tuners.
2. I_C and V_{CE} regulated.
3. Load power for 1 dB compressed power gain.
4. Low level power gain associated with P_{L1}.

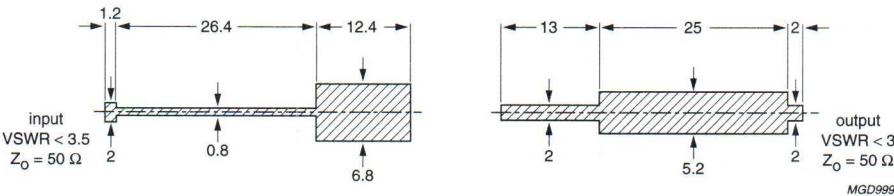


Dimensions in mm.
Striplines on a double copper-clad printed-circuit board with PTFE fibreglass dielectric ($\epsilon_r = 2.54$); thickness: 0.8 mm.

Fig.10 Prematching test circuit board for 2 GHz.


NPN microwave power transistors

LBE2003S; LBE2009S;
LCE2009S

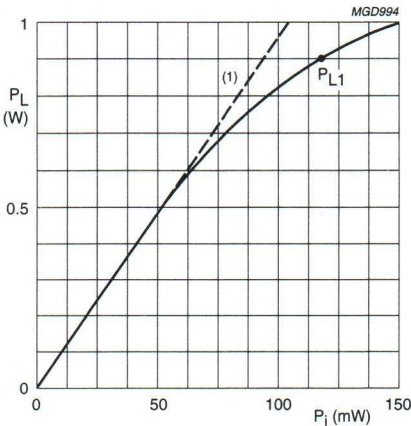

$f = 2 \text{ GHz}$; $T_{mb} = 25^\circ\text{C}$.
 $V_{CE} = 18 \text{ V}$; $I_C = 110 \text{ mA}$.
(1) $G_{po} = 9.8 \text{ dB}$.

Fig.11 Load power as a function of input power.

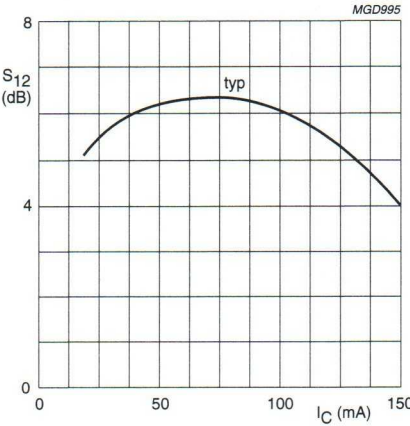

Class-A operation.
 $f = 2 \text{ GHz}$; $T_{mb} = 25^\circ\text{C}$; $V_{CE} = 18 \text{ V}$.

Fig.12 s_{12} as a function of collector current.

LCE2009S IS A MAINTENANCE TYPE - NOT RECOMMENDED FOR NEW DESIGNS; SEE INDEX SECTION OF SC15

NPN microwave power transistor

LEE1015T

FEATURES

- Diffused emitter ballasting resistors providing excellent current sharing and withstanding a high VSWR
- Interdigitated structure provides high emitter efficiency
- Gold metallization realizes very good stability of the characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance.

APPLICATIONS


Intended for use in common emitter, class A power amplifiers for applications that require a high level of linearity.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT122A metal ceramic package.

PINNING - SOT122A

PIN	DESCRIPTION
1	collector
2	emitter
3	base
4	emitter

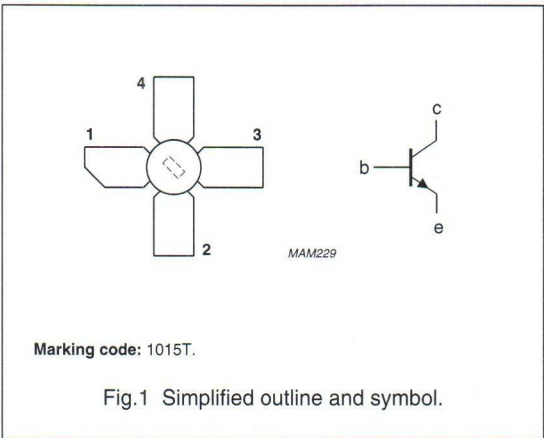

QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common base class A narrowband amplifier (guaranteed values).

MODE OF OPERATION	f (MHz)	V_{CE} (V)	I_C (mA)	P_{L1} (W)	G_{po} (dB)	d_{im} (dB)
Class A (CW)	860	20	140	>1	>13	<-57 note 1

Note

1. The stated intermodulation distortion level is referred to the total output power of 18.25 dBm, which corresponds to the sum of the power carried by each of the two equal amplitude tones at $f_1 = 859\text{ MHz}$ and $f_2 = 861\text{ MHz}$.

WARNING
Product and environmental safety - toxic materials
This product contains beryllium oxide. The product is entirely safe provided that the BeO disc is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

NPN microwave power transistor

LEE1015T



LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	—	40	V
V_{CER}	collector-emitter voltage	$R_{BE} = 10\ \Omega$	—	40	V
V_{CEO}	collector-emitter voltage	open base	—	22	V
V_{EBO}	emitter-base voltage	open collector	—	3	V
I_C	collector current		—	500	mA
P_{tot}	total power dissipation	$T_{mb} = 75\ ^\circ\text{C}$	—	7.5	W
T_{stg}	storage temperature		−65	+150	$^\circ\text{C}$
T_j	junction temperature		—	200	$^\circ\text{C}$
T_{sld}	soldering temperature	$t \leq 10\ \text{s}$; note 1	—	235	$^\circ\text{C}$

Note

1. Up to 0.2 mm from ceramic.

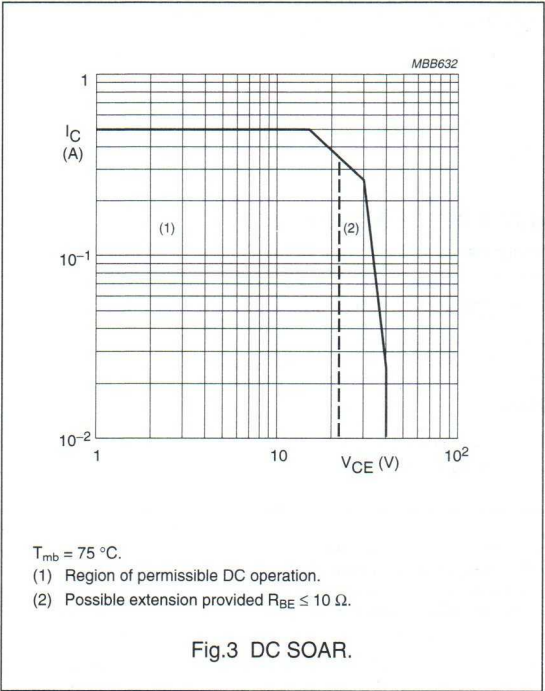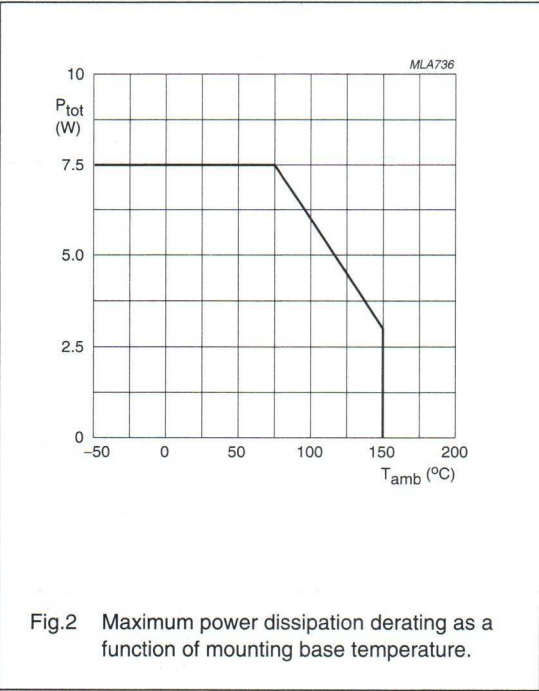

NPN microwave power transistor

LEE1015T

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	$T_j = 75\ ^\circ\text{C}$	12	K/W
$R_{th\ mb-h}$	thermal resistance from mounting base to heatsink	note 1	0.6	K/W

Note

1. See "Mounting recommendations in the General part of handbook SC15".

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 40\ \text{V}; I_E = 0$	400	μA
I_{CER}	collector cut-off current	$V_{CE} = 40\ \text{V}; R_{BE} = 10\ \Omega$	20	mA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\ \text{V}; I_C = 0$	400	μA

APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ in the test circuit.

MODE OF OPERATION	f (MHz)	V_{CE} (V)	I_C (mA)	P_{L1} (W)	G_{po} (dB)
Class A	860	20	140	>1; typ. 1.3	>13; typ. 14.5

NPN microwave power transistor

LFE15600X

FEATURES

- Diffused emitter ballasting resistors providing excellent current sharing and withstanding a high VSWR
- Interdigitated structure provides high emitter efficiency
- Gold metallization realizes very good stability of the characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance
- Internal input and output prematching ensures good stability and allows an easier design of wideband circuits.

APPLICATIONS

Common emitter, class AB amplifiers in CW conditions for professional applications between 1.5 GHz and 1.7 GHz.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT448A glued cap metal ceramic flange package, with emitter connected to flange.

QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common emitter class AB amplifier.

MODE OF OPERATION	f (GHz)	V_{CE} (V)	I_{CQ} (A)	P_{L1} (W)	G_{po} (dB)	η_C (%)	Z_i/Z_L (Ω)
Class AB (CW)	1.5	24	0.2	≥ 55	≥ 8	typ.50	see Figs 7 and 8

PINNING - SOT448A

PIN	DESCRIPTION
1	collector
2	base
3	emitter connected to flange

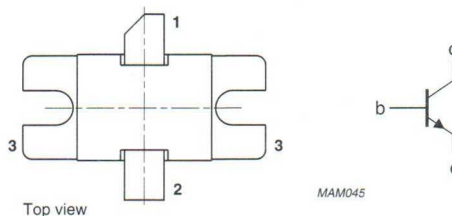


Fig.1 Simplified outline and symbol.

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

NPN microwave power transistor

LFE15600X

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	–	45	V
V_{CER}	collector-emitter voltage	$R_{BE} = 56\ \Omega$	–	30	V
V_{CEO}	collector-emitter voltage	open base	–	22	V
V_{EBO}	emitter-base voltage	open collector	–	3	V
I_C	DC collector current		–	12	A
P_i	input power	$f = 1.5\text{ GHz}$; $V_{CE} = 24\text{ V}$; class AB	–	20	W
P_{tot}	total power dissipation	$T_{mb} = 75\text{ }^\circ\text{C}$	–	80	W
T_{stg}	storage temperature		–65	+200	$^\circ\text{C}$
T_j	junction temperature		–	200	$^\circ\text{C}$
T_{sld}	soldering temperature	$t \leq 10\text{ s}$; note 1	–	235	$^\circ\text{C}$

Note

- 1. Up to 0.2 mm from ceramic.

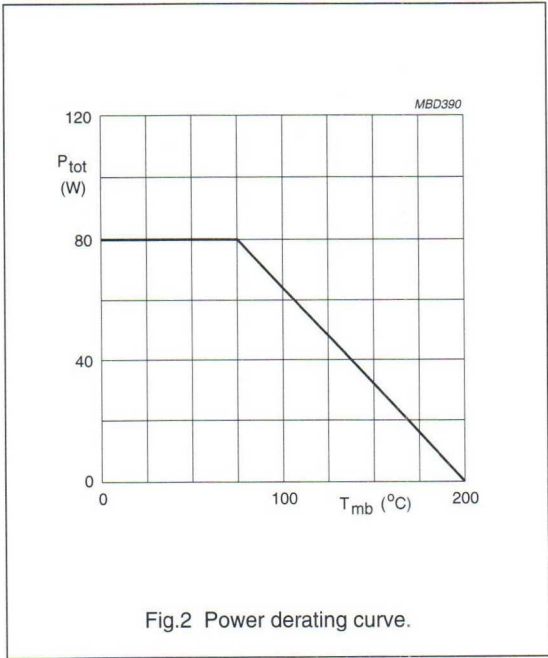


Fig.2 Power derating curve.

NPN microwave power transistor

LFE15600X

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	$T_j = 100\ ^\circ\text{C}$	1.2	K/W
$R_{th\ mb-h}$	thermal resistance from mounting base to heatsink	note 1	0.2	K/W

Note

1. See "Mounting recommendations in the General part of handbook SC15".

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
I_{CBO}	collector cut-off current	$I_E = 0$; $V_{CB} = 20\ \text{V}$	—	6	mA
$V_{(BR)CER}$	collector-emitter breakdown voltage	$I_C = 30\ \text{mA}$; $R_{BE} = 56\ \Omega$	30	—	V
$V_{(BR)CBO}$	collector-base breakdown voltage	$I_C = 30\ \text{mA}$	45	—	V
$V_{(BR)EBO}$	emitter-base breakdown voltage	$I_E = 30\ \text{mA}$	3	—	V
h_{FE}	DC current gain	$I_C = 1\ \text{A}$; $V_{CE} = 5\ \text{V}$	15	100	



APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ in a common emitter class AB amplifier.

MODE OF OPERATION	f (GHz)	V_{CE} (V)	I_{CQ} (A)	P_{L1} (W)	G_{po} (dB)	η_c (%)	Z/Z_L (Ω)
Class AB (CW)	1.5	24	0.2	≥ 55 typ. 60	≥ 8 typ. 8.5	typ. 50	see Figs 7 and 8

NPN microwave power transistor

LFE15600X

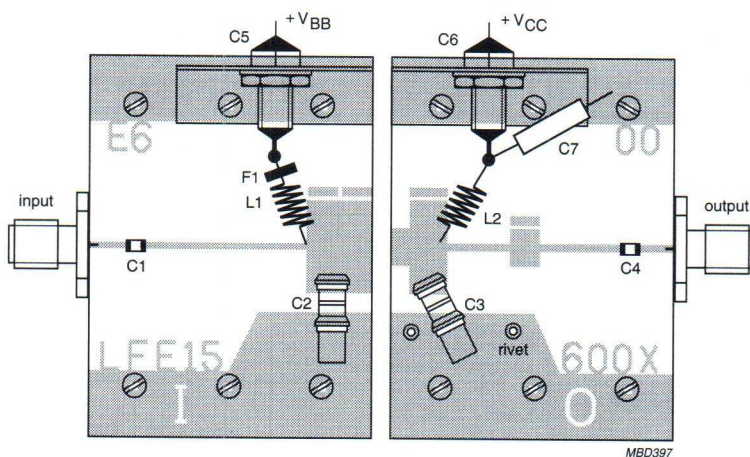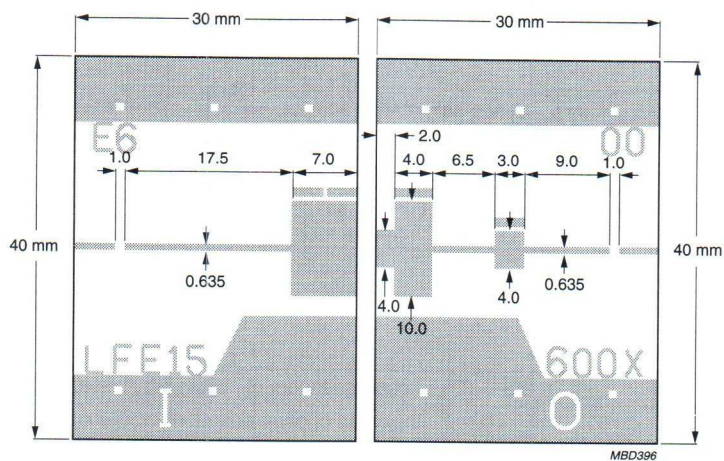

The test circuit is split into 2 independent halves, each being 30 × 40 mm in size.

Dimensions in mm.

Substrate: Epsilam 10.


Thickness: 0.635 mm.

Permittivity: $\epsilon_r = 10$.

Fig.3 Prematching test circuit board.

NPN microwave power transistor

LFE15600X

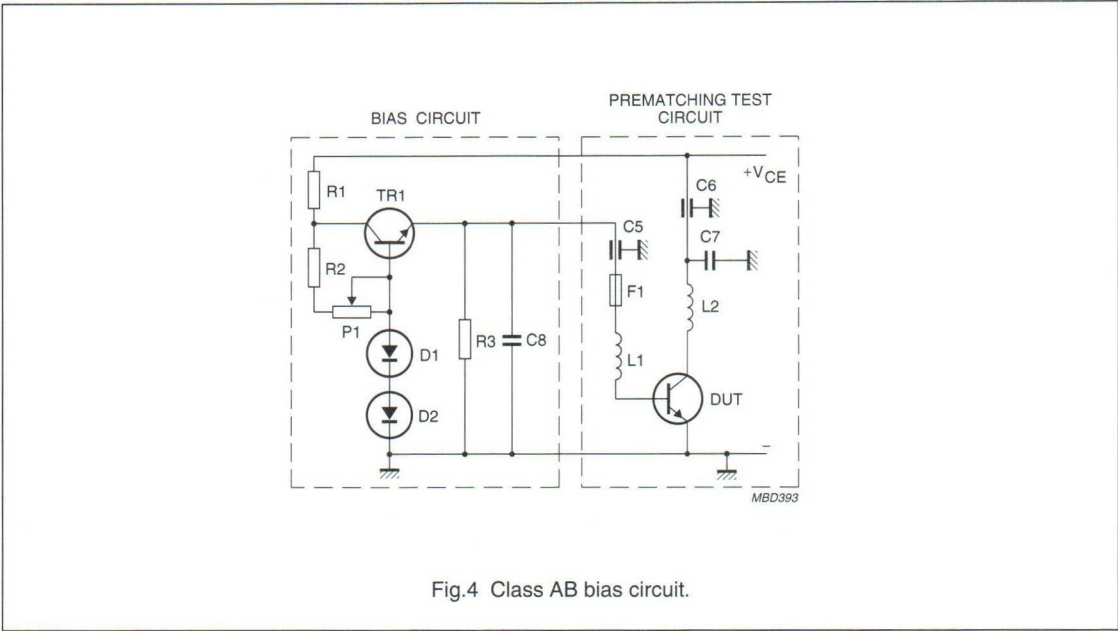

List of components (see Figs 3 and 4)


COMPONENT	DESCRIPTION	VALUE	TYPE NUMBERS
TR1	transistor		BDT91 or equivalent
C1, C4	DC blocking chip capacitor	100 pF	ATC 100A101kp
C2, C3	trimmer capacitor	0.5 to 5.0 pF	Tekelec 727-1
C5, C6	feedthrough bypass capacitor	1500 pF	Erie, ref. 1250-003
C7, C8	tantalum capacitor	10 μ F, 50 V	
D1	diode BY239 or equivalent; note 1		
D2	diode BY239 or equivalent; note 2		
L1	4 turns 0.5 mm copper wire; internal diameter = 2 mm		
L2	3 turns 0.5 mm copper wire; internal diameter = 2 mm		
P1	linear potentiometer	4.7 k Ω	
R1	resistor	100 Ω , 0.25 W	
R2	resistor	10 k Ω , 0.25 W	
R3	resistor	50 Ω , 0.25 W	
F1	ferrite bead		Philips tube 3.7 $\times$ 1.2 $\times$ 3.5 mm (3B)

Notes

- 1. In thermal contact with TR1.
- 2. In thermal contact with DUT.


NPN microwave power transistor

LFE15600X

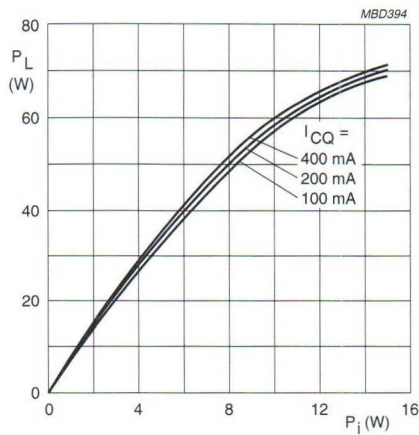

$V_{CE} = 24 \text{ V}$; $f = 1500 \text{ MHz}$.

Fig.5 Load power as a function of input power.

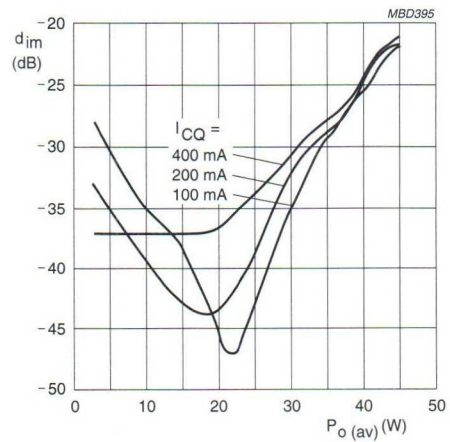

$V_{CE} = 24 \text{ V}$; $f_1 = 1500 \text{ MHz}$; $f_2 = 1500.2 \text{ MHz}$.

Fig.6 Intermodulation distortion as a function of average output power.


Input and optimum load impedances

$V_{CE} = 24 \text{ V}$; $I_{CQ} = 0.2 \text{ A}$.

f (GHz)	Z_i (Ω)	Z_L (Ω)
1.50	$2.4 + j3.4$	$2.4 - j1.8$
1.55	$3.0 + j3.6$	$2.3 - j1.7$
1.60	$3.5 + j3.8$	$2.2 - j1.6$
1.65	$4.2 + j3.8$	$2.1 - j1.5$
1.70	$4.8 + j2.5$	$1.8 - j1.5$


NPN microwave power transistor

LFE15600X

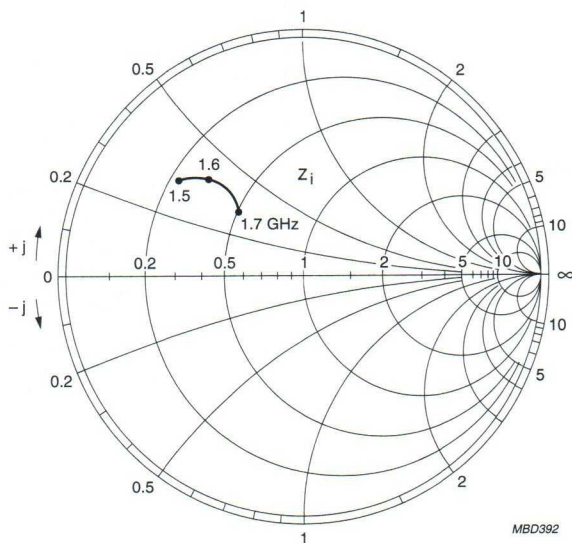

$V_{CE} = 24 \text{ V}$; $Z_o = 10 \Omega$; $I_{CQ} = 0.2 \text{ A}$.

Fig.7 Input impedance as a function of frequency; typical values.

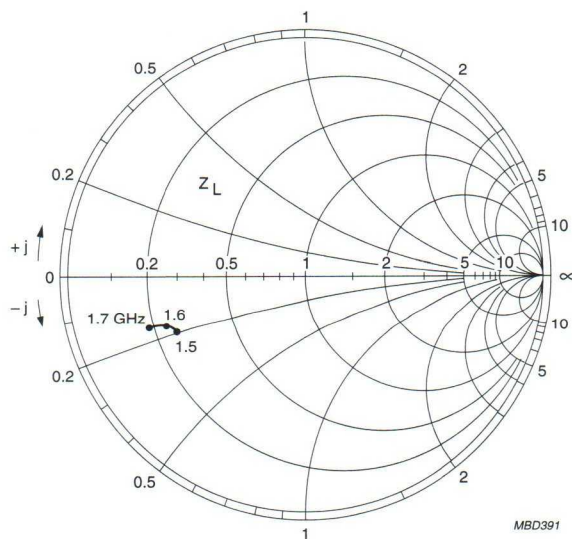

$V_{CE} = 24 \text{ V}$; $Z_o = 10 \Omega$; $I_{CQ} = 0.2 \text{ A}$.

Fig.8 Optimum load impedance as a function of frequency; typical values.

NPN microwave power transistor

LLE15180X

FEATURES

- Diffused emitter ballasting resistors providing excellent current sharing and withstanding a high VSWR
- Interdigitated structure provides high emitter efficiency
- Gold metallization realizes very good stability of the characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance
- Internal input and output prematching ensures good stability and allows an easier design of wideband circuits.

APPLICATIONS

Intended for use in common emitter, class AB amplifiers in CW conditions for professional applications between 1.4 GHz and 1.6 GHz.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT437A glued cap metal ceramic flange package, with emitter connected to flange.

QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25^\circ\text{C}$ in a common emitter class AB amplifier.

MODE OF OPERATION	f (GHz)	V_{CE} (V)	I_{CQ} (A)	P_{L1} (W)	G_{po} (dB)	η_c (%)	$Z_i; Z_L$ (Ω)
Class AB (CW)	1.5	24	0.05	≥ 15	≥ 7.8	typ. 50	see Figs 6 and 7

PINNING - SOT437A

PIN	DESCRIPTION
1	collector
2	base
3	emitter connected to flange

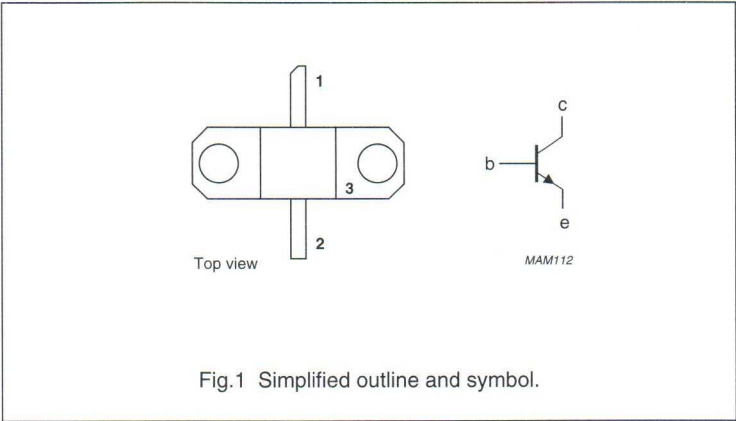


Fig.1 Simplified outline and symbol.

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

NPN microwave power transistor

LLE15180X


LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	–	45	V
V_{CER}	collector-emitter voltage	$R_{BE} = 220\ \Omega$	–	30	V
V_{CEO}	collector-emitter voltage	open base	–	22	V
V_{EBO}	emitter-base voltage	open collector	–	3	V
I_C	DC collector current		–	3	A
P_i	input power	$f = 1.85\text{ GHz}$; $V_{CE} = 24\text{ V}$; class AB	–	4	W
P_{tot}	total power dissipation	$T_{mb} = 75\text{ }^\circ\text{C}$	–	25	W
T_{stg}	storage temperature		–65	+150	$^\circ\text{C}$
T_j	junction temperature		–	200	$^\circ\text{C}$
T_{sld}	soldering temperature	$t \leq 10\text{ s}$; note 1	–	235	$^\circ\text{C}$

Note

- 1. Up to 0.2 mm from ceramic.

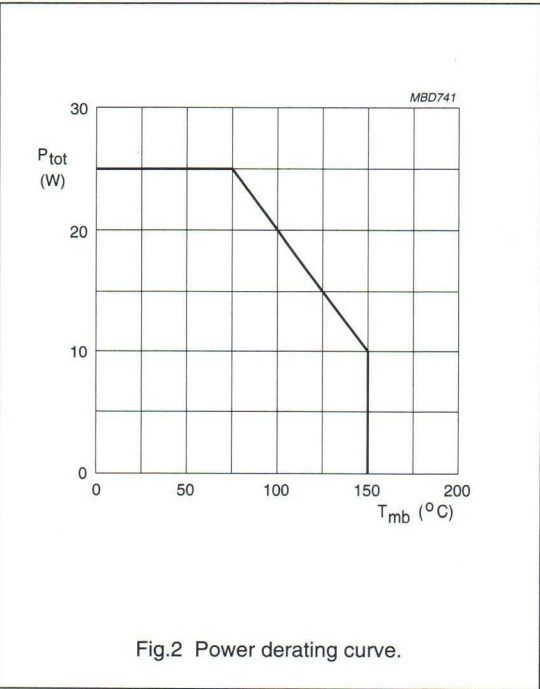

NPN microwave power transistor

LLE15180X

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	$T_j = 100\ ^\circ\text{C}$	3.6	K/W
$R_{th\ mb-h}$	thermal resistance from mounting base to heatsink	note 1	0.2	K/W

Note

1. See "Mounting recommendations in the General part of handbook SC15".

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
I_{CBO}	collector cut-off current	$I_E = 0$; $V_{CB} = 20\ \text{V}$	–	1.5	mA
$V_{(BR)CER}$	collector-emitter breakdown voltage	$I_C = 10\ \text{mA}$; $R_{BE} = 220\ \Omega$	30	–	V
$V_{(BR)CBO}$	collector-base breakdown voltage	$I_C = 10\ \text{mA}$	45	–	V
$V_{(BR)EBO}$	emitter-base breakdown voltage	$I_E = 10\ \text{mA}$	3	–	V
h_{FE}	DC current gain	$I_C = 0.5\ \text{A}$; $V_{CE} = 3\ \text{V}$	15	100	


APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ in a common emitter class AB amplifier.

MODE OF OPERATION	f (GHz)	V_{CE} (V)	I_{CQ} (A)	P_{L1} (W)	G_{po} (dB)	η_c (%)	Z_i ; Z_L (Ω)
Class AB (CW)	1.5	24	0.05	≥ 15 typ. 18	≥ 7.8 typ. 8.2	typ. 50	see Figs 6 and 7

NPN microwave power transistor

LLE15180X

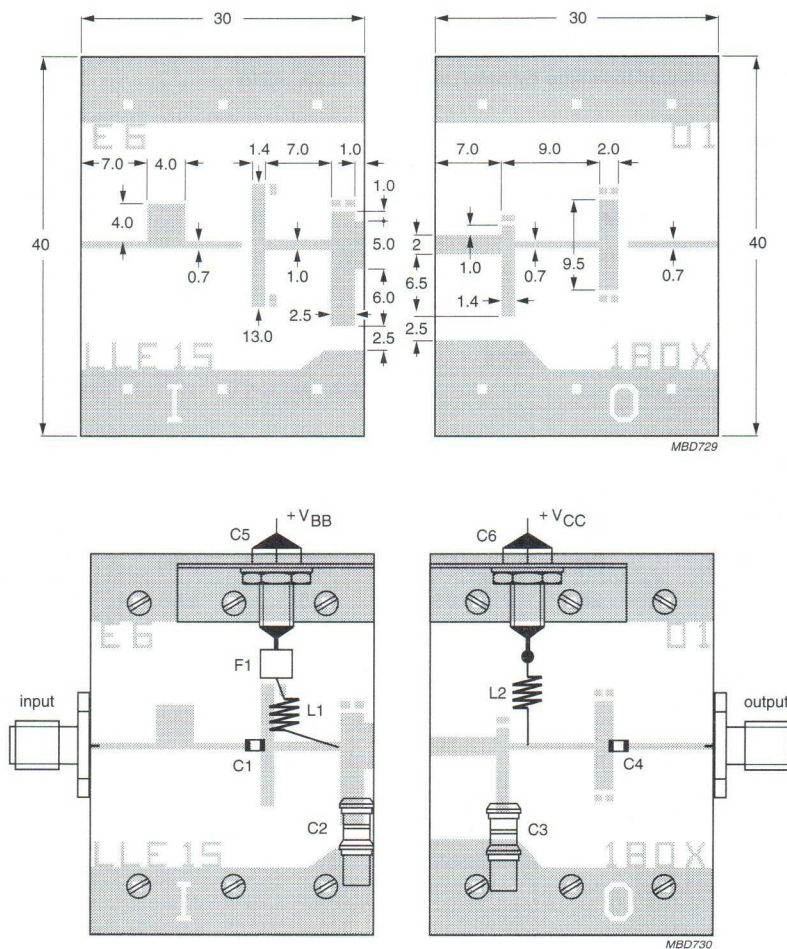

The test circuit is split into two independent halves, each being 30 × 40 mm in size.

Dimensions in mm.

Substrate: Epsilam 10.

Thickness: 0.635 mm.

Permittivity: $\epsilon_r = 10$.

Fig.3 Prematching test circuit board.

NPN microwave power transistor

LLE15180X

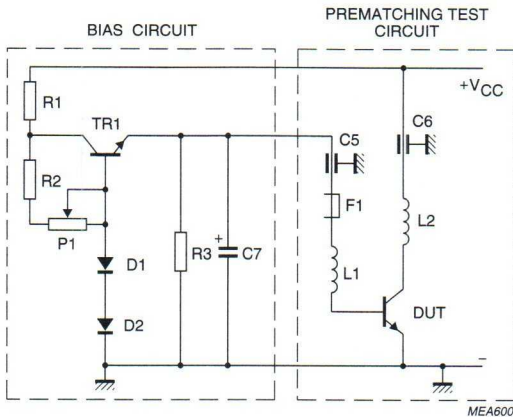


Fig.4 Class AB bias circuit.

List of components (see Figs 3 and 4)


COMPONENT	DESCRIPTION	VALUE	ORDERING INFORMATION
TR1	transistor, BDT91 or equivalent		
C1, C4	DC blocking chip capacitor	100 pF	ATC 100A101kp
C2, C3	trimmer capacitor	0.5 to 5.0 pF	Tekelec 727-1
C5, C6	feedthrough bypass capacitor	1500 pF	Erie1250-003
C7	electrolytic capacitor	10 μ F, >30 V	
D1	diode BY239 or equivalent; note 1		
D2	diode BY239 or equivalent; note 2		
L1	4 turns 0.5 mm copper wire; internal diameter = 2 mm		
L2	4 turns 0.5 mm copper wire; internal diameter = 2 mm		
P1	linear potentiometer	4.7 k Ω	
R1	resistor	100 Ω , 0.25 W	
R2	resistor	10 k Ω , 0.25 W	
R3	resistor	56 Ω , 0.25 W	
F1	ferrite bead		Philips tube, 12NC = 4330 030 43081 4.2 $\times$ 2.2 $\times$ 3.2 mm (4B1)

Notes

1. In thermal contact with TR1.
2. In thermal contact with DUT.

NPN microwave power transistor

LLE15180X

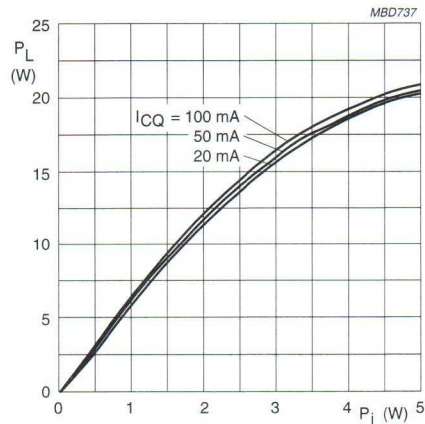

$V_{CE} = 24$ V; $f = 1850$ MHz.

Fig.5 Load power as a function of input power.


Input and optimum load impedances

$V_{CE} = 24$ V; $I_{CQ} = 50$ mA; $Z_o = 10 \Omega$ (see Figs 6 and 7); typical values at $P_L = P_{L1}$.

f (GHz)	Z_i (Ω)	Z_L (Ω)
1.40	$3.7 + j6.9$	$14.0 - j1.8$
1.45	$4.6 + j7.4$	$12.5 + j0.5$
1.50	$5.8 + j7.7$	$11.0 + j0.1$
1.55	$7.4 + j7.8$	$9.7 + j0.4$
1.60	$9.3 + j7.4$	$8.5 + j0.3$


NPN microwave power transistor

LLE15180X

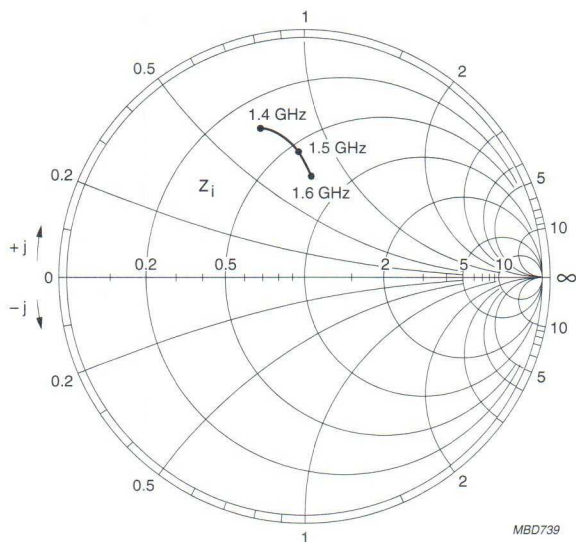

$V_{CE} = 24 \text{ V}$; $Z_0 = 10 \Omega$; $I_{CQ} = 50 \text{ mA}$.

Fig.6 Input impedance as a function of frequency; typical values at $P_L = P_{L1}$.

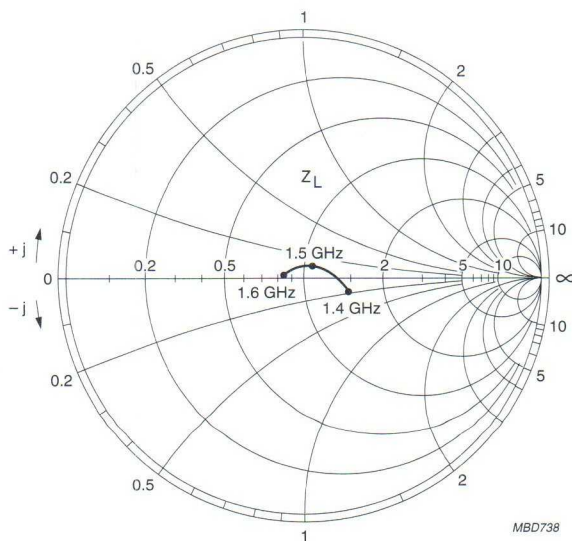

$V_{CE} = 24 \text{ V}$; $Z_0 = 10 \Omega$; $I_{CQ} = 50 \text{ mA}$.

Fig.7 Optimum load impedance as a function of frequency; typical values at $P_L = P_{L1}$.

NPN microwave power transistor

LLE15370X

FEATURES

- Diffused emitter ballasting resistors providing excellent current sharing and withstanding a high VSWR
- Interdigitated structure provides high emitter efficiency
- Gold metallization realizes very good stability of the characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance
- Internal input and output prematching ensures good stability and allows an easier design of wideband circuits.

APPLICATION

Intended for use in common emitter, class AB amplifiers in CW conditions for professional applications between 1.4 GHz and 1.6 GHz.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT437A glued cap metal ceramic flange package, with emitter connected to flange.


QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common emitter class AB amplifier.

MODE OF OPERATION	f (GHz)	V _{CE} (V)	I _{CQ} (A)	P _{L1} (W)	G _{po} (dB)	η _C (%)	Z _i ; Z _L (Ω)
Class AB (CW)	1.5	24	0.3	≥33	≥8	typ. 43	see Figs 8 and 9

PINNING - SOT437A

PIN	DESCRIPTION
1	collector
2	base
3	emitter connected to flange

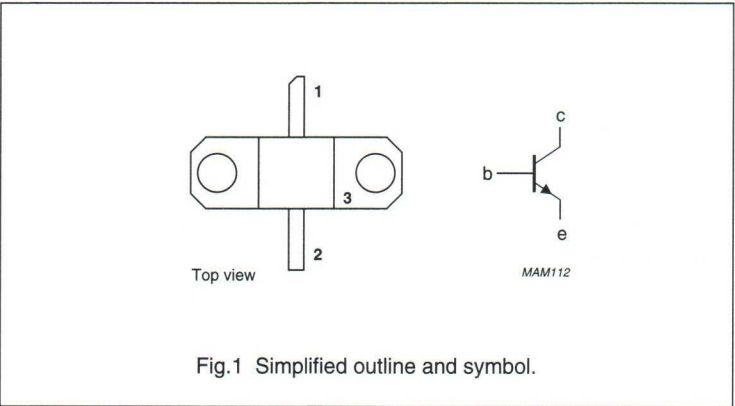

WARNING
Product and environmental safety - toxic materials
This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

NPN microwave power transistor

LLE15370X



LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	—	45	V
V_{CER}	collector-emitter voltage	$R_{BE} = 220 \, \Omega$	—	30	V
V_{CEO}	collector-emitter voltage	open base	—	15	V
V_{EBO}	emitter-base voltage	open collector	—	3	V
I_C	DC collector current		—	6	A
P_i	input power	$f = 1.5 \text{ GHz}$; $V_{CE} = 24 \text{ V}$; class AB	—	8	W
P_{tot}	total power dissipation	$T_{mb} = 75 \, ^\circ\text{C}$	—	50	W
T_{stg}	storage temperature		−65	+150	$^\circ\text{C}$
T_j	junction temperature		—	200	$^\circ\text{C}$
T_{sld}	soldering temperature	$t \leq 10 \text{ s}$; note 1	—	235	$^\circ\text{C}$

Note

1. Up to 0.2 mm from ceramic.

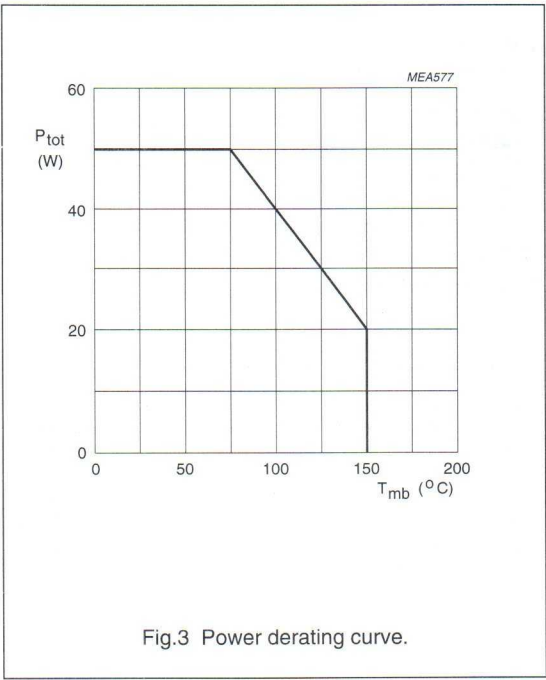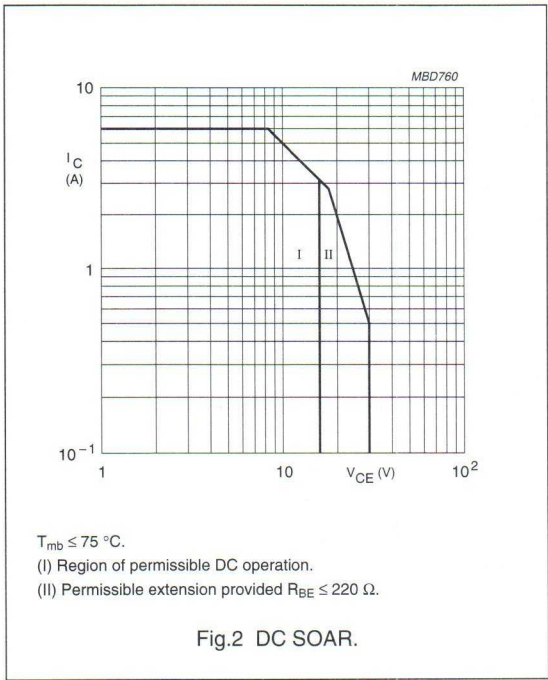

NPN microwave power transistor

LLE15370X

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	$T_j = 100\ ^\circ\text{C}$	2	K/W
$R_{th\ mb-h}$	thermal resistance from mounting base to heatsink	note 1	0.2	K/W

Note

1. See "Mounting recommendations in the General part of handbook SC15".

CHARACTERISTICS

$T_j = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
I_{CBO}	collector cut-off current	$I_E = 0$; $V_{CB} = 20\ \text{V}$	–	3	mA
$V_{(BR)CER}$	collector-emitter breakdown voltage	$I_C = 15\ \text{mA}$; $R_{BE} = 220\ \Omega$	30	–	V
$V_{(BR)CBO}$	collector-base breakdown voltage	$I_C = 15\ \text{mA}$	45	–	V
$V_{(BR)EBO}$	emitter-base breakdown voltage	$I_E = 15\ \text{mA}$	3	–	V
h_{FE}	DC current gain	$I_C = 1\ \text{A}$; $V_{CE} = 3\ \text{V}$	15	100	

APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ in a common emitter class AB amplifier.



MODE OF OPERATION	f (GHz)	V_{CE} (V)	I_{CQ} (A)	P_{L1} (W)	G_{po} (dB)	η_c (%)	Z_i ; Z_L (Ω)
Class AB (CW) note 1	1.5	24	0.3	≥ 33 ; typ. 37	≥ 8 ; typ. 8.7	typ. 43	see Figs 8 and 9

Note

1. d_{im} is less than $-30\ \text{dBc}$ at $P_o = 15\ \text{W}$ (av); $f = 200\ \text{kHz}$.

NPN microwave power transistor

LLE15370X

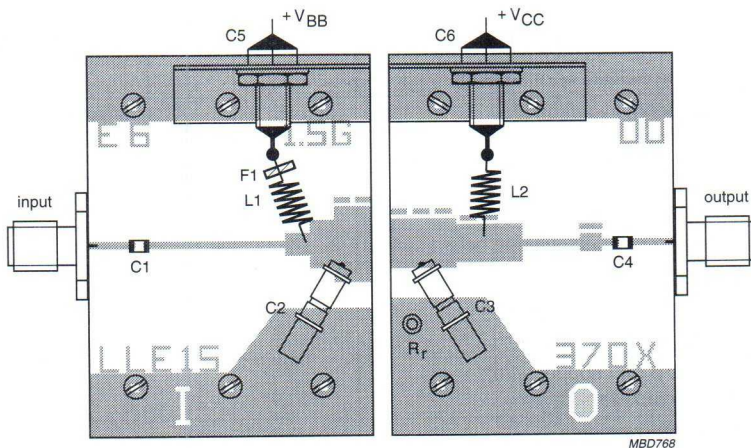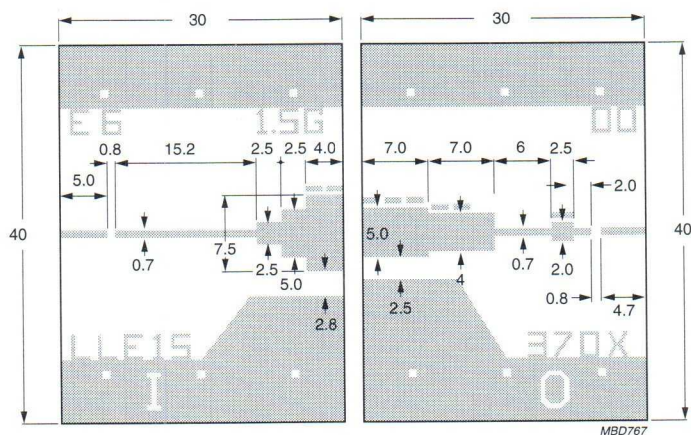

The test circuit is split into two independent halves, each being 30 × 30 mm in size.

Dimensions in mm.

Substrate: Epsilam 10.

Thickness: 0.635 mm.

Permittivity: $\epsilon_r = 10$.

Fig.4 Prematching test circuit board.

NPN microwave power transistor

LLE15370X

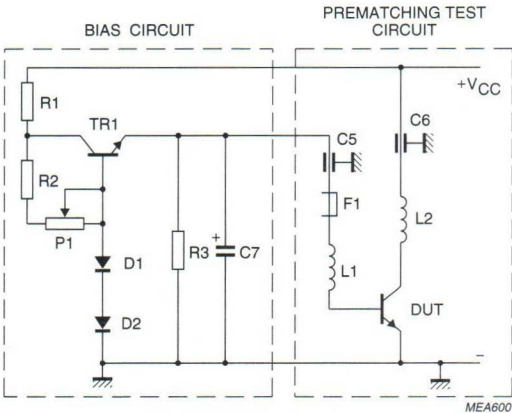


Fig.5 Class AB bias circuit.

List of components (see Figs 4 and 5)


COMPONENT	DESCRIPTION	VALUE	ORDERING INFORMATION
TR1	transistor, BDT91 or equivalent		
C1, C4	DC blocking chip capacitor	100 pF	ATC 100A101kp
C2, C3	trimmer capacitor	0.5 to 5.0 pF	Tekelec 727-1
C5, C6	feedthrough bypass capacitor	1 500 pF	Erie 1250-003
C7	electrolytic capacitor	10 µF, >30 V	
D1	diode BY239 or equivalent; note 1		
D2	diode BY239 or equivalent; note 2		
L1	4 turns 0.5 mm copper wire; internal diameter = 2 mm		
L2	3 turns 0.5 mm copper wire; internal diameter = 2 mm		
P1	linear potentiometer	4.7 kΩ	
R1	resistor	100 Ω, 0.25 W	
R2	resistor	10 kΩ, 0.25 W	
R3	resistor	56 Ω, 0.25 W	
F1	ferrite bead		Philips tube, 12NC = 4330 030 43081 4.2 × 2.2 × 3.2 mm (4B1)
R _r	copper rivet		

Notes

- 1. In thermal contact with TR1.
- 2. In thermal contact with DUT.


NPN microwave power transistor

LLE15370X

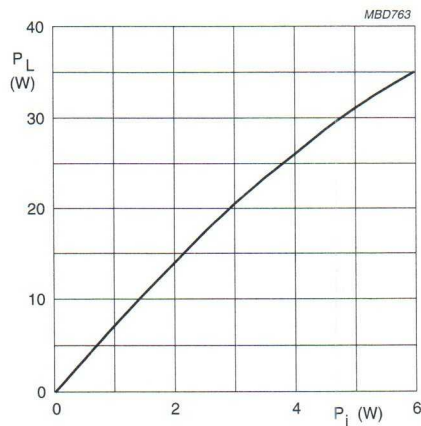

$V_{CE} = 24\text{ V}$; $f = 1500\text{ MHz}$.

Fig.6 Load power as a function of input power.

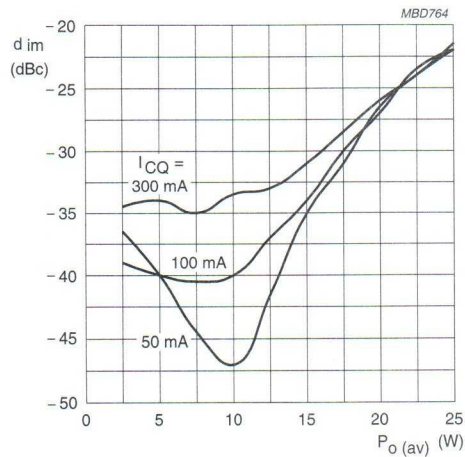

$V_{CE} = 24\text{ V}$; $f_1 = 1500\text{ MHz}$; $f_2 = 1500.2\text{ MHz}$.

Fig.7 Intermodulation distortion as a function of average output power.


Input and optimum load impedances

$V_{CE} = 24\text{ V}$; $I_{CQ} = 0.3\text{ A}$ (see Figs 8 and 9).

f (GHz)	Z_i (Ω)	Z_L (Ω)
1.40	$2.4 + j4.4$	$5.5 - j1.8$
1.45	$3.2 + j4.6$	$5.1 - j1.3$
1.50	$4.2 + j4.5$	$4.7 - j1.0$
1.55	$5.3 + j3.8$	$4.2 - j0.9$
1.60	$6.2 + j2.5$	$3.8 - j0.8$


NPN microwave power transistor

LLE15370X

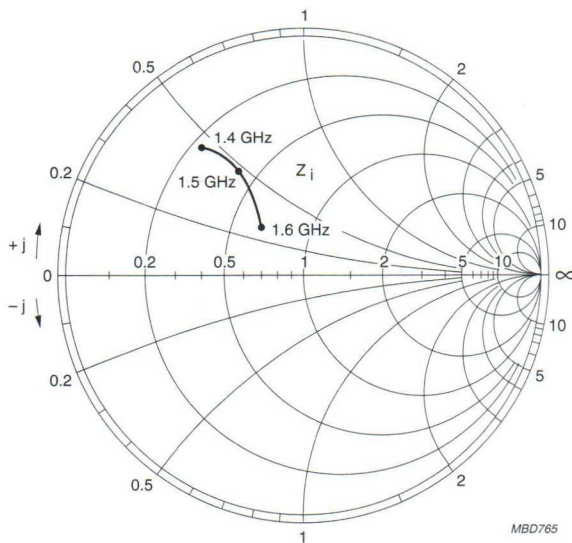

$V_{CE} = 24 \text{ V}$; $Z_o = 10 \Omega$; $I_{CQ} = 0.3 \text{ A}$.

Fig.8 Input impedance as a function of frequency; typical values.

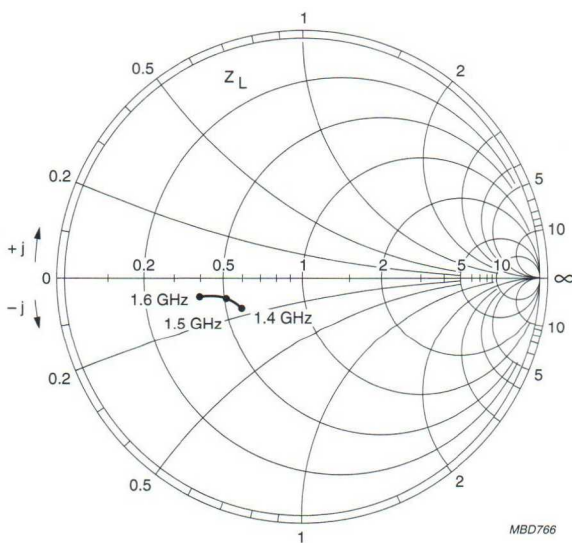

$V_{CE} = 24 \text{ V}$; $Z_o = 10 \Omega$; $I_{CQ} = 0.3 \text{ A}$.

Fig.9 Optimum load impedance as a function of frequency; typical values.

NPN microwave power transistor

LLE16045X

FEATURES

- Diffused emitter ballasting resistors providing excellent current sharing and withstanding a high VSWR
- Interdigitated structure provides high emitter efficiency
- Gold metallization realizes very good stability of the characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance
- Internal input prematching ensures good stability and allows an easier design of wideband circuits.

APPLICATIONS

Intended for use in common emitter, class AB amplifiers in CW conditions for professional applications between 1.5 GHz and 1.8 GHz.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT437A glued cap metal ceramic flange package, with emitter connected to flange.


QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common emitter class AB amplifier.

MODE OF OPERATION	f (GHz)	V _{CE} (V)	I _{CQ} (A)	P _{L1} (W)	G _{po} (dB)	η _c (%)	Z _i ; Z _L (Ω)
Class AB (CW)	1.65	24	0.04	≥4.5	≥8.5	typ. 50	see Figs 8 and 9

PINNING - SOT437A

PIN	DESCRIPTION
1	collector
2	base
3	emitter connected to flange

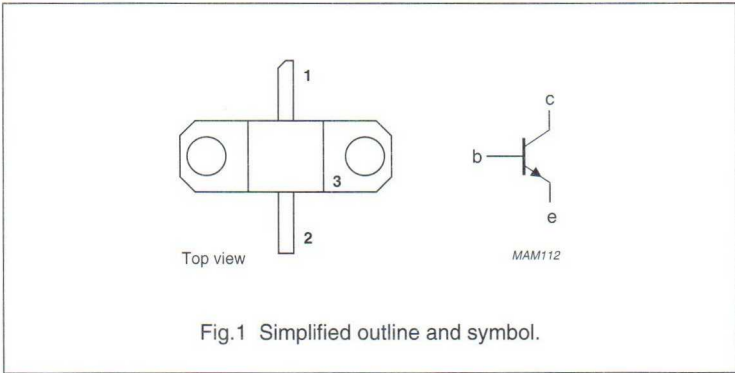

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

NPN microwave power transistor

LLE16045X



LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	—	45	V
V_{CER}	collector-emitter voltage	$R_{BE} = 220 \Omega$	—	30	V
V_{CEO}	collector-emitter voltage	open base	—	15	V
V_{EBO}	emitter-base voltage	open collector	—	3	V
I_C	DC collector current		—	0.5	A
P_i	input power	$f = 1.65 \text{ GHz}$; $V_{CE} = 24 \text{ V}$; class AB	—	1	W
P_{tot}	total power dissipation	$T_{mb} = 75^\circ\text{C}$	—	11	W
T_{stg}	storage temperature		-65	+150	$^\circ\text{C}$
T_j	junction temperature		—	200	$^\circ\text{C}$
T_{sld}	soldering temperature	$t \leq 10 \text{ s}$; note 1	—	235	$^\circ\text{C}$

Note

- Up to 0.2 mm from ceramic.

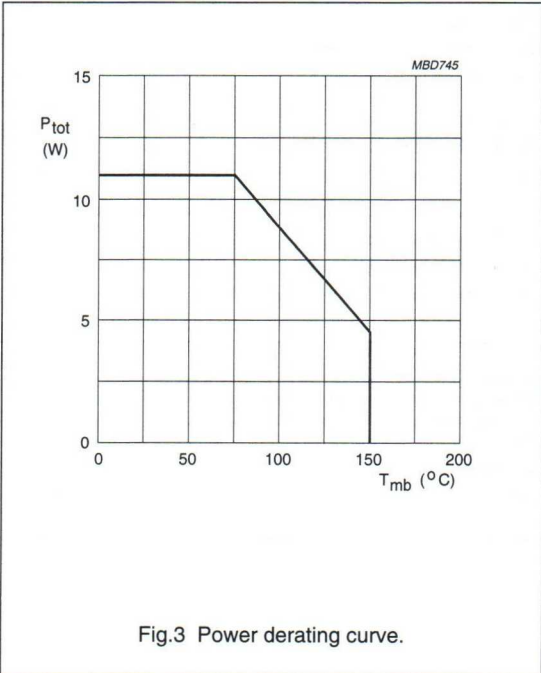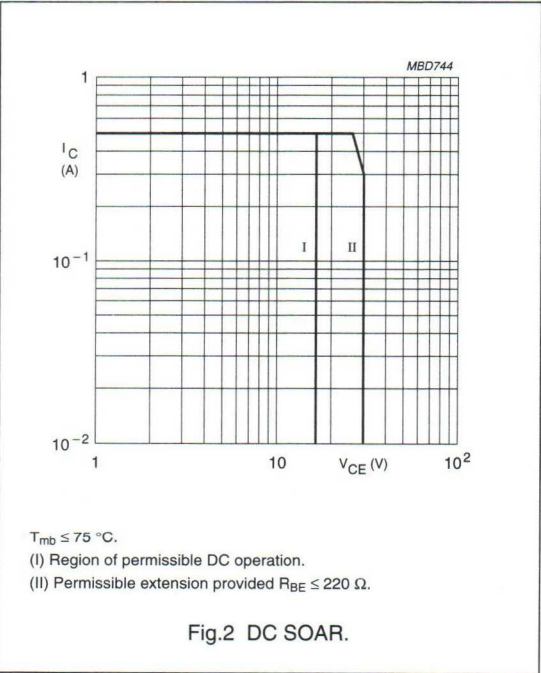

NPN microwave power transistor

LLE16045X

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	$T_j = 100\ ^\circ\text{C}$	8.5	K/W
$R_{th\ mb-h}$	thermal resistance from mounting base to heatsink	note 1	0.2	K/W

Note

1. See "Mounting recommendations in the General part of handbook SC15".

CHARACTERISTICS

$T_j = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
I_{CBO}	collector cut-off current	$I_E = 0$; $V_{CB} = 20\ \text{V}$	–	75	μA
$V_{(BR)CER}$	collector-emitter breakdown voltage	$I_C = 1\ \text{mA}$; $R_{BE} = 220\ \Omega$	30	–	V
$V_{(BR)CBO}$	collector-base breakdown voltage	$I_C = 1\ \text{mA}$	45	–	V
$V_{(BR)EBO}$	emitter-base breakdown voltage	$I_E = 1\ \text{mA}$	3	–	V
h_{FE}	DC current gain	$I_C = 0.25\ \text{A}$; $V_{CE} = 5\ \text{V}$	15	100	


APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ in a common emitter class AB amplifier.

MODE OF OPERATION	f (GHz)	V_{CE} (V)	I_{CQ} (A)	P_{L1} (W)	G_{po} (dB)	η_c (%)	Z_i ; Z_L (Ω)
Class AB (CW)	1.65	24	0.04	≥ 4.5 typ. 5.5	≥ 8.5 typ. 9.5	typ. 50	see Figs 8 and 9

NPN microwave power transistor

LLE16045X

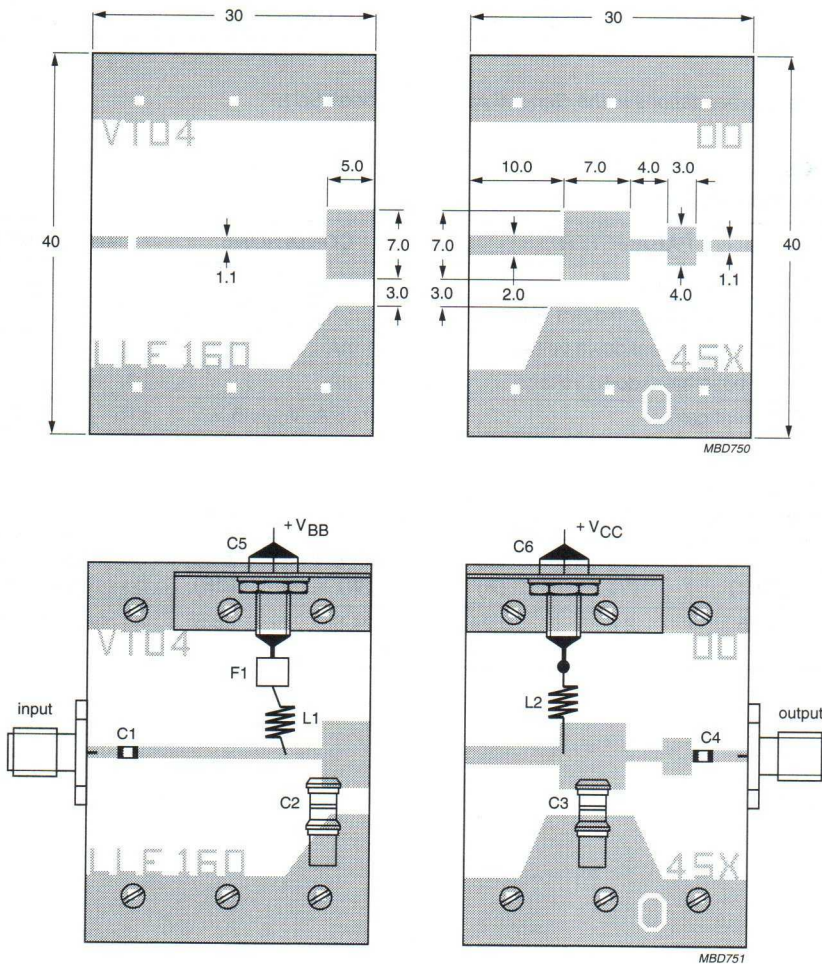

The test circuit is split into two independent halves, each being 30 × 40 mm in size.

Dimensions in mm.

Substrate: Teflon fibreglass.

Thickness: 0.4 mm.

Permittivity: $\epsilon_r = 2.55$.

Fig.4 Prematching test circuit board.

NPN microwave power transistor

LLE16045X

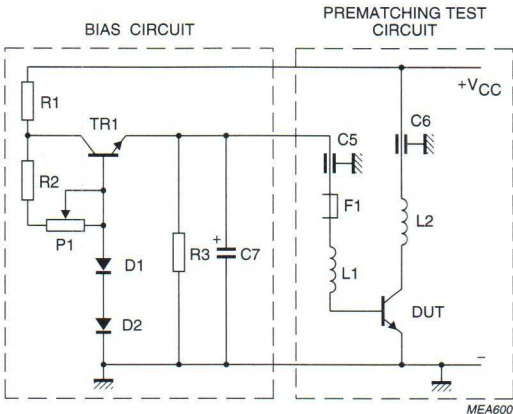


Fig.5 Class AB bias circuit.

List of components (see Figs 4 and 5)


COMPONENT	DESCRIPTION	VALUE	ORDERING INFORMATION
TR1	transistor, BD239 or equivalent		
C1, C4	DC blocking chip capacitor	100 pF	ATC 100A101kp
C2, C3	trimmer capacitor	0.5 to 5.0 pF	Tekelec 727-1SL
C5, C6	feedthrough bypass capacitor	1500 pF	Erie 1250-003
C7	electrolytic capacitor	10 μ F, >30 V	
D1	diode BY239 or equivalent; note 1		
D2	diode BY239 or equivalent; note 2		
L1	4 turns 0.5 mm copper wire; internal diameter = 2 mm		
L2	3 turns 0.5 mm copper wire; internal diameter = 2 mm		
P1	linear potentiometer	4.7 k Ω	
R1	resistor	100 Ω , 0.25 W	
R2	resistor	1.5 k Ω , 0.25 W	
R3	resistor	56 Ω , 0.25 W	
F1	ferrite bead		Philips tube, 12NC = 4330 030 43081 4.2 $\times$ 2.2 $\times$ 3.2 mm (4B1)

Notes

1. In thermal contact with TR1.
2. In thermal contact with DUT.


NPN microwave power transistor

LLE16045X

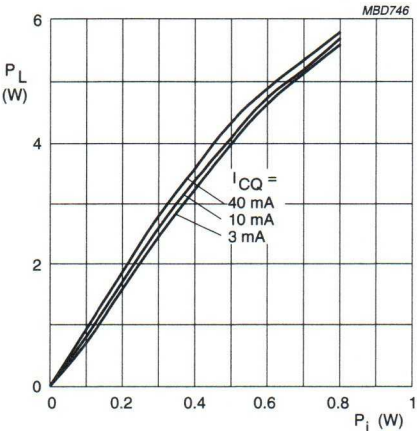

$V_{CE} = 24\text{ V}$; $f = 1650\text{ MHz}$.

Fig.6 Load power as a function of input power.

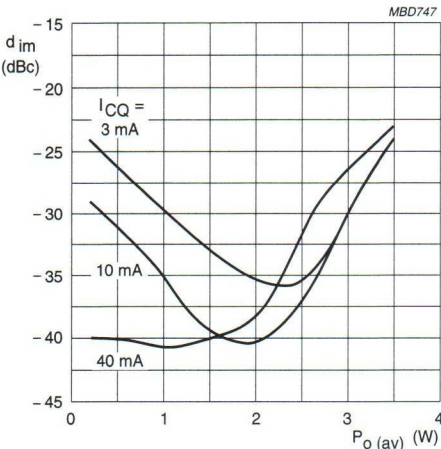

$V_{CE} = 24\text{ V}$; $f_1 = 1650\text{ MHz}$; $f_2 = 1650.2\text{ MHz}$.

Fig.7 Intermodulation distortion as a function of average output power.


Input and optimum load impedances

$V_{CE} = 24\text{ V}$; $I_{CQ} = 40\text{ mA}$ (see Figs 8 and 9); typical values at $P_L = P_{L1}$.

f (GHz)	Z_i (Ω)	Z_L (Ω)
1.50	$6.8 + j14.2$	$6.1 + j8.3$
1.55	$7.9 + j15.1$	$5.8 + j7.8$
1.60	$9.2 + j16.0$	$5.6 + j7.3$
1.65	$10.9 + j16.8$	$5.4 + j6.9$
1.70	$13.0 + j17.5$	$5.2 + j6.4$
1.75	$15.5 + j17.8$	$5.0 + j6.0$
1.80	$18.6 + j17.6$	$4.8 + j5.5$


NPN microwave power transistor

LLE16045X

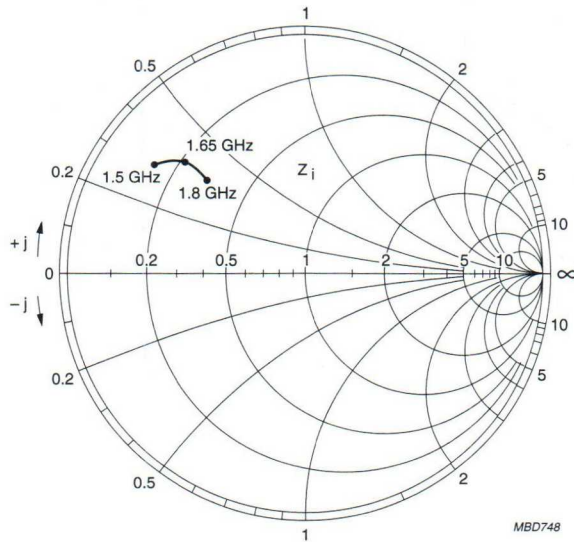

$V_{CE} = 24 \text{ V}$; $Z_o = 50 \Omega$; $I_{CQ} = 40 \text{ mA}$.

Fig.8 Input impedance as a function of frequency; typical values at $P_L = P_{L1}$.

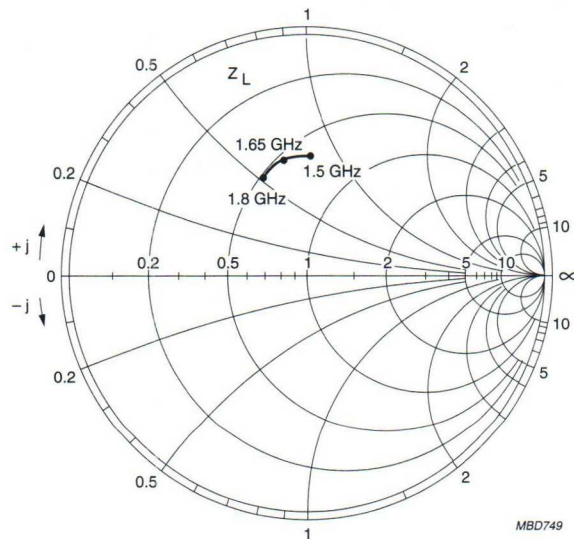

$V_{CE} = 24 \text{ V}$; $Z_o = 10 \text{ W}$; $I_{CQ} = 40 \text{ mA}$.

Fig.9 Optimum load impedance as a function of frequency; typical values at $P_L = P_{L1}$.

NPN microwave power transistor

LLE16120X

FEATURES

- Diffused emitter ballasting resistors providing excellent current sharing and withstanding a high VSWR
- Interdigitated structure provides high emitter efficiency
- Gold metallization realizes very good stability of the characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance
- Internal input prematching ensures good stability and allows an easier design of wideband circuits.

APPLICATIONS

Intended for use in common emitter, class AB power amplifiers in CW conditions for professional applications at 1.65 GHz.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT437A glued cap metal ceramic flange package, with emitter connected to flange.

QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common emitter class AB amplifier.

MODE OF OPERATION	f (GHz)	V_{CE} (V)	I_{CQ} (A)	P_{L1} (W)	G_{po} (dB)	$Z_i; Z_L$ (Ω)
Class AB (CW)	1.65	24	0.1	≥ 11	≥ 8.7	see Figs 8 and 9

PINNING - SOT437A

PIN	DESCRIPTION
1	collector
2	base
3	emitter connected to flange





Fig.1 Simplified outline and symbol.

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO disc is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

NPN microwave power transistor

LLE16120X



LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	–	45	V
V_{CER}	collector-emitter voltage	$R_{BE} = 220 \, \Omega$	–	30	V
V_{CEO}	collector-emitter voltage	open base	–	15	V
V_{EBO}	emitter-base voltage	open collector	–	3	V
I_C	collector current (DC)		–	2	A
P_{tot}	total power dissipation	$T_{mb} = 75 \, ^\circ\text{C}$	–	23	W
T_{stg}	storage temperature		–65	+150	$^\circ\text{C}$
T_j	junction temperature		–	200	$^\circ\text{C}$
T_{sld}	soldering temperature	$t \leq 10 \, \text{s}$; note1	–	235	$^\circ\text{C}$

Note

1. Up to 0.2 mm from ceramic.

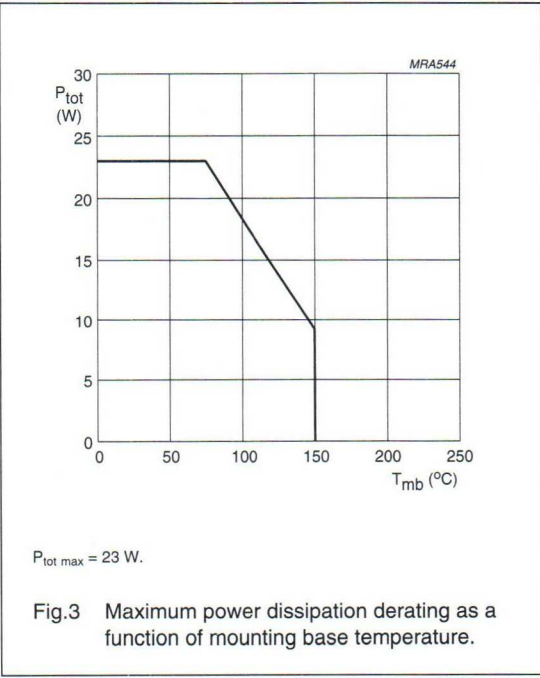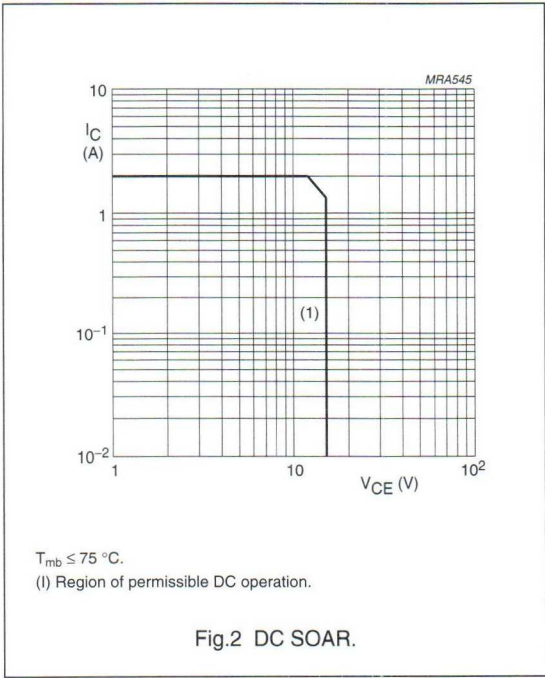

NPN microwave power transistor

LLE16120X

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	$T_j = 100\ ^\circ\text{C}$	4.2	K/W
$R_{th\ mb-h}$	thermal resistance from mounting base to heatsink	note1	0.2	K/W

Note

1. See "Mounting recommendations in the General part of handbook SC15".

CHARACTERISTICS

$T_j = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 20\ \text{V}; I_E = 0$	–	1	mA
$V_{(BR)CER}$	collector-emitter breakdown voltage	$I_C = 5\ \text{mA}; R_{BE} = 220\ \Omega$	30	–	V
$V_{(BR)CBO}$	collector-base breakdown voltage	$I_C = 5\ \text{mA}; I_B = 0$	45	–	V
$V_{(BR)EBO}$	emitter-base breakdown voltage	$I_E = 5\ \text{mA}; I_C = 0$	3	–	V
h_{FE}	DC current gain	$V_{CE} = 3\ \text{V}; I_C = 1\ \text{A}$	15	100	

APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ in a common emitter class AB amplifier (note 1).


MODE OF OPERATION	f (GHz)	V_{CE} (V)	I_{CQ} (A)	P_{L1} (W)	G_{po} (dB)	η_c (%)	$Z_i; Z_L$ (Ω)
Class AB (CW)	1.65	24	0.1	≥ 11 ; typ. 13	≥ 8.7 ; typ. 10.8	typ. 45	see Figs 8 and 9

Note

1. The test circuit is split into 2 independant halves each being $30 \times 40\ \text{mm}$ in size.

NPN microwave power transistor

LLE16120X

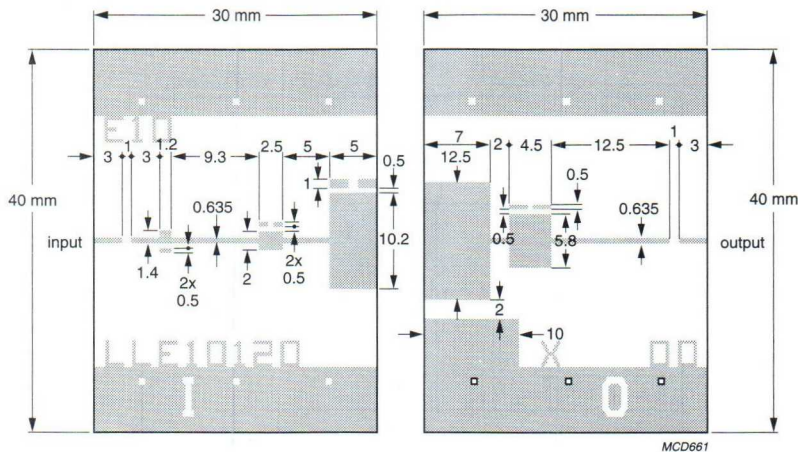

Substrate: Epsilam 10.
Thickness: 0.635 mm.
Permittivity: $\epsilon_r = 10$.

Fig.4 Prematching test circuit board.

List of components (see bias circuit)

COMPONENT	DESCRIPTION	VALUE	ORDERING INFORMATION
TR1	transistor, BDT85 (or equivalent)		
D1	diode, BY239800 (or equivalent); note 1		
D2	diode, BY239800; note 2		
R1	resistor	100 Ω	
R2	resistor	3.3 k Ω	
R3	resistor	56 Ω	
P1	potentiometer, 10 turns (sferrice)	4.7 k Ω	
C1	electrolytic capacitor	10 μ F, 40 V	
C5, C6	feedthrough bypass capacitor	1500 pF	Erie, ref. 1250-003
L1	5 turns 0.5 mm copper wire with ferrite bead		
L2	5 turns 0.5 mm copper wire		

Notes

1. In thermal contact with TR1.
2. In thermal contact with D.U.T.

NPN microwave power transistor

LLE16120X


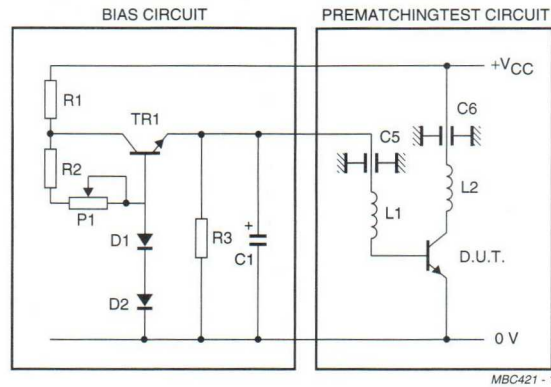



Fig.5 Class AB bias circuit at 1.65 GHz.

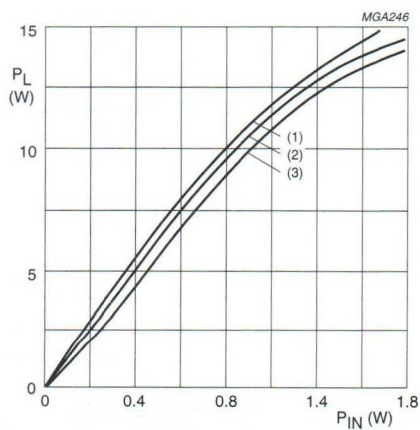

$V_{CE} = 24$ V; $f = 1.65$ GHz.

- (1) $I_{CQ} = 100$ mA.
- (2) $I_{CQ} = 30$ mA.
- (3) $I_{CQ} = 3$ mA.

Fig.6 Load power as a function of input power.

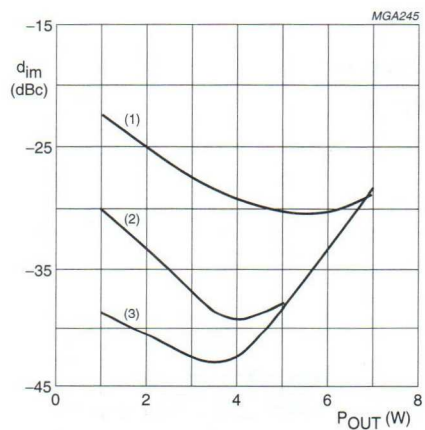


$V_{CE} = 24$ V; $f_1 = 1.65$ GHz; $f_2 = 1.6502$ GHz.

- (1) $I_{CQ} = 3$ mA.
- (2) $I_{CQ} = 30$ mA.
- (3) $I_{CQ} = 100$ mA.

Fig.7 Intermodulation distortion as a function of average output power.


NPN microwave power transistor

LLE16120X

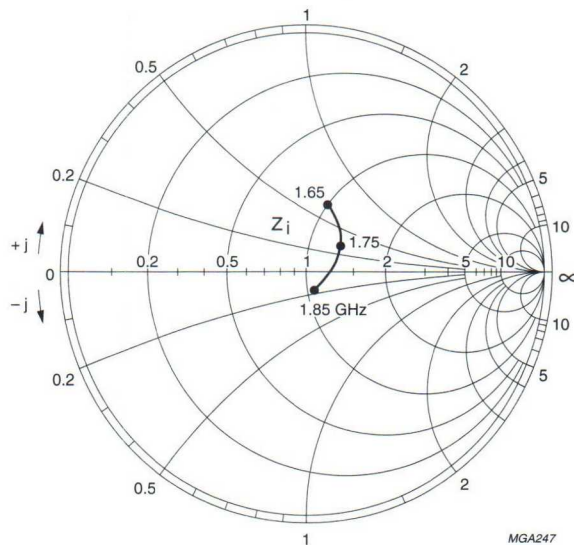

$V_{CE} = 24 \text{ V}$; $Z_0 = 10 \Omega$; $I_{CQ} = 0.1 \text{ A}$.

Fig.8 Input impedance as a function of frequency; typical values.

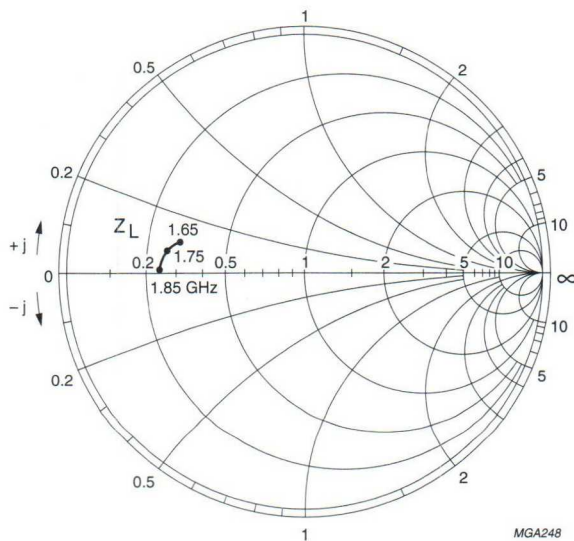

$V_{CE} = 24 \text{ V}$; $Z_0 = 10 \Omega$; $I_{CQ} = 0.1 \text{ A}$.

Fig.9 Optimum load impedance as a function of frequency; typical values.

NPN microwave power transistor

LLE16350X

FEATURES

- Diffused emitter ballasting resistors providing excellent current sharing and withstanding a high VSWR
- Interdigitated structure provides high emitter efficiency
- Gold metallization realizes very good stability of the characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance
- Internal input and output prematching ensures good stability and allows an easier design of wideband circuits.

APPLICATIONS

Intended for use in common emitter, class AB amplifiers in CW conditions for professional applications between 1.5 GHz and 1.8 GHz.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT437A glued cap metal ceramic flange package, with emitter connected to flange.

QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common emitter class AB amplifier.

MODE OF OPERATION	f (GHz)	V_{CE} (V)	I_{CQ} (A)	P_{L1} (W)	G_{po} (dB)	η_c (%)	$Z_i; Z_L$ (Ω)
Class AB (CW)	1.65	24	0.1	≥ 29	≥ 8	typ. 48	see Figs 8 and 9

PINNING - SOT437A

PIN	DESCRIPTION
1	collector
2	base
3	emitter connected to flange

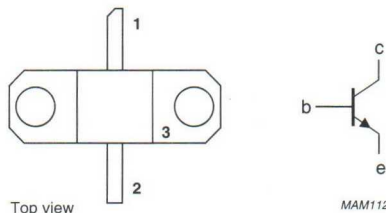


Fig.1 Simplified outline and symbol.

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

NPN microwave power transistor

LLE16350X



LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	—	45	V
V_{CER}	collector-emitter voltage	$R_{BE} = 220 \Omega$	—	30	V
V_{CEO}	collector-emitter voltage	open base	—	15	V
V_{EBO}	emitter-base voltage	open collector	—	3	V
I_C	DC collector current		—	6	A
P_i	input power	$f = 1.65 \text{ GHz}$; $V_{CE} = 24 \text{ V}$; class AB	—	8	W
P_{tot}	total power dissipation	$T_{mb} = 75 \text{ }^\circ\text{C}$	—	50	W
T_{stg}	storage temperature		-65	+150	$^\circ\text{C}$
T_j	junction temperature		—	200	$^\circ\text{C}$
T_{sld}	soldering temperature	$t \leq 10 \text{ s}$; note 1	—	235	$^\circ\text{C}$

Note

1. Up to 0.2 mm from ceramic.

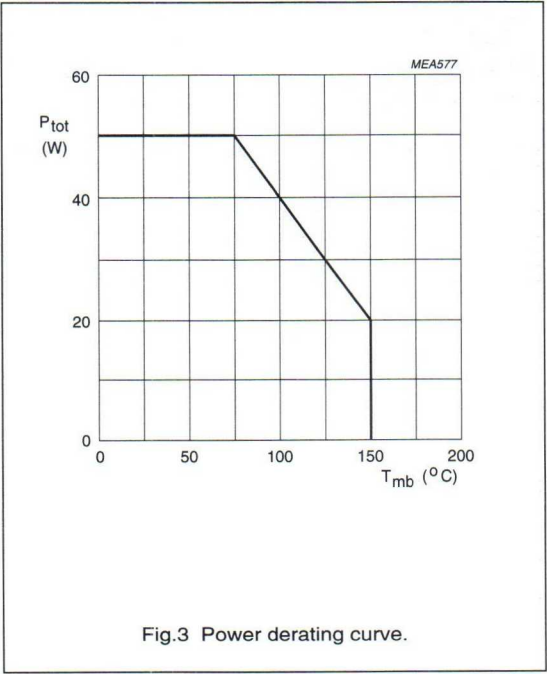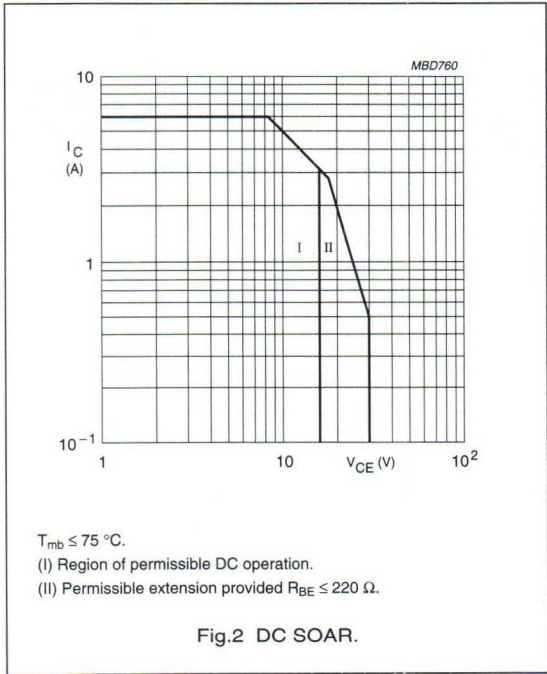

NPN microwave power transistor

LLE16350X

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	$T_j = 100\ ^\circ\text{C}$	max. 2	K/W
$R_{th\ mb-h}$	thermal resistance from mounting base to heatsink		typ. 0.2	K/W

CHARACTERISTICS

 $T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
I_{CBO}	collector cut-off current	$I_E = 0$; $V_{CB} = 20\ \text{V}$	–	3	mA
$V_{(BR)CER}$	collector-emitter breakdown voltage	$I_C = 15\ \text{mA}$; $R_{BE} = 220\ \Omega$	30	–	V
$V_{(BR)CBO}$	collector-base breakdown voltage	$I_C = 15\ \text{mA}$	45	–	V
$V_{(BR)EBO}$	emitter-base breakdown voltage	$I_E = 15\ \text{mA}$	3	–	V
h_{FE}	DC current gain	$I_C = 1\ \text{A}$; $V_{CE} = 3\ \text{V}$	15	100	


APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ in a common emitter class AB amplifier.

MODE OF OPERATION	f (GHz)	V_{CE} (V)	I_{CQ} (A)	P_{L1} (W)	G_{po} (dB)	η_c (%)	Z_i ; Z_L (Ω)
Class AB (CW)	1.65	24	0.1	≥ 29 typ. 32	≥ 8 typ. 9	typ. 48	see Figs 8 and 9

NPN microwave power transistor

LLE16350X

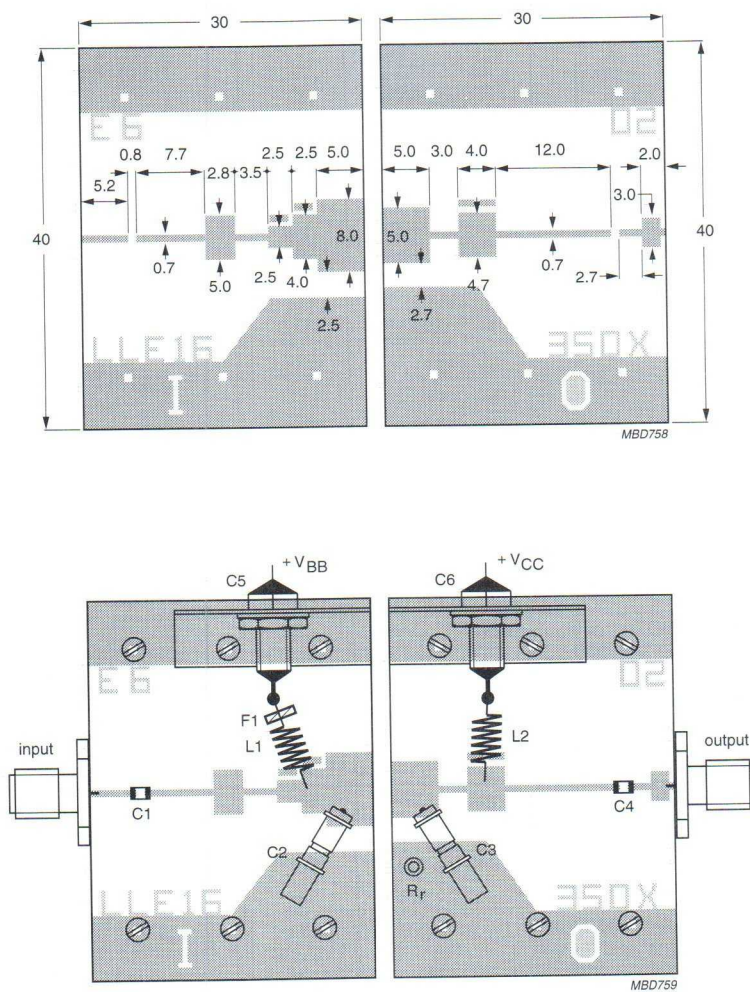

The test circuit is split into two independent halves, each being 30 × 40 mm in size.
 Dimensions in mm.
 Substrate: Epsilam 10.
 Thickness: 0.635 mm.
 Permittivity: $\epsilon_r = 10$.

Fig.4 Prematching test circuit board.

NPN microwave power transistor

LLE16350X

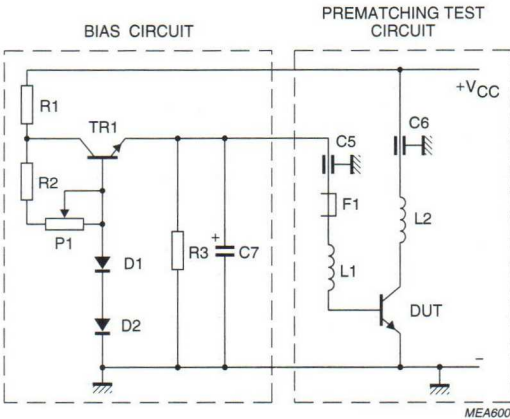


Fig.5 Class AB bias circuit.

List of components (see Figs 4 and 5)



COMPONENT	DESCRIPTION	VALUE	ORDERING INFORMATION
TR1	transistor, BDT91 or equivalent		
C1, C4	DC blocking chip capacitor	100 pF	ATC 100A101kp
C2, C3	trimmer capacitor	0.5 to 5.0 pF	Tekelec 727-1
C5, C6	feedthrough bypass capacitor	1500 pF	Erie 1250-003
C7	electrolytic capacitor	10 μ F, >30 V	
D1	diode BY239 or equivalent; note 1		
D2	diode BY239 or equivalent; note 2		
L1	4 turns 0.5 mm copper wire; internal diameter = 2 mm		
L2	3 turns 0.5 mm copper wire; internal diameter = 2 mm		
P1	linear potentiometer	4.7 k Ω	
R1	resistor	100 Ω , 0.25 W	
R2	resistor	10 k Ω , 0.25 W	
R3	resistor	56 Ω , 0.25 W	
F1	ferrite bead		Philips tube, 12NC = 4330 030 43081 4.2 $\times$ 2.2 $\times$ 3.2 mm (4B1)
R _r	copper rivet		

Notes

- 1. In thermal contact with TR1.
- 2. In thermal contact with DUT.

NPN microwave power transistor

LLE16350X

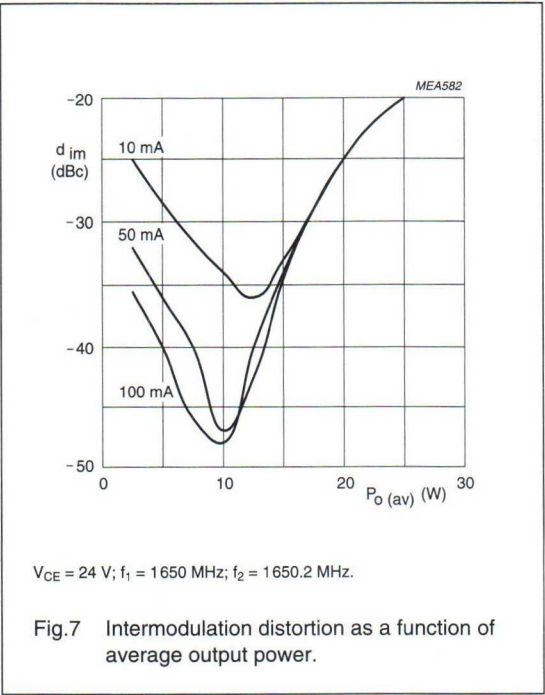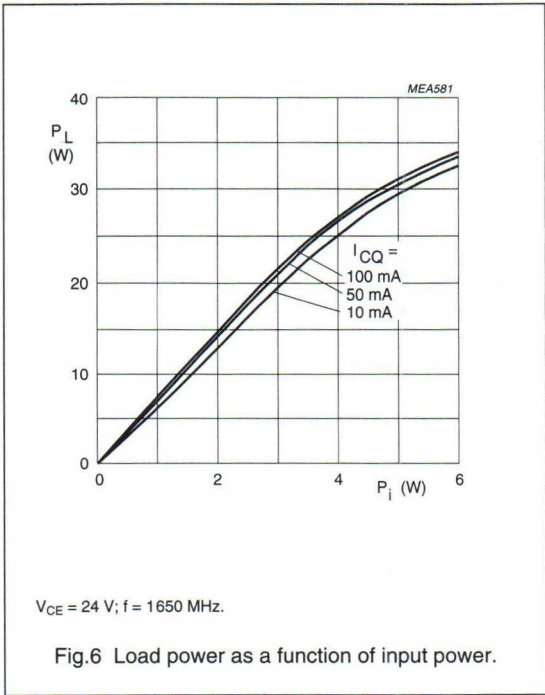


Input and optimum load impedances

$V_{CE} = 24\text{ V}$; $I_{CQ} = 0.1\text{ A}$ (see Figs 8 and 9); typical values at $P_L = P_{L1}$.

f (GHz)	Z_i (Ω)	Z_L (Ω)
1.50	$4.15 + j4.45$	$4.6 - j1.0$
1.55	$5.3 + j3.8$	$4.2 - j0.85$
1.60	$6.2 + j2.45$	$3.8 - j0.8$
1.65	$6.1 + j0.7$	$3.4 - j0.8$
1.70	$5.1 - j0.6$	$3.05 - j0.9$
1.75	$3.9 - j1.1$	$2.75 - j1.0$
1.80	$2.9 - j1.1$	$2.5 - j1.15$


NPN microwave power transistor

LLE16350X

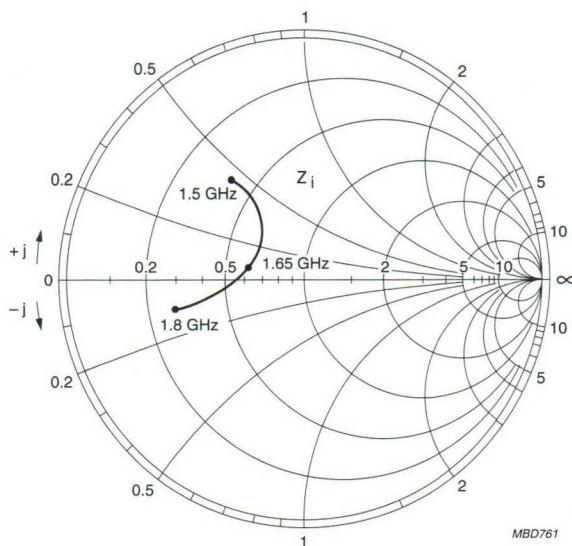

$V_{CE} = 24 \text{ V}$; $Z_0 = 10 \Omega$; $I_{CQ} = 0.1 \text{ A}$.

Fig.8 Input impedance as a function of frequency; typical values at $P_L = P_{L1}$.

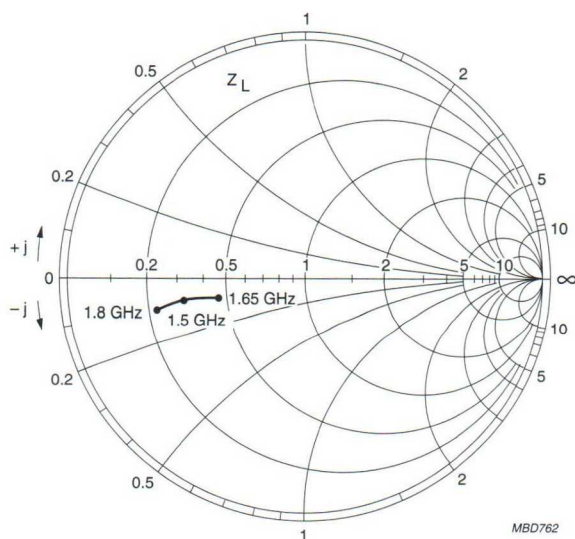

$V_{CE} = 24 \text{ V}$; $Z_0 = 100 \Omega$; $I_{CQ} = 0.1 \text{ A}$.

Fig.9 Optimum load impedance as a function of frequency; typical values at $P_L = P_{L1}$.

NPN microwave power transistor

LTE21009R

FEATURES

- Diffused emitter ballasting resistors
- Self-aligned process entirely ion implanted and gold sandwich metallization
- optimum temperature profile
- excellent performance and reliability
- Input matching cell improves input impedance and facilitates the design of wideband circuits.

APPLICATIONS


- Common emitter class-A linear power amplifiers up to 4.2 GHz.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT440A metal ceramic flange package with the emitter connected to the flange.

PINNING - SOT440A

PIN	DESCRIPTION
1	collector
2	base
3	emitter connected to flange

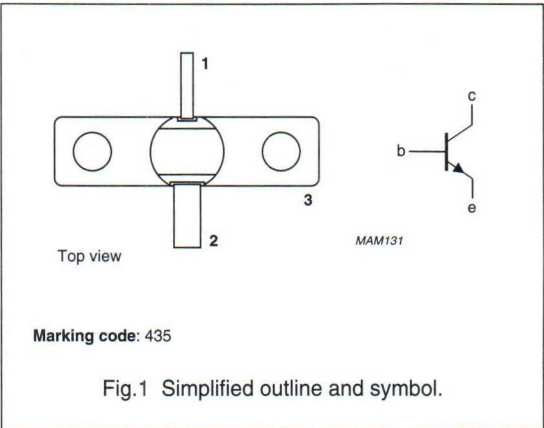

QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common emitter class-A amplifier.

MODE OF OPERATION	f (GHz)	V _{CE} (V)	I _C (mA)	P _{L1} (W)	G _{po} (dB)
Class-A	2.1	16	150	≥0.6	≥10

WARNING
Product and environmental safety - toxic materials
This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.



NPN microwave power transistor

LTE21009R

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	–	40	V
V_{CER}	collector-emitter voltage	$R_{BE} = 100 \Omega$	–	35	V
V_{CEO}	collector-emitter voltage	open base	–	16	V
V_{EBO}	emitter-base voltage	open collector	–	3	V
I_C	DC collector current (DC)		–	250	mA
P_{tot}	total power dissipation	$T_{mb} \leq 75^\circ\text{C}$	–	4	W
T_{stg}	storage temperature		–65	+200	$^\circ\text{C}$
T_j	operating junction temperature		–	200	$^\circ\text{C}$
T_{sld}	soldering temperature	up to 0.3 mm from case; $t \leq 10 \text{ s}$	–	235	$^\circ\text{C}$

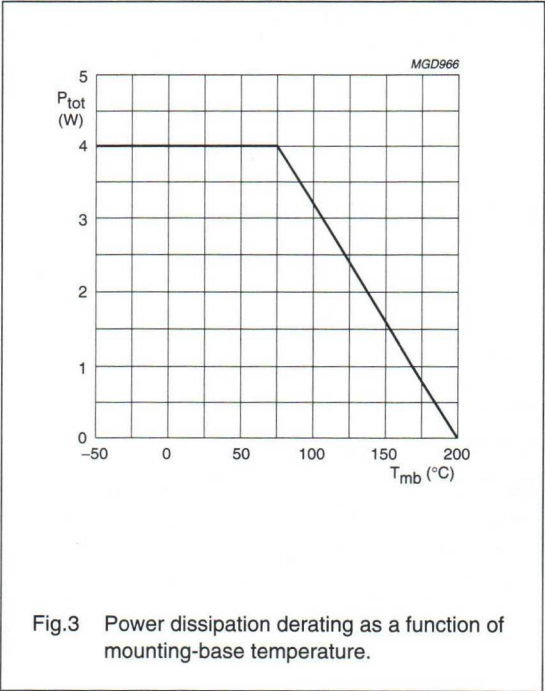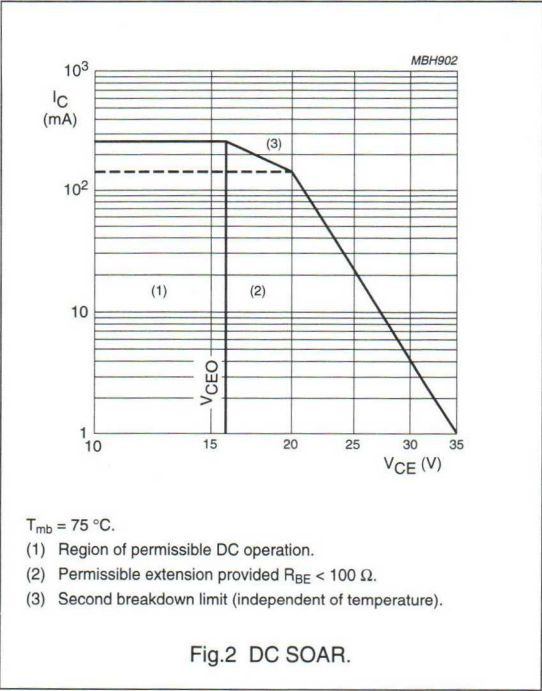

NPN microwave power transistor

LTE21009R

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	$T_{mb} = 25\ ^\circ\text{C}$	36	K/W
$R_{th\ mb-h}$	thermal resistance from mounting base to heatsink	note 1	0.7	K/W

Note

1. See "Mounting recommendations in the General part of handbook SC15".

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 20\ \text{V}; I_E = 0$	–	50	μA
		$V_{CB} = 40\ \text{V}; I_E = 0$	–	0.4	mA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\ \text{V}; I_C = 0$	–	200	nA
h_{FE}	DC current gain	$V_{CE} = 5\ \text{V}; I_C = 150\ \text{mA}$	15	150	

NPN microwave power transistor

LTE21015R

FEATURES

- Interdigitated structure provides high emitter efficiency
- Diffused emitter ballasting resistors provide excellent current sharing and withstanding a high VSWR
- Gold metallization realizes very stable characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance
- Input matching cell allows an easier design of circuits.

APPLICATIONS


- Common emitter class-A linear power amplifiers up to 2 GHz.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT440A metal ceramic flange package with the emitter connected to the flange.

PINNING - SOT440A

PIN	DESCRIPTION
1	collector
2	base
3	emitter connected to flange

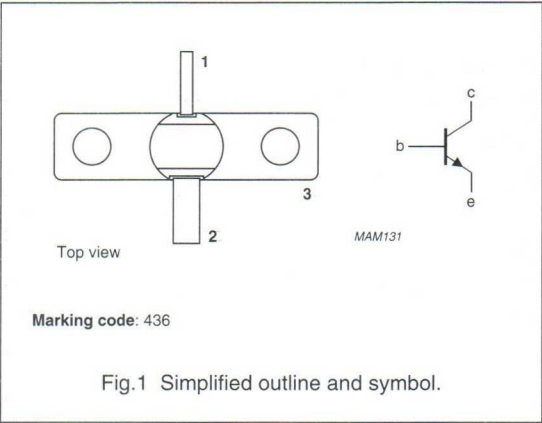

QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common emitter class-A amplifier.

MODE OF OPERATION	f (GHz)	V_{CE} (V)	I_C (mA)	P_{L1} (W)	G_{po} (dB)	$Z_i; Z_L$ (Ω)
Class-A	2	16	250	≥ 1.5	≥ 8.5	see Figs 6 and 7

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.



NPN microwave power transistor

LTE21015R

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	—	40	V
V_{CER}	collector-emitter voltage	$R_{BE} = 250\ \Omega$	—	20	V
V_{CEO}	collector-emitter voltage	open base	—	16	V
V_{EBO}	emitter-base voltage	open collector	—	3	V
I_C	collector current (DC)		—	450	mA
P_{tot}	total power dissipation	$T_{mb} \leq 75\ ^\circ\text{C}$	—	7.5	W
T_{stg}	storage temperature		-65	+200	$^\circ\text{C}$
T_j	operating junction temperature		—	200	$^\circ\text{C}$
T_{sld}	soldering temperature	up to 0.2 mm from ceramic; $t \leq 10\text{ s}$	—	235	$^\circ\text{C}$

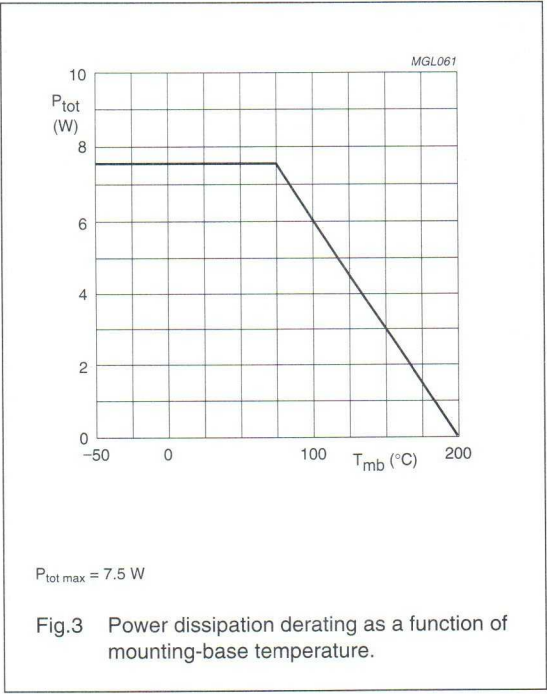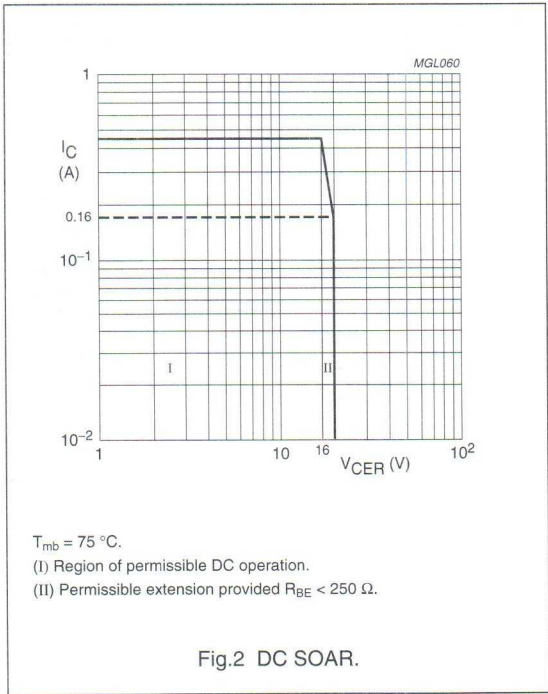

NPN microwave power transistor

LTE21015R

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting-base	$T_j = 70\ ^\circ\text{C}$	12	K/W
$R_{th\ mb-h}$	thermal resistance from mounting-base to heatsink	note1	0.7	K/W

Note

1. See "Mounting recommendations in the General part of handbook SC15".

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 20\ \text{V}; I_E = 0$	—	150	μA
		$V_{CB} = 40\ \text{V}; I_E = 0$	—	1	mA
I_{CER}	collector cut-off current	$V_{CE} = 20\ \text{V}; R_{BE} = 270\ \Omega$	—	0.5	mA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\ \text{V}; I_C = 0$	—	1.5	μA
h_{FE}	DC current gain	$V_{CE} = 5\ \text{V}; I_C = 250\ \text{mA}$	15	150	

APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ in a common emitter class-A test circuit.(see Fig.4)


MODE OF OPERATION	f (GHz)	V_{CC} (V) ⁽¹⁾	I_C (mA) ⁽¹⁾	P_{L1} (W) ⁽²⁾	G_{po} (dB) ⁽³⁾	$Z_i; Z_L$ (Ω)
Class-A (CW)	2	16	250	≥ 1.5 typ. 1.8	≥ 8.5 typ. 9.5	see Figs 6 and 7

Notes

1. I_C and V_{CE} regulated.
2. Load power for 1 dB compression of gain.
3. Linear gain.


NPN microwave power transistor

LTE21015R

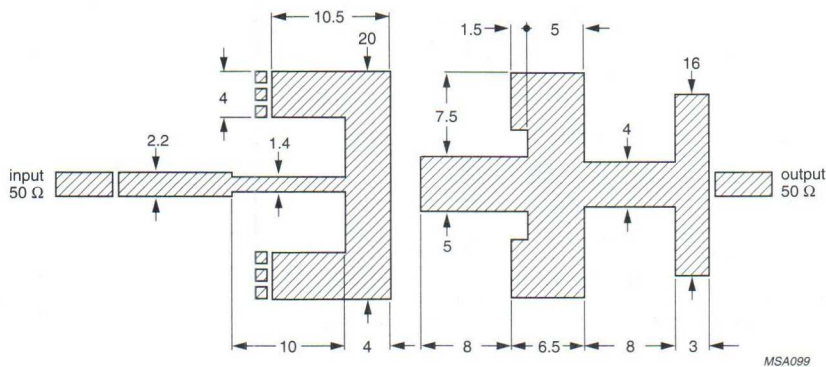

Dimensions in mm.
 Substrate: Teflon fibreglass.
 Thickness: 0.8 mm.
 Permittivity: $\epsilon_r = 2.55$.

Fig.4 Narrowband test circuit.

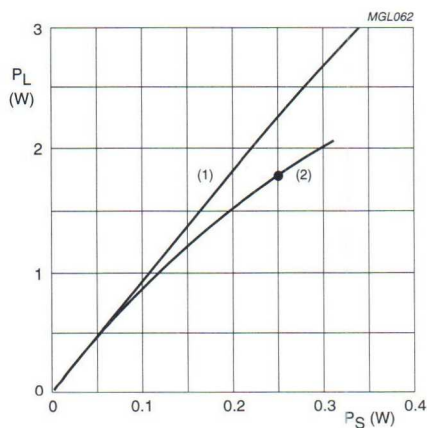


$V_{CE} = 16$ V; $I_C = 250$ mA (regulated).
 In narrowband test circuit as shown in Fig.4
 (1) $G_{p0} = 9.5$ dB.
 (2) $P_{L1} = 1.8$ W.

Fig.5 Load power as a function of source power.


NPN microwave power transistor

LTE21015R

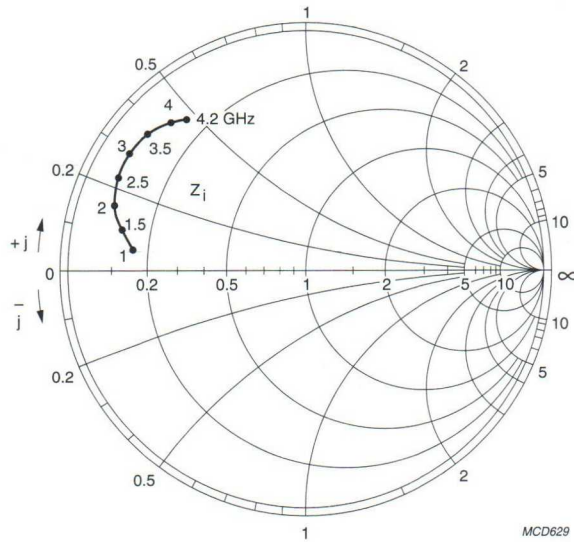

$V_{CE} = 16 \text{ V}$; $Z_0 = 50 \Omega$; $I_C = 250 \text{ mA}$.

Fig.6 Input impedance as a function of frequency for P_{L1} ; associated with optimum load impedance.

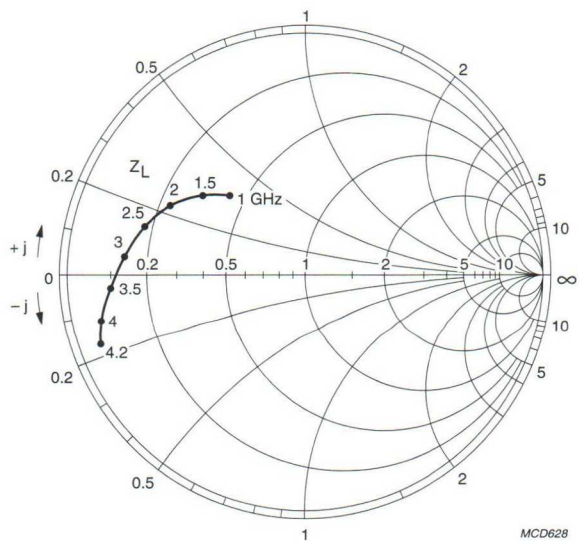

$V_{CE} = 16 \text{ V}$; $Z_0 = 50 \Omega$; $I_C = 250 \text{ mA}$.

Fig.7 Optimum load impedance as a function of frequency for P_{L1} ; associated with input impedance.

NPN microwave power transistor

LTE21025R

FEATURES

- Diffused emitter ballasting resistors provide excellent current sharing and withstanding a high VSWR
- Self-aligned process entirely ion implanted
- Gold metallization realizes very stable characteristics and excellent lifetime
- Input matching cell improves input impedance and allows an easier design of wideband circuits.

APPLICATIONS


- Common emitter class-A linear power amplifiers up to 4.2 GHz.

DESCRIPTION


NPN silicon planar epitaxial microwave power transistor in a SOT440A metal ceramic flange package with the emitter connected to the flange.

PINNING - SOT440A

PIN	DESCRIPTION
1	collector
2	base
3	emitter connected to flange



Top view



MAM131

Marking code: 439

Fig.1 Simplified outline and symbol.

QUICK REFERENCE DATA

RF performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common emitter class-A test circuit.

MODE OF OPERATION	f (GHz)	V _{CE} (V)	I _C (mA)	P _{L1} (W)	G _{po} (dB)
Class-A (CW)	2.1	16	400	typ. 2.8	typ. 7.8

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.



NPN microwave power transistor

LTE21025R

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	–	40	V
V_{CER}	collector-emitter voltage	$R_{BE} = 70 \Omega$	–	20	V
V_{CEO}	collector-emitter voltage	open base	–	16	V
V_{EBO}	emitter-base voltage	open collector	–	3	V
I_C	collector current (DC)		–	800	mA
P_{tot}	total power dissipation	$T_{mb} \leq 75^\circ\text{C}$	–	8	W
T_{stg}	storage temperature		–65	+200	$^\circ\text{C}$
T_j	operating junction temperature		–	200	$^\circ\text{C}$
T_{sld}	soldering temperature	at 0.3 mm from ceramic; $t \leq 10 \text{ s}$	–	235	$^\circ\text{C}$

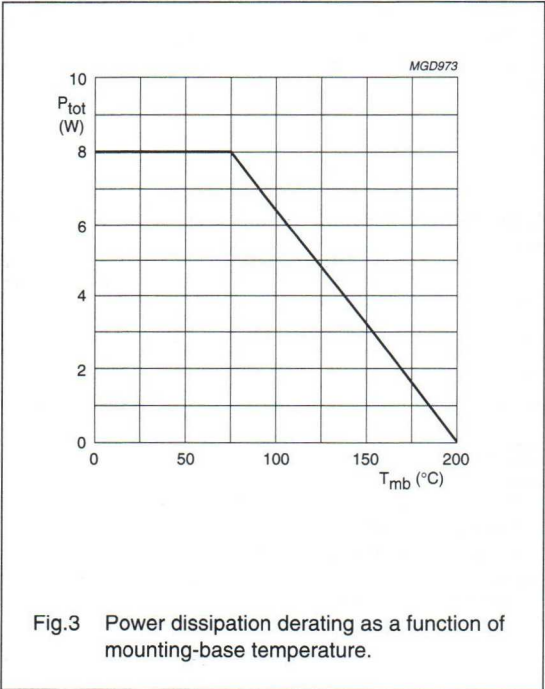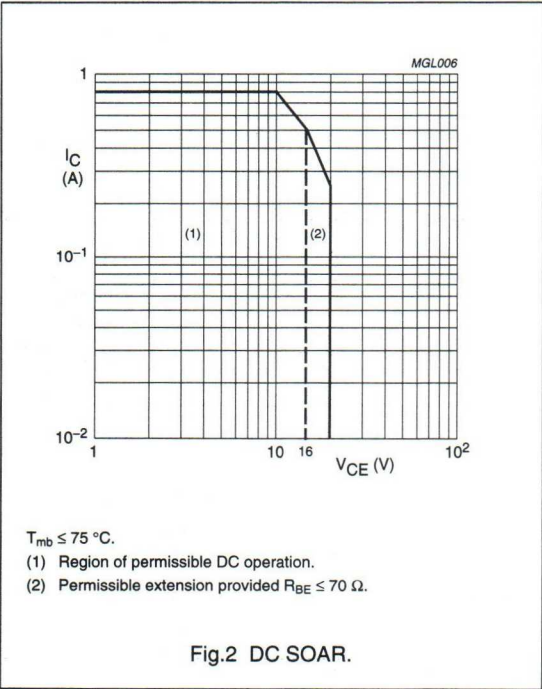

NPN microwave power transistor

LTE21025R

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting-base	$T_j = 75\ ^\circ\text{C}$	10	K/W
$R_{th\ mb-h}$	thermal resistance from mounting-base to heatsink	$T_j = 75\ ^\circ\text{C}$; note 1	0.7	K/W

Note

1. See "Mounting recommendations in the General part of handbook SC15".

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 20\ \text{V}; I_E = 0$	–	–	225	μA
		$V_{CB} = 40\ \text{V}; I_E = 0$	–	–	1.5	mA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\ \text{V}; I_C = 0$	–	–	0.6	μA
h_{FE}	DC current gain	$V_{CE} = 5\ \text{V}; I_C = 400\ \text{mA}$	15	–	150	
C_{cb}	collector-base capacitance	$V_{CB} = 16\ \text{V}; V_{EB} = 1.5\ \text{V};$ $I_E = I_C = 0; f = 1\ \text{MHz}$	–	3	–	pF
C_{ce}	collector-emitter capacitance	$V_{CE} = 16\ \text{V}; V_{EB} = 1.5\ \text{V};$ $I_E = I_C = 0; f = 1\ \text{MHz}$	–	1.5	–	pF
C_{eb}	emitter-base capacitance	$V_{CB} = 10\ \text{V}; V_{EB} = 1\ \text{V};$ $I_C = I_E = 0; f = 1\ \text{MHz}$	–	28	–	pF

NPN microwave power transistor

LTE21025R

Table 1 Scattering parameters: $V_{CE} = 16\text{ V}$; $I_C = 400\text{ mA}$ (V_{CE} and I_C regulated); $T_{mb} = 25\text{ }^{\circ}\text{C}$; $Z_o = 50\text{ }\Omega$; typical values. (The figures given between brackets are values in dB).

f (MHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAGNITUDE (ratio)	ANGLE (deg)	MAGNITUDE (ratio)	ANGLE (deg)	MAGNITUDE (ratio)	ANGLE (deg)	MAGNITUDE (ratio)	ANGLE (deg)
500	0.94	176	0.017 (−35.4)	43	2.79 (8.9)	81	0.49	−173
600	0.94	174	0.018 (−34.7)	46	2.39 (7.6)	77	0.54	−173
700	0.94	173	0.019 (−34.4)	47	2.07 (6.3)	72	0.52	−176
800	0.93	172	0.020 (−34.1)	49	1.85 (5.3)	68	0.52	−177
900	0.93	170	0.021 (−33.8)	49	1.66 (4.4)	64	0.53	−179
1000	0.93	168	0.022 (−33.3)	50	1.50 (3.5)	60	0.53	179
1100	0.92	167	0.023 (−32.6)	50	1.39 (2.9)	57	0.53	179
1200	0.93	166	0.026 (−31.6)	50	1.31 (2.4)	53	0.54	177
1300	0.93	164	0.029 (−30.6)	49	1.23 (1.8)	49	0.54	176
1400	0.93	167	0.032 (−29.9)	54	1.16 (1.3)	48	0.55	179
1500	0.93	163	0.037 (−28.7)	54	1.11 (0.9)	43	0.54	176
1600	0.93	162	0.040 (−27.9)	53	1.07 (0.6)	39	0.55	175
1700	0.93	161	0.042 (−27.5)	51	1.03 (0.3)	35	0.55	176
1800	0.92	159	0.043 (−27.3)	49	0.99 (−0.1)	30	0.56	174
2000	0.88	151	0.046 (−26.7)	46	0.99 (−0.1)	22	0.56	170
2200	0.89	148	0.052 (−25.7)	43	0.92 (−0.7)	14	0.57	168
2400	0.90	147	0.059 (−24.6)	41	0.88 (−1.1)	9	0.58	168
2600	0.90	147	0.069 (−23.2)	38	0.90 (−0.9)	1	0.59	168
2800	0.87	142	0.073 (−22.8)	32	0.88 (−1.1)	−8	0.60	169
3000	0.83	134	0.075 (−22.5)	26	0.90 (−0.9)	−18	0.61	168
3200	0.82	129	0.077 (−22.2)	21	0.87 (−1.2)	−27	0.63	166
3400	0.83	130	0.085 (−21.4)	18	0.90 (−1.0)	−37	0.65	165
3600	0.80	130	0.091 (−20.8)	11	0.91 (−0.8)	−50	0.69	165
3800	0.73	127	0.091 (−20.8)	3	0.94 (−0.5)	−64	0.74	164
4000	0.69	122	0.087 (−21.2)	−7	0.95 (−0.5)	−82	0.79	162
4200	0.67	122	0.078 (−22.2)	−15	0.89 (−1.0)	−100	0.84	157
4400	0.69	126	0.071 (−23.0)	−19	0.83 (−1.7)	−121	0.89	150
4600	0.72	130	0.059 (−24.6)	−18	0.70 (−3.1)	−141	0.92	143
4800	0.76	128	0.054 (−25.4)	−11	0.60 (−4.4)	−160	0.94	136

NPN microwave power transistor

LTE42005S

FEATURES

- Diffused emitter ballasting resistors provide excellent current sharing and withstanding a high VSWR
- Gold metallization realizes very stable characteristics and excellent lifetime
- Input matching cell improves input impedance and allows an easier design of circuits

APPLICATION


- Common emitter class-A linear power amplifiers up to 4.2 GHz.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT440A metal ceramic flange package with the emitter connected to the flange.

PINNING - SOT440A

PIN	DESCRIPTION
1	collector
2	base
3	emitter connected to flange

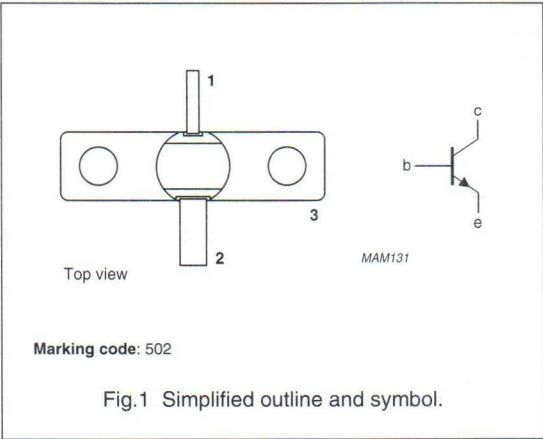

QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common emitter class-A amplifier.

MODE OF OPERATION	f (GHz)	V_{CE} (V)	I_C (mA)	P_{L1} (mW)	G_{po} (dB)	Z_i (Ω)	Z_L (Ω)
Class-A (CW) linear	4.2	18	110	≥ 450	≥ 6.6	$100 + j40$	$4 + j4$

WARNING
Product and environmental safety - toxic materials
This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.


NPN microwave power transistor

LTE42005S

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	—	40	V
V_{CER}	collector-emitter voltage	$R_{BE} = 100\ \Omega$	—	35	V
V_{CEO}	collector-emitter voltage	open base	—	16	V
V_{EBO}	emitter-base voltage	open collector	—	3	V
I_C	collector current (DC)		—	250	mA
P_{tot}	total power dissipation	$T_{mb} \leq 75\ ^\circ\text{C}$	—	4	W
T_{stg}	storage temperature		-65	+200	$^\circ\text{C}$
T_j	operating junction temperature		—	200	$^\circ\text{C}$
T_{slid}	soldering temperature	at 0.3 mm from case; $t = 10\text{ s}$	—	235	$^\circ\text{C}$

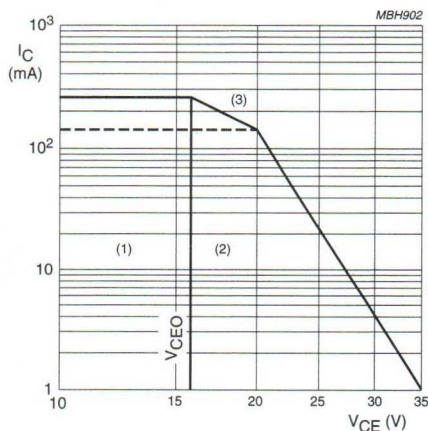 $T_{mb} \leq 75\ ^\circ\text{C}$.

- (1) Region of permissible DC operation.
 (2) Permissible extension provided $R_{BE} \leq 100\ \Omega$.
 (3) Second breakdown limit (independent of temperature).

Fig.2 DC SOAR.

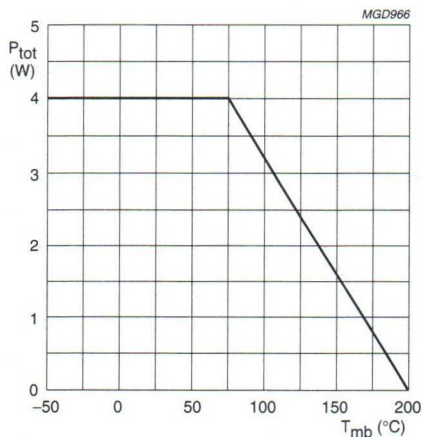


Fig.3 Power dissipation derating as a function of mounting-base temperature.

NPN microwave power transistor

LTE42005S

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting-base	$T_j = 75\ ^\circ\text{C}$	36	K/W
$R_{th\ mb-h}$	thermal resistance from mounting-base to heatsink	$T_j = 75\ ^\circ\text{C}$; note 1	0.7	K/W

Note

1. See "Mounting recommendations in the General part of handbook SC15".

CHARACTERISTICS

 $T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 20\ \text{V}; I_E = 0$	–	–	0.1	μA
		$V_{CB} = 40\ \text{V}; I_E = 0$	–	–	0.25	mA
I_{CER}	emitter cut-off current	$V_{CE} = 35\ \text{V}; R_{BE} = 100\ \Omega$	–	–	1	mA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\ \text{V}; I_C = 0$	–	–	0.2	μA
h_{FE}	DC current gain	$V_{CE} = 5\ \text{V}; I_C = 110\ \text{mA}$	15	–	150	
C_{cb}	collector-base capacitance	$V_{CB} = 20\ \text{V}; V_{EB} = 1.5\ \text{V}; I_E = I_C = 0; f = 1\ \text{MHz}$	–	0.5	–	pF
C_{ce}	collector-emitter capacitance	$V_{CE} = 20\ \text{V}; V_{EB} = 1.5\ \text{V}; I_E = I_C = 0; f = 1\ \text{MHz}$	–	1.5	–	pF
C_{eb}	emitter-base capacitance	$V_{CB} = 10\ \text{V}; V_{EB} = 1\ \text{V}; I_C = I_E = 0; f = 1\ \text{MHz}$	–	6.5	–	pF

NPN microwave power transistor

LTE42005S

Table 1 Scattering parameters: $V_{CE} = 18\text{ V}$; $I_C = 110\text{ mA}$ (V_{CE} and I_C regulated); $T_{mb} = 25\text{ °C}$; $Z_0 = 50\text{ }\Omega$; typical values. (The figures given between brackets are values in dB).

f (MHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAGNITUDE (ratio)	ANGLE (deg)	MAGNITUDE (ratio)	ANGLE (deg)	MAGNITUDE (ratio)	ANGLE (deg)	MAGNITUDE (ratio)	ANGLE (deg)
500	0.76	-176	0.022 (-33.2)	37	8.13 (18.2)	85	0.35	-62
600	0.75	180	0.023 (-32.8)	37	6.95 (16.8)	78	0.34	-66
700	0.76	177	0.023 (-32.8)	40	5.95 (15.5)	73	0.34	-71
800	0.76	174	0.024 (-32.5)	41	5.25 (14.4)	67	0.35	-75
900	0.76	171	0.024 (-32.3)	42	4.69 (13.4)	62	0.35	-79
1000	0.75	168	0.026 (-31.8)	43	4.23 (12.5)	57	0.36	-83
1100	0.75	165	0.028 (-31.0)	43	3.88 (11.8)	53	0.37	-87
1200	0.74	163	0.031 (-30.1)	43	3.61 (11.2)	49	0.39	-90
1300	0.75	160	0.035 (-29.2)	43	3.36 (10.5)	44	0.40	-95
1400	0.74	162	0.037 (-28.5)	44	3.12 (9.9)	41	0.43	-98
1500	0.73	157	0.041 (-27.8)	46	2.95 (9.4)	37	0.43	-101
1600	0.73	155	0.045 (-27.0)	46	2.83 (9.0)	32	0.45	-104
1700	0.71	154	0.047 (-26.5)	44	2.70 (8.6)	28	0.47	-107
1800	0.70	151	0.049 (-26.1)	43	2.56 (8.2)	23	0.48	-110
1900	0.69	148	0.050 (-25.9)	42	2.44 (7.7)	19	0.50	-114
2000	0.68	143	0.051 (-25.9)	39	2.34 (7.4)	14	0.51	-116
2200	0.67	138	0.058 (-24.7)	36	2.16 (6.7)	4	0.55	-124
2400	0.65	134	0.067 (-23.5)	34	2.02(6.1)	-2	0.59	-129
2600	0.62	129	0.077 (-22.3)	31	1.95 (5.8)	-12	0.64	-134
2800	0.57	122	0.082 (-21.7)	25	1.84 (5.3)	-21	0.68	-138
3000	0.52	113	0.086 (-21.3)	21	1.78 (5.0)	-32	0.72	-143
3200	0.49	104	0.093 (-20.6)	16	1.67 (4.5)	-42	0.74	-150
3400	0.45	99	0.102 (-19.8)	13	1.62 (4.2)	-52	0.80	-157
3600	0.38	92	0.113 (-18.9)	8	1.52 (3.6)	-64	0.80	-163
3800	0.29	83	0.119 (-18.5)	6	1.43 (3.1)	-76	0.82	-170
4000	0.24	69	0.137 (-17.3)	2	1.27 (2.1)	-88	0.80	-179
4200	0.20	54	0.165 (-15.7)	-5	1.08 (0.7)	-98	0.68	171
4400	0.15	28	0.202 (-13.9)	-20	0.92 (0.8)	-100	0.51	172
4600	0.12	-36	0.206 (-13.7)	-38	0.93 (0.6)	-102	0.52	-174
4800	0.17	-86	0.195 (-14.2)	-52	0.97 (-0.3)	-110	0.63	-171
5000	0.24	-114	0.177 (-15.0)	-65	0.97 (-0.3)	-122	0.73	-174
5200	0.31	-137	0.164 (-15.7)	-73	0.93 (-0.6)	-133	0.79	-180
5400	0.41	-152	0.154 (-16.2)	-83	0.88 (-1.1)	-145	0.83	174
5600	0.48	-161	0.134 (-17.4)	-90	0.81 (-1.8)	-156	0.85	166
5800	0.53	-168	0.122 (-18.2)	-97	0.77 (-2.3)	-167	0.87	160
6000	0.56	-179	0.105 (-19.6)	-104	0.70 (-3.1)	-178	0.89	154

NPN microwave power transistor

LTE42005S


APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common emitter class-A test circuit; note 1.

MODE OF OPERATION	f (GHz)	V _{CE} (V) ⁽²⁾	I _C (mA) ⁽²⁾	P _{L1} (mW) ⁽³⁾	G _{po} (dB) ⁽⁴⁾	Z _i (Ω)	Z _L (Ω)
Class-A (CW)	4.2	18	110	≥450 (26.5) typ. 550 (27.4)	≥6.6 typ. 7.2	100 + j40	4 + j4

Notes

- 1. Circuit consists of prematching circuit boards in combination with complementary input and output slug tuners.
- 2. I_C and V_{CE} regulated.
- 3. Load power for 1 dB compressed power gain.
- 4. Low level power gain associated with P_{L1}.

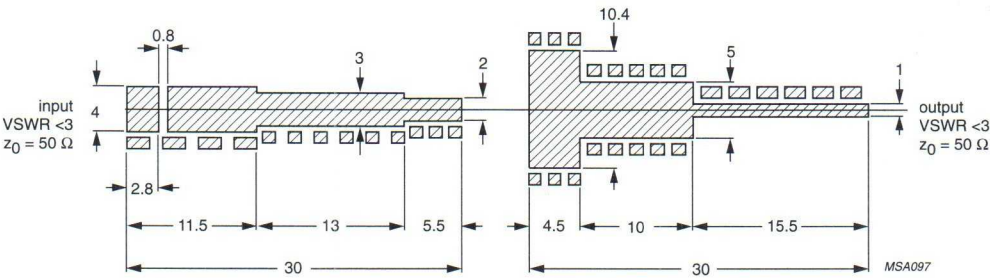


Dimensions in mm.
Input striplines on a double copper-clad printed-circuit board with PTFE fibreglass dielectric ($\epsilon_r = 2.54$); thickness: 1.6 mm.
Output striplines on a double copper-clad Rexolite printed-circuit board with dielectric ($\epsilon_r = 2.4$); thickness: 0.25 mm.

Fig.4 Prematching test circuit board.

NPN microwave power transistor

LTE42005S

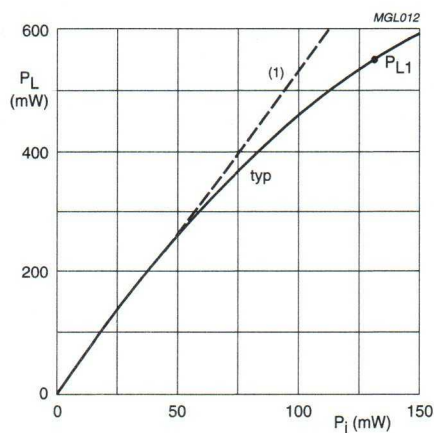

$f = 4.2$ GHz; $T_{mb} = 25$ °C.

$V_{CE} = 18$ V; $I_C = 110$ mA (both regulated).

(1) $G_{p0} = 7.2$ dB.

Fig.5 Load power as a function of input power.

NPN microwave power transistor

LTE42008R

FEATURES

- Diffused emitter ballasting resistors provide excellent current sharing and withstanding a high VSWR
- Gold metallization realizes very stable characteristics and excellent lifetime
- Input matching cell improves input impedance and allows an easier design of circuits.

APPLICATION


- Common emitter class-A linear power amplifiers up to 4.2 GHz.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT440A metal ceramic flange package with the emitter connected to the flange.

PINNING - SOT440A

PIN	DESCRIPTION
1	collector
2	base
3	emitter connected to flange

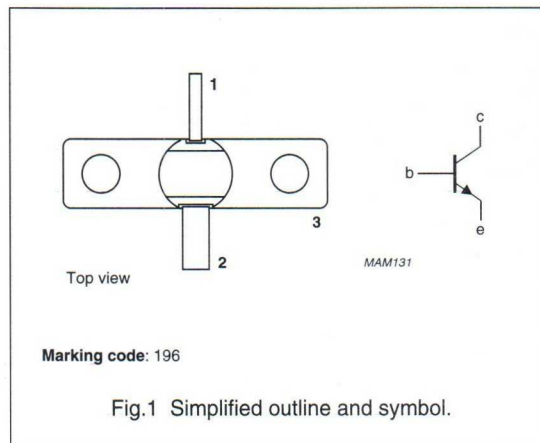

QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common emitter class-A amplifier.

MODE OF OPERATION	f (GHz)	V _{CE} (V)	I _C (mA)	P _{L1} (mW)	G _{po} (dB)	Z _i (Ω)	Z _L (Ω)
Class-A (CW) linear	4.2	16	250	≥800	>7	7.5 + j23.5	2.5 – j9

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.



NPN microwave power transistor

LTE42008R

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V _{CBO}	collector-base voltage	open emitter	—	40	V
V _{CER}	collector-emitter voltage	R _{BE} = 250 Ω	—	20	V
V _{CEO}	collector-emitter voltage	open base	—	16	V
V _{EBO}	emitter-base voltage	open collector	—	3	V
I _C	collector current (DC)		—	450	mA
P _{tot}	total power dissipation	T _{mb} ≤ 75 °C	—	7.5	W
T _{stg}	storage temperature		−65	+200	°C
T _j	operating junction temperature		—	200	°C
T _{slid}	soldering temperature	at 0.3 mm from case; t = 10 s	—	235	°C

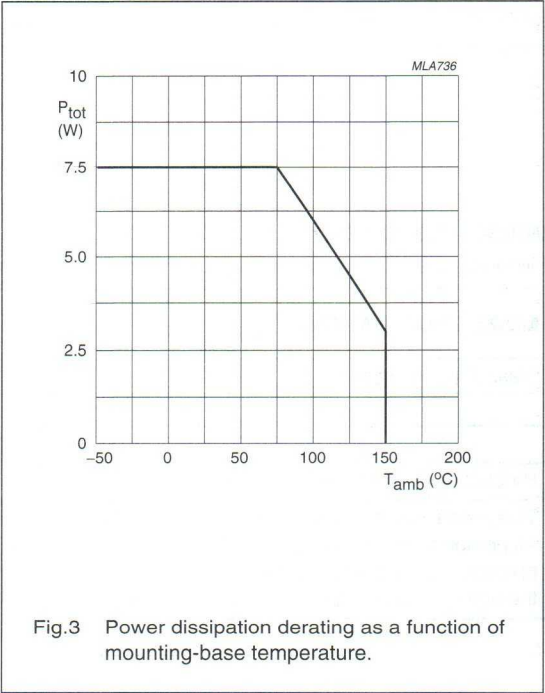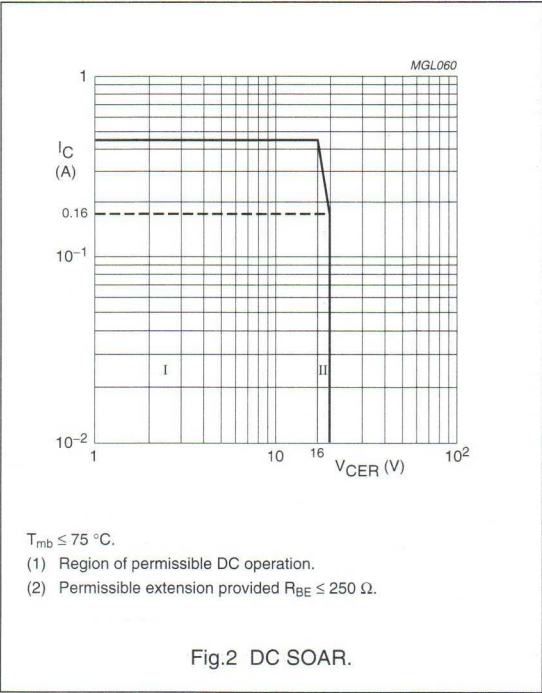

NPN microwave power transistor

LTE42008R

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting-base	$T_j = 70\ ^\circ\text{C}$	12	K/W
$R_{th\ mb-h}$	thermal resistance from mounting-base to heatsink	$T_j = 70\ ^\circ\text{C}$; note 1	0.7	K/W

Note

1. See "Mounting recommendations in the General part of handbook SC15".

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 20\ \text{V}; I_E = 0$	—	—	150	μA
		$V_{CB} = 40\ \text{V}; I_E = 0$	—	—	1	mA
I_{CER}	emitter cut-off current	$V_{CE} = 20\ \text{V}; R_{BE} = 250\ \Omega$	—	—	0.5	mA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\ \text{V}; I_C = 0$	—	—	0.4	μA
h_{FE}	DC current gain	$V_{CE} = 5\ \text{V}; I_C = 250\ \text{mA}$	15	—	150	
C_{cb}	collector-base capacitance	$V_{CB} = 16\ \text{V}; V_{EB} = 1.5\ \text{V};$ $I_E = I_C = 0; f = 1\ \text{MHz}$	—	2	—	pF
C_{ce}	collector-emitter capacitance	$V_{CE} = 16\ \text{V}; V_{EB} = 1.5\ \text{V};$ $I_E = I_C = 0; f = 1\ \text{MHz}$	—	1.5	—	pF
C_{eb}	emitter-base capacitance	$V_{CB} = 10\ \text{V}; V_{EB} = 1\ \text{V};$ $I_C = I_E = 0; f = 1\ \text{MHz}$	—	20	—	pF

NPN microwave power transistor

LTE42008R

Table 1 Common-emitter scattering parameters: $V_{CE} = 16\text{ V}$; $I_C = 250\text{ mA}$; $T_{mb} = 25\text{ °C}$; $Z_o = 50\text{ }\Omega$; typical values

f (MHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAGNITUDE (ratio)	ANGLE (deg)	MAGNITUDE (ratio)	ANGLE (deg)	MAGNITUDE (ratio)	ANGLE (deg)	MAGNITUDE (ratio)	ANGLE (deg)
2000	0.80	160	0.061	61.5	1.40	42.4	0.45	-172.7
2100	0.79	157	0.065	59.4	1.37	38.0	0.44	-173.7
2200	0.79	155	0.068	56.5	1.36	34.0	0.44	-175.5
2300	0.80	153	0.071	54.3	1.35	29.9	0.45	-176.5
2400	0.79	151	0.074	52.2	1.35	25.3	0.45	-176.9
2500	0.79	150	0.079	50.1	1.35	21.1	0.45	-177.6
2600	0.78	148	0.085	48.4	1.34	16.2	0.46	-178.0
2700	0.77	147	0.090	45.1	1.34	11.8	0.47	-178.3
2800	0.75	146	0.095	41.7	1.35	7.6	0.48	-178.6
2900	0.73	144	0.099	38.3	1.38	2.9	0.50	-178.9
3000	0.71	143	0.104	35.4	1.40	-2.6	0.52	-178.8
3100	0.67	143	0.111	31.8	1.42	-8.3	0.55	-179.2
3200	0.64	141	0.116	27.4	1.43	-14.1	0.58	-179.9
3300	0.60	141	0.121	21.7	1.44	-20.4	0.62	178.8
3400	0.56	142	0.124	15.7	1.48	-28.1	0.66	176.9
3500	0.52	143	0.124	11.2	1.49	-36.4	0.70	174.4
3600	0.49	146	0.124	5.2	1.48	-45.1	0.74	171.3
3700	0.47	149	0.122	-2.2	1.47	-53.9	0.79	166.8
3800	0.46	154	0.118	-9.7	1.45	-63.1	0.84	161.9
3900	0.48	159	0.112	-15.7	1.41	-72.9	0.87	156.7
4000	0.51	161	0.106	-22.8	1.34	-82.5	0.91	150.7
4100	0.56	162	0.096	-29.4	1.26	-91.7	0.94	144.8
4200	0.61	161	0.083	-34.5	1.18	-100.1	0.96	138.6
4300	0.67	158	0.068	-37.4	1.08	-108.8	0.97	132.5
4400	0.71	155	0.054	-38.7	0.99	-117.8	0.98	127.3
4500	0.76	152	0.042	-35.4	0.90	-126.5	0.99	122.2
4600	0.79	147	0.031	-26.6	0.81	-134.7	0.99	117.2
4700	0.81	143	0.025	-5.6	0.73	-143.0	0.99	113.7
4800	0.82	140	0.026	28.8	0.66	-151.2	0.99	110.0
4900	0.82	136	0.034	40.1	0.59	-158.8	0.99	106.5
5000	0.82	132	0.043	52.4	0.53	-167.3	0.98	103.2

NPN microwave power transistor

LTE42008R


APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common emitter class-A test circuit; note 1.

MODE OF OPERATION	f (GHz)	V _{CE} (V) ⁽²⁾	I _C (mA) ⁽²⁾	P _{L1} (mW) ⁽³⁾	G _{po} (dB) ⁽⁴⁾	Z _i (Ω)	Z _L (Ω)
Class-A (CW)	4.2	16	250	≥800 (29) typ. 940 (29.7)	≥7 typ. 7.5	7.5 + j40	4 + j4

Notes

- 1. Circuit consists of prematching circuit boards in combination with complementary input and output slug tuners.
- 2. I_C and V_{CE} regulated.
- 3. Load power for 1 dB compressed power gain.
- 4. Low level power gain associated with P_{L1}.

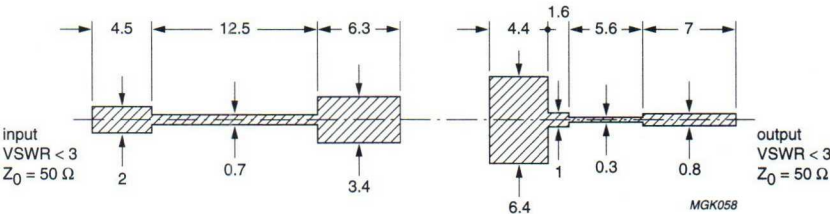


Dimensions in mm.
Input striplines on a double copper-clad printed-circuit board with PTFE fibreglass dielectric ($\epsilon_r = 2.54$); thickness: 1.6 mm.
Output striplines on a double copper-clad Rexolite printed-circuit board with dielectric ($\epsilon_r = 2.4$); thickness: 0.25 mm.

Fig.4 Prematching test circuit board.

NPN microwave power transistor

LTE42008R

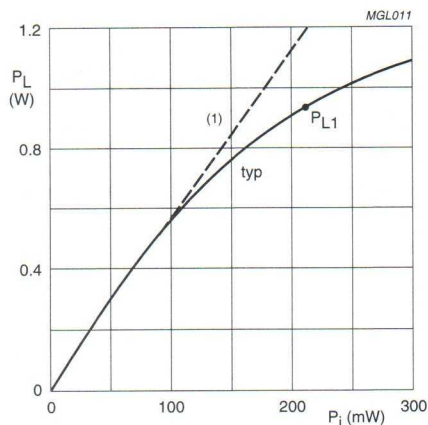

$f = 4.2 \text{ GHz}$; $T_{mb} = 25^\circ\text{C}$.
 $V_{CE} = 16 \text{ V}$; $I_C = 250 \text{ mA}$ (regulated).
 (1) $G_{po} = 7.5 \text{ dB}$.

Fig.5 Load power as a function of input power.



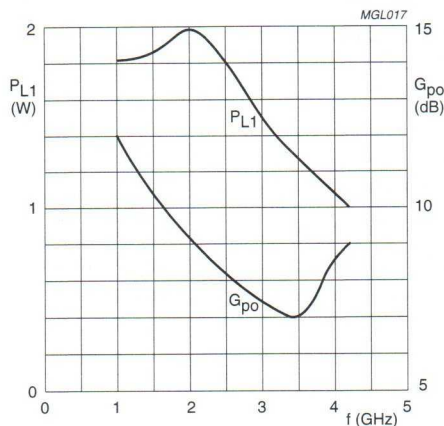


Fig.6 Load power and power gain associated with 1 dB compressed power gain as a function of frequency.

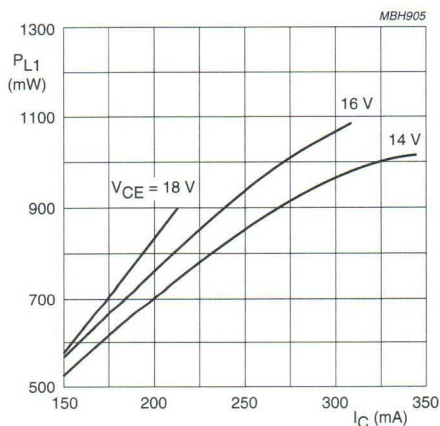

$T_{mb} = 25^\circ\text{C}$; V_{CE} and I_C regulated.

Fig.7 Load power associated with 1 dB compressed power gain as a function of collector current; typical values.

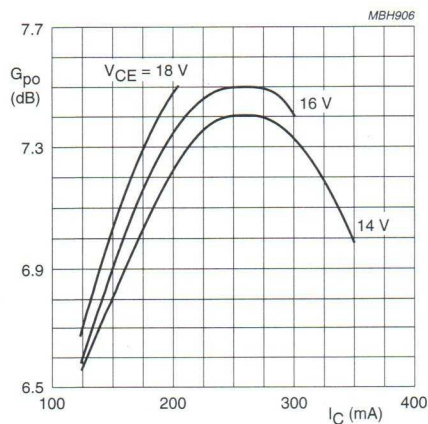


$T_{mb} = 25^\circ\text{C}$; V_{CE} and I_C regulated.

Fig.8 Low level power gain associated with P_{L1} as a function of collector current; typical values.


NPN microwave power transistor

LTE42008R

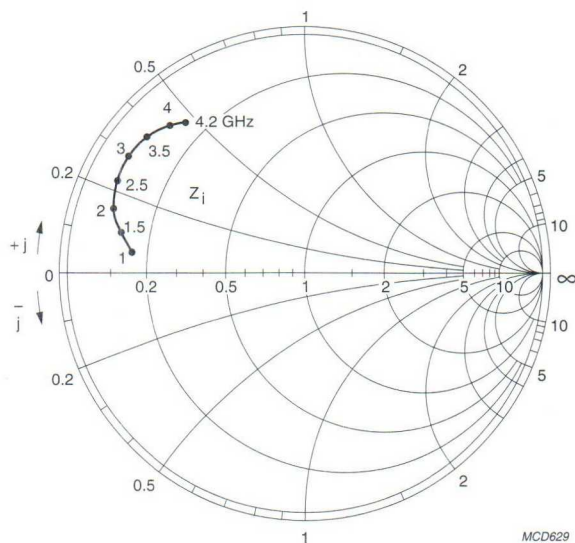

$V_{CE} = 16 \text{ V}$; $I_C = 250 \text{ mA}$ (regulated).
 $Z_0 = 50 \Omega$; $T_{mb} = 25^\circ\text{C}$.

Fig.9 Input impedance as a function of frequency for P_{L1} ; typical values.

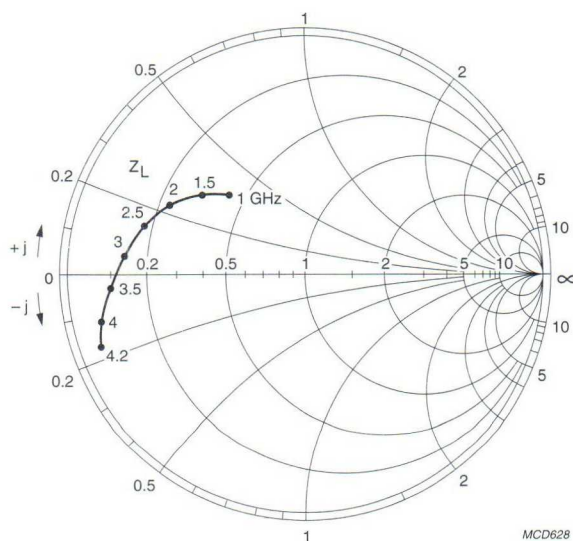

$V_{CE} = 16 \text{ V}$; $I_C = 250 \text{ mA}$ (regulated).
 $Z_0 = 50 \Omega$; $T_{mb} = 25^\circ\text{C}$.

Fig.10 Optimum load impedance as a function of frequency for P_{L1} ; typical values.

NPN microwave power transistor

LTE42012R

FEATURES

- Interdigitated structure provides high emitter efficiency
- Diffused emitter ballasting resistor provides excellent current sharing and withstanding a high VSWR
- Gold metallization realizes very stable characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance
- Input matching cell improves input impedance and allows an easier design of wideband circuits.

APPLICATIONS


- Common emitter class-A power amplifiers up to 4.2 GHz in CW conditions for military and professional applications.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT440A metal ceramic flange package with the emitter connected to the flange.

PINNING - SOT440A

PIN	DESCRIPTION
1	collector
2	base
3	emitter connected to flange

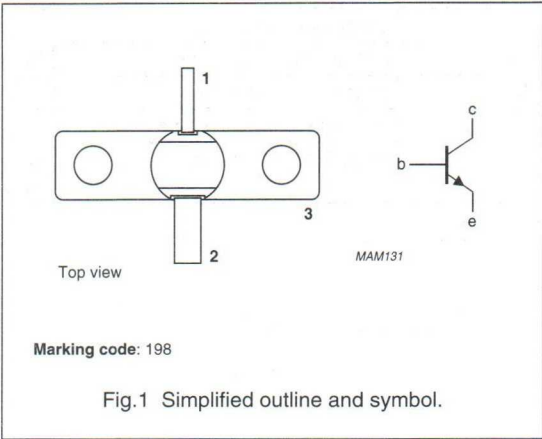

QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common emitter class-A selective amplifier.

MODE OF OPERATION	f (GHz)	V _{CE} (V)	I _C (mA)	P _{L1} (W)	G _{po} (dB)	Z _i (Ω)	Z _L (Ω)
Class-A (CW)	4.2	16	400	≥1	≥6	7.5 + j12	4 - j8

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.



NPN microwave power transistor

LTE42012R

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	—	40	V
V_{CER}	collector-emitter voltage	$R_{BE} = 70\ \Omega$	—	20	V
V_{CEO}	collector-emitter voltage	open base	—	16	V
I_C	collector current (DC)		—	800	mA
P_{tot}	total power dissipation	$T_{mb} \leq 75\ ^\circ\text{C}$	—	8	W
T_{stg}	storage temperature		−65	+200	$^\circ\text{C}$
T_j	operating junction temperature		—	200	$^\circ\text{C}$
T_{sld}	soldering temperature	at 0.1 mm from ceramic; $t \leq 10\text{ s}$	—	235	$^\circ\text{C}$

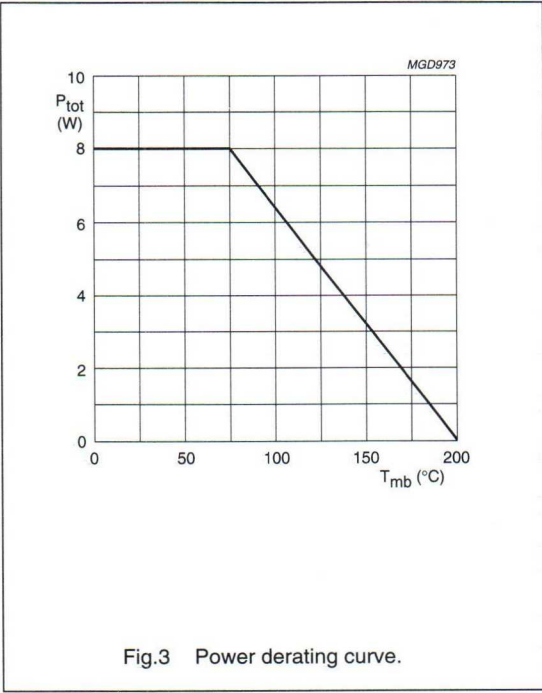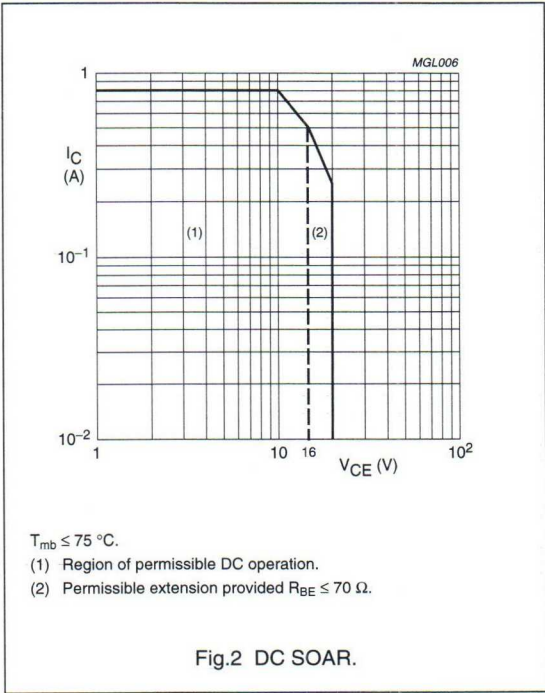

NPN microwave power transistor

LTE42012R

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting-base	$T_j = 75\ ^\circ\text{C}$	10	K/W
$R_{th\ mb-h}$	thermal resistance from mounting-base to heatsink	$T_j = 75\ ^\circ\text{C}$; note 1	0.7	K/W

Note

1. See "Mounting recommendations in the General part of handbook SC15".

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 20\ \text{V}; I_E = 0$	—	—	200	μA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\ \text{V}; I_C = 0$	—	—	600	nA
h_{FE}	DC current gain	$V_{CE} = 5\ \text{V}; I_C = 400\ \text{mA}$	15	—	100	
C_{cb}	collector-base capacitance	$V_{CB} = 16\ \text{V}; V_{EB} = 1.5\ \text{V};$ $I_E = I_C = 0; f = 1\ \text{MHz}$	—	3	—	pF
C_{ce}	collector-emitter capacitance	$V_{CE} = 16\ \text{V}; V_{EB} = 1.5\ \text{V};$ $I_E = I_C = 0; f = 1\ \text{MHz}$	—	1.5	—	pF
C_{eb}	emitter-base capacitance	$V_{CB} = 10\ \text{V}; V_{EB} = 1\ \text{V};$ $I_C = I_E = 0; f = 1\ \text{MHz}$	—	28	—	pF

NPN microwave power transistor

LTE42012R

Table 1 Common-emitter scattering parameters: $V_{CE} = 16\text{ V}$; $I_C = 400\text{ mA}$; $T_{mb} = 25\text{ °C}$; $Z_0 = 50\text{ }\Omega$; typical values.

f (MHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAGNITUDE (ratio)	ANGLE (deg)	MAGNITUDE (ratio)	ANGLE (deg)	MAGNITUDE (ratio)	ANGLE (deg)	MAGNITUDE (ratio)	ANGLE (deg)
2000	0.84	163	0.049	64	0.96	47.2	0.60	179.3
2100	0.84	161	0.051	62.7	0.94	43.3	0.59	178.0
2200	0.84	159	0.054	60.4	0.93	39.8	0.59	175.6
2300	0.85	158	0.055	58.8	0.91	36.2	0.59	174.2
2400	0.85	156	0.057	57.5	0.91	32.2	0.60	172.6
2500	0.85	155	0.060	56.1	0.90	29.1	0.60	171.1
2600	0.85	154	0.064	54.9	0.89	24.6	0.60	169.8
2700	0.85	153	0.067	53.1	0.89	21.2	0.60	168.6
2800	0.85	152	0.071	51.3	0.89	17.2	0.61	167.1
2900	0.84	150	0.073	49.5	0.90	13.8	0.62	165.7
3000	0.83	149	0.076	48.0	0.90	9.3	0.62	164.7
3100	0.82	149	0.080	46.0	0.91	5.2	0.63	163.8
3200	0.80	147	0.084	44.1	0.92	0.6	0.64	163.0
3300	0.78	146	0.088	40.5	0.93	-4.3	0.65	161.5
3400	0.76	145	0.091	36.1	0.95	-9.7	0.67	160.9
3500	0.74	144	0.093	34.4	0.97	-16.1	0.69	159.6
3600	0.71	143	0.095	30.7	0.98	-23.2	0.70	158.3
3700	0.70	142	0.095	26.3	0.99	-30.6	0.73	156.2
3800	0.67	142	0.093	21.6	0.99	-37.9	0.76	153.6
3900	0.66	142	0.091	17.0	1.00	-46.6	0.79	150.7
4000	0.64	142	0.088	13.2	0.98	-55.8	0.82	147.0
4100	0.64	142	0.084	9.7	0.95	-64.9	0.85	143.1
4200	0.65	143	0.077	7.0	0.91	-73.8	0.88	138.4
4300	0.67	143	0.068	5.9	0.86	-82.6	0.90	133.6
4400	0.69	143	0.060	8.2	0.81	-92.3	0.93	129.3
4500	0.72	141	0.054	13.8	0.74	-101.7	0.94	124.9
4600	0.75	139	0.050	20.5	0.68	-110.6	0.95	120.1
4700	0.76	137	0.050	31.2	0.61	-119.7	0.96	116.5
4800	0.78	135	0.054	43.5	0.56	-129.1	0.97	113.5
4900	0.79	133	0.061	46.6	0.50	-139.5	0.97	110.1
5000	0.77	130	0.068	54.3	0.44	-148.6	0.97	106.7

NPN microwave power transistor

LTE42012R


APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common emitter class-A selective circuit; note 1.

MODE OF OPERATION	f (GHz)	V _{CE} (V)	I _C (mA)	P _{L1} (W)	G _{po} (dB)	Z _i (Ω)	Z _L (Ω)
Class-A	4.2	16	400	>1 typ. 1.25	>6 typ. 7	7.5 + j12	4 - j8

Note

1. Circuit consists of prematching circuit boards in combination with complementary input and output slug tuners.

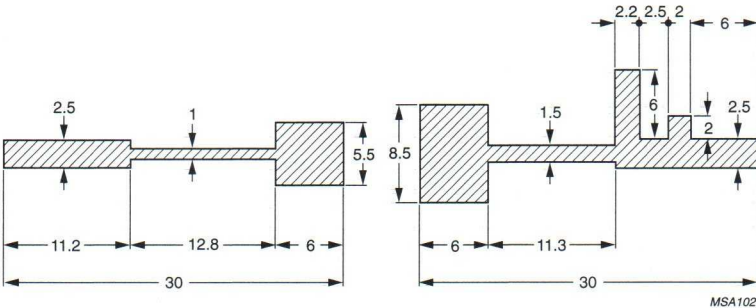


Dimensions in mm.
Input striplines on a double copper-clad printed-circuit board with PTFE fibreglass dielectric ($\epsilon_r = 2.54$); thickness: 0.8 mm.

Fig.4 Prematching test circuit board.

NPN microwave power transistor


LTE42012R

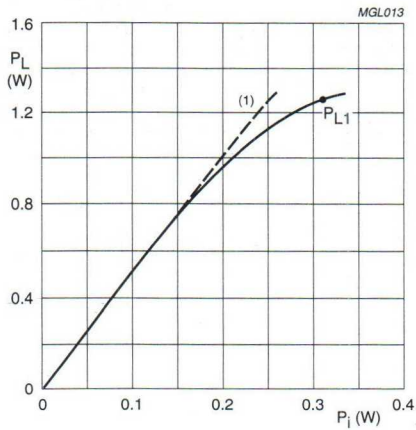

$f = 4.2$ GHz; $V_{CE} = 16$ V; $I_C = 400$ mA (regulated).

(1) $G_{po} = 7$ dB.

Fig.5 Load power as a function of input power.

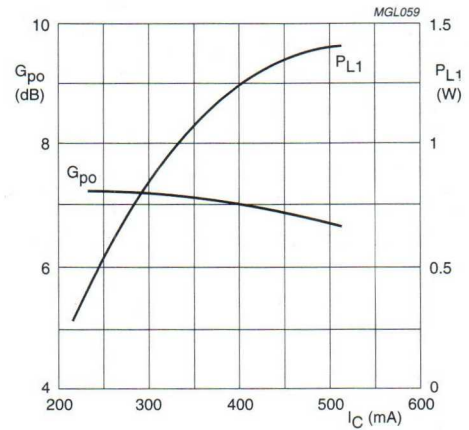

$f = 4.2$ GHz; $V_{CE} = 16$ V.

Fig.6 Low level power gain associated with P_{L1} as a function of collector current.

NPN microwave power transistor

LV1721E50R

FEATURES

- Interdigitated structure provides high emitter efficiency
- Diffused emitter ballasting resistor provides excellent current sharing and withstanding a high VSWR
- Gold metallization realizes very stable characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance
- Internal input and output prematching ensures good stability and allows an easier design of wideband circuits.

APPLICATIONS


- Common emitter class-A amplifiers in CW conditions for military and professional applications in the 1.7 GHz to 2.1 GHz band.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT445A metal ceramic flange package with the emitter connected to the flange.

PINNING - SOT445A

PIN	DESCRIPTION
1	collector
2	base
3	emitter connected to flange

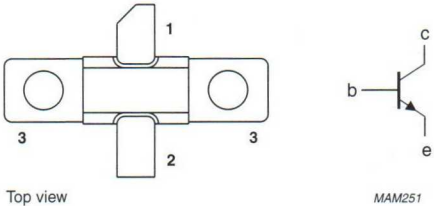

Top view

Marking code: 1721E50R

Fig.1 Simplified outline and symbol.

QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common emitter class-A wideband amplifier.

MODE OF OPERATION	f (GHz)	V_{CE} (V)	I_C (A)	P_{L1} (W)	G_{po} (dB)	$Z_i; Z_L$ (Ω)
Class-A (CW)	1.7 to 2.1	16	1.1	≥ 5	≥ 7	see Fig 6

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.



NPN microwave power transistor

LV1721E50R

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V _{CBO}	collector-base voltage	open emitter	–	40	V
V _{CER}	collector-emitter voltage	R _{BE} = 47 Ω	–	20	V
V _{CEO}	collector-emitter voltage	open base	–	15	V
V _{EBO}	emitter-base voltage	open collector	–	3	V
I _C	collector current (DC)		–	2	A
P _{tot}	total power dissipation	T _{mb} ≤ 75 °C	–	18	W
T _{stg}	storage temperature		–65	+200	°C
T _j	operating junction temperature		–	200	°C
T _{slid}	soldering temperature	at 0.1 mm from case; t ≤ 10 s	–	235	°C

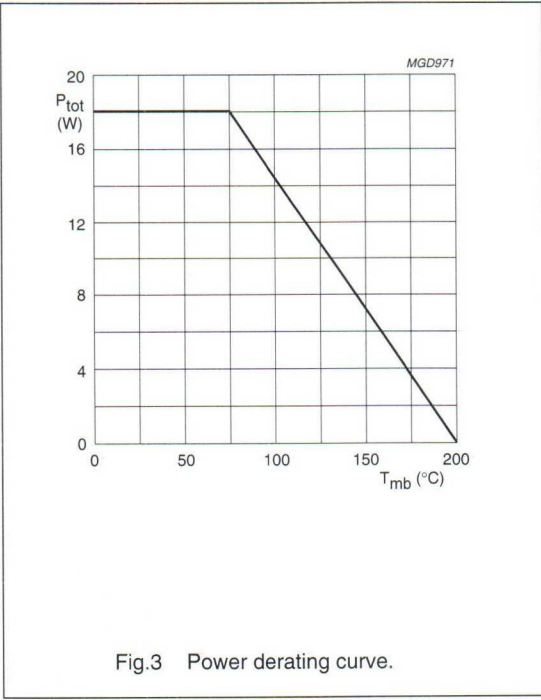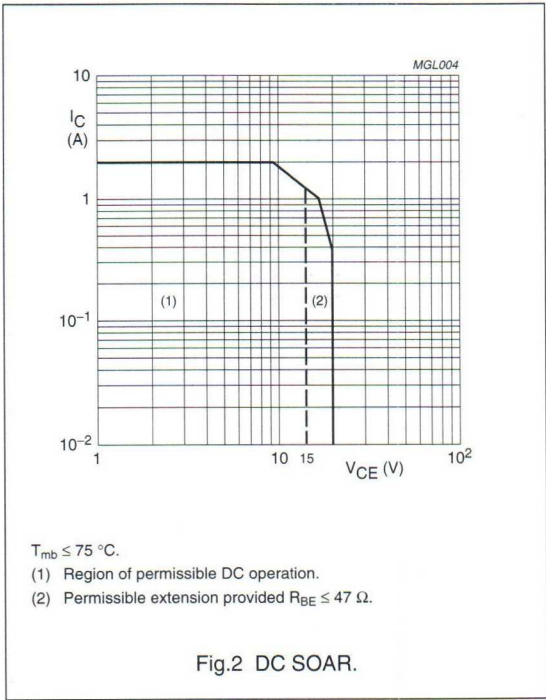

NPN microwave power transistor

LV1721E50R

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting-base	$T_j = 75\ ^\circ\text{C}$	4	K/W
$R_{th\ mb-h}$	thermal resistance from mounting-base to heatsink	$T_j = 75\ ^\circ\text{C}$; note 1	0.7	K/W

Note

- See "Mounting recommendations in the General part of handbook SC15".

CHARACTERISTICS


$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 20\ \text{V}; I_E = 0$	—	—	0.5	mA
		$V_{CB} = 40\ \text{V}; I_E = 0$	—	—	2.5	mA
I_{CER}	collector cut-off current	$V_{CE} = 20\ \text{V}; R_{BE} = 47\ \Omega$	—	—	25	mA
I_{CEO}	collector cut-off current	$V_{CE} = 15\ \text{V}; I_B = 0$	—	—	2	mA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\ \text{V}; I_C = 0$	—	—	100	μA
h_{FE}	DC current gain	$V_{CE} = 3\ \text{V}; I_C = 1\ \text{A}$	15	—	100	

APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ in a common emitter class-A wideband amplifier.

MODE OF OPERATION	f (GHz)	V_{CE} (V)	I_C (A)	P_{L1} (W)	G_{po} (dB)	$Z_i; Z_L$ (Ω)
Class-A (CW)	1.7 to 2.1	16	1.1	≥ 5 ; typ. 5.5	≥ 7 ; typ. 8	see Fig 6

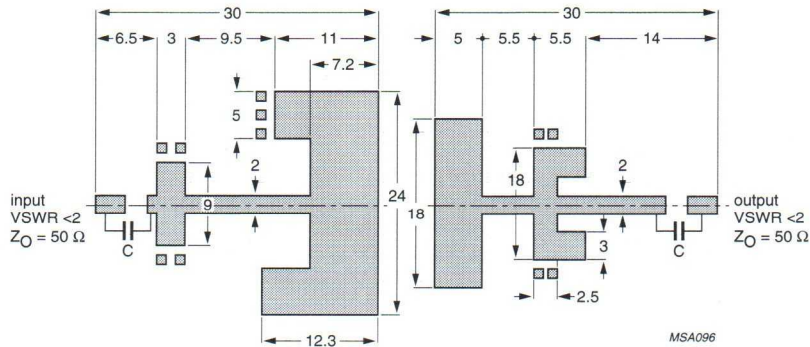

Dimensions in mm.


Striplines on a double copper-clad printed-circuit board with PTFE fiberglass dielectric ($\epsilon_r = 2.5$); thickness: 0.8 mm.

Frequency = 1.7 to 2.1 GHz, CW, class-A application.

Fig.4 Wideband test circuit board.


NPN microwave power transistor

LV1721E50R

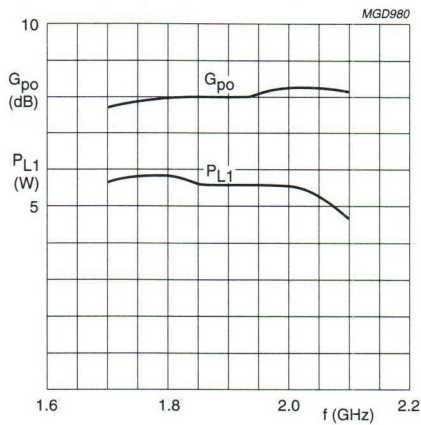

$V_{CE} = 16$ V; $I_C = 1.1$ A (V_{CE} and I_C regulated).

Fig.5 Load power and power gain as functions of frequency.

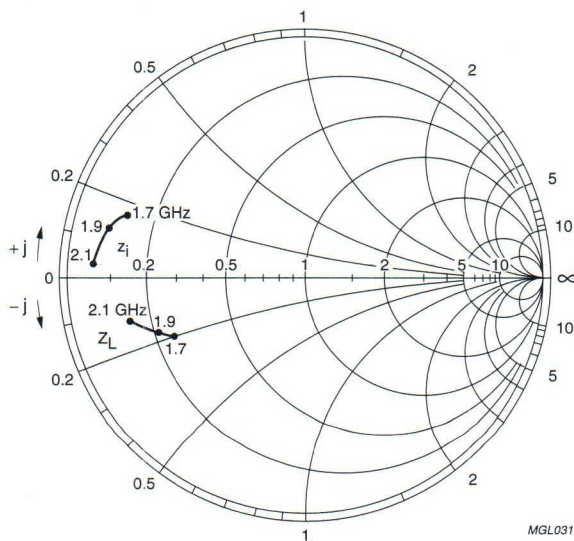

$Z_0 = 50$ Ω ; $P_{L1} = 5.5$ W.

Fig.6 Input and optimum load impedances as functions of frequency; typical values.

NPN microwave power transistor

LV2024E45R

FEATURES

- Interdigitated structure provides high emitter efficiency
- Diffused emitter ballasting resistor provides excellent current sharing and withstanding a high VSWR
- Gold metallization realizes very stable characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance
- Internal input and output prematching ensures good stability and allows an easier design of wideband circuits.

APPLICATIONS


- Common emitter class-A amplifiers in CW conditions for military and professional applications in the 2 to 2.4 GHz band.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT445A metal ceramic flange package with the emitter connected to the flange.

PINNING - SOT445A

PIN	DESCRIPTION
1	collector
2	base
3	emitter connected to flange

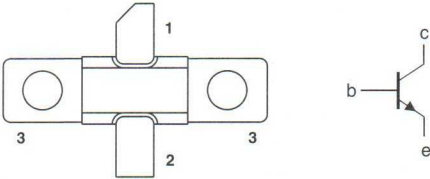

Top view

Marking code: 2024E45R

Fig.1 Simplified outline and symbol.

QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common emitter class-A wideband amplifier.

MODE OF OPERATION	f (GHz)	V _{CE} (V)	I _C (A)	P _{L1} (W)	G _{po} (dB)	Z _i ; Z _L (Ω)
Class-A (CW)	2 to 2.4	16	1.1	≥4	≥6	see Fig 6

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.



NPN microwave power transistor

LV2024E45R

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	—	40	V
V_{CER}	collector-emitter voltage	$R_{BE} = 47\ \Omega$	—	20	V
V_{CEO}	collector-emitter voltage	open base	—	15	V
V_{EBO}	emitter-base voltage	open collector	—	3	V
I_C	collector current (DC)		—	2	A
P_{tot}	total power dissipation	$T_{mb} \leq 75\ ^\circ\text{C}$	—	18	W
T_{stg}	storage temperature		-65	+200	$^\circ\text{C}$
T_j	operating junction temperature		—	200	$^\circ\text{C}$
T_{slid}	soldering temperature	at 0.1 mm from case; $t \leq 10\ \text{s}$	—	235	$^\circ\text{C}$

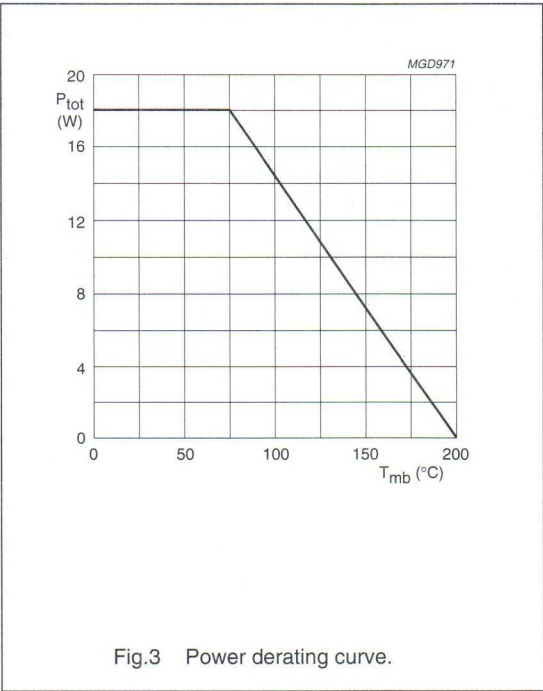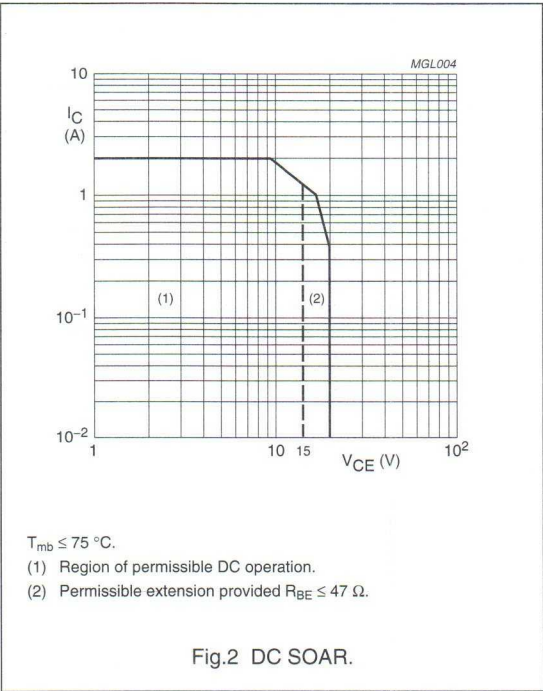

NPN microwave power transistor

LV2024E45R

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting-base	$T_j = 75\ ^\circ\text{C}$	4	K/W
$R_{th\ mb-h}$	thermal resistance from mounting-base to heatsink	$T_j = 75\ ^\circ\text{C}$; note 1	0.7	K/W

Note

1. See "Mounting recommendations in the General part of handbook SC15".

CHARACTERISTICS


$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 20\ \text{V}; I_E = 0$	—	0.5	mA
		$V_{CB} = 40\ \text{V}; I_E = 0$	—	2.5	mA
I_{CER}	collector cut-off current	$V_{CE} = 20\ \text{V}; R_{BE} = 47\ \Omega$	—	25	mA
I_{CEO}	collector cut-off current	$V_{CE} = 15\ \text{V}; I_B = 0$	—	2	mA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\ \text{V}; I_C = 0$	—	100	μA
h_{FE}	DC current gain	$V_{CE} = 3\ \text{V}; I_C = 1\ \text{A}$	15	100	

APPLICATION INFORMATION


Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ in a common emitter class-A wideband amplifier.

MODE OF OPERATION	f (GHz)	V_{CE} (V)	I_C (A)	P_{L1} (W)	G_{po} (dB)	$Z_i; Z_L$ (Ω)
Class-A (CW)	2 to 2.4	16	1.1	≥ 4 ; typ. 5	≥ 6 ; typ. 7	see Fig 6

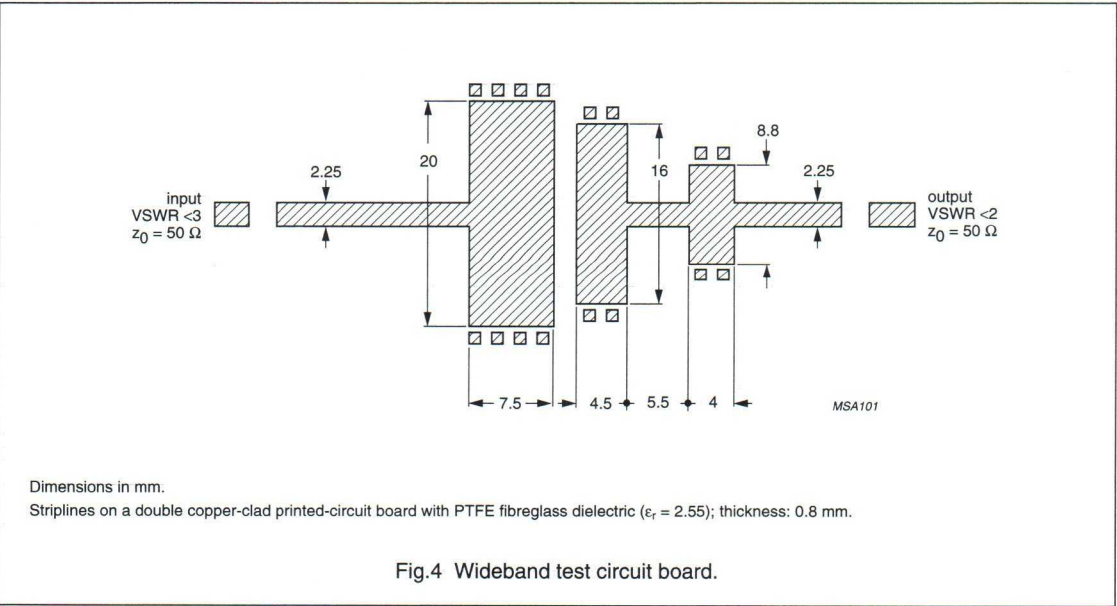


NPN microwave power transistor

LV2024E45R

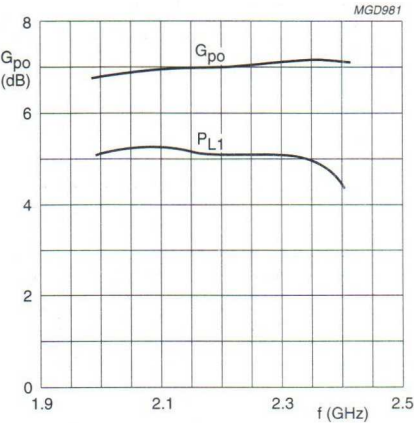

$V_{CE} = 16\text{ V}$; $I_C = 1.1\text{ A}$ (V_{CE} and I_C regulated).

Fig.5 Load power and power gain as functions of frequency.

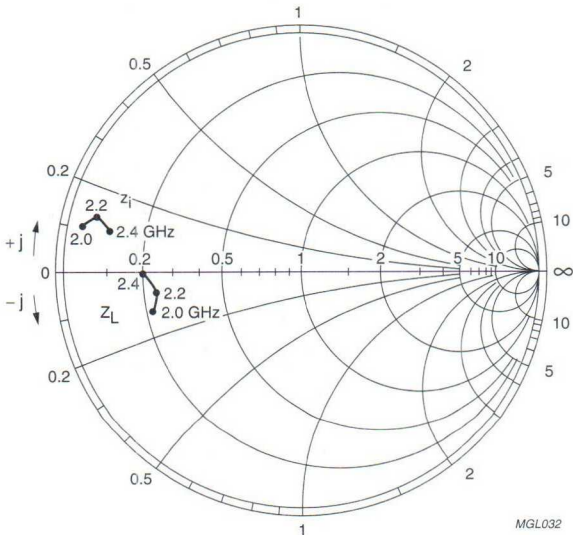

$Z_0 = 50\ \Omega$.

Fig.6 Input and optimum load impedances as functions of frequency; typical values.

NPN microwave power transistor

LV2327E40R

FEATURES

- Interdigitated structure provides high emitter efficiency
- Diffused emitter ballasting resistors providing excellent current sharing and withstanding a high VSWR
- Gold metallization realizes very stable characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance.
- Input and output matching cell improves the impedances and facilitates the design of wideband circuits.

APPLICATIONS

Common emitter class A linear wideband power amplifiers in the 2.3 to 2.7 GHz band.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT445B metal ceramic flange package, with emitter connected to the flange.


QUICK REFERENCE DATA

Microwave performance for $T_{case} = 25\text{ }^{\circ}\text{C}$ in a wideband common-emitter class A circuit.

MODE OF OPERATION	f (MHz)	V _{CE} (V)	I _C (A)	P _{L1} (W)	G _{PO} (dB)	Z _i (Ω)	Z _L (Ω)
CW; linear amplifier	2.3 to 2.7	16	1	≥4	≥7	11 + j3	7.5 - j9

PINNING - SOT445B

PIN	DESCRIPTION
1	collector
2	base
3	emitter connected to flange

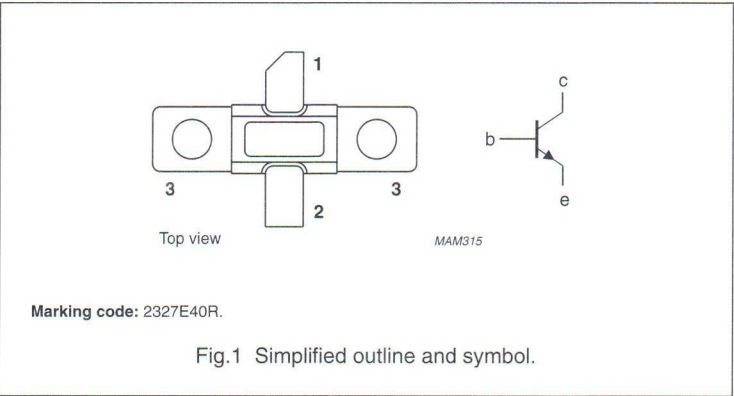

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

NPN microwave power transistor

LV2327E40R

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	—	40	V
V_{CEO}	collector-emitter voltage	open base	—	15	V
V_{CER}	collector-emitter voltage	$R_{BE} = 47\ \Omega$	—	20	V
V_{EBO}	emitter-base voltage	open collector	—	3	V
I_C	collector current (DC)		—	2	A
P_{tot}	total power dissipation	$T_{mb} \leq 75\ ^\circ\text{C}$	—	18	W
T_{stg}	storage temperature		−65	+200	$^\circ\text{C}$
T_j	junction temperature		—	200	$^\circ\text{C}$
T_{sld}	soldering temperature	$t \leq 10\ \text{s}$; note 1	—	235	$^\circ\text{C}$

Note

1. At 0.3 mm from the case.

NPN microwave power transistor

LVE21050R

FEATURES

- Diffused emitter ballasting resistors provide excellent current sharing and withstanding a high VSWR
- Self-aligned process entirely ion implanted
- Gold metallization ensures an optimum temperature profile with excellent performance and reliability
- Input matching cell improves input impedance and allows an easier design of wideband circuits.

APPLICATIONS


- Common emitter class-A linear power amplifiers up to 4.2 GHz.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT445A metal ceramic flange package with the emitter connected to the flange.

PINNING - SOT445A

PIN	DESCRIPTION
1	collector
2	base
3	emitter connected to flange

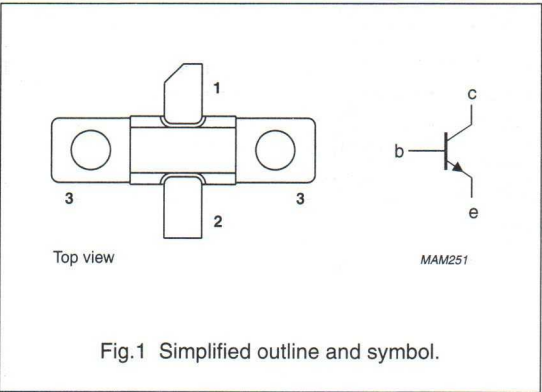

QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common emitter class-A circuit.

MODE OF OPERATION	f (GHz)	V _{cc} (V)	I _c (A)	P _{L1} (W)	G _{po} (dB)	Z _i ; Z _L (Ω)
Class-A (CW)	2.1	16	1.1	typ. 5.5	typ. 8	see Fig 4

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.



NPN microwave power transistor

LVE21050R

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	—	40	V
V_{CER}	collector-emitter voltage	$R_{BE} = 47\ \Omega$	—	20	V
V_{CEO}	collector-emitter voltage	open base	—	16	V
V_{EBO}	emitter-base voltage	open collector	—	3	V
I_C	collector current (DC)		—	2	A
P_{tot}	total power dissipation	$T_{mb} \leq 75\ ^\circ\text{C}$	—	18	W
T_{stg}	storage temperature		-65	+200	$^\circ\text{C}$
T_j	operating junction temperature		—	200	$^\circ\text{C}$
T_{sld}	soldering temperature	at 0.3 mm from case; $t \leq 10\ \text{s}$	—	235	$^\circ\text{C}$

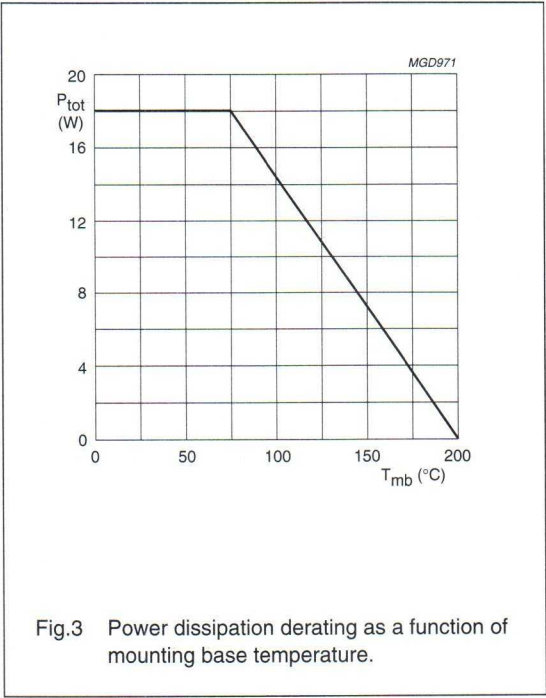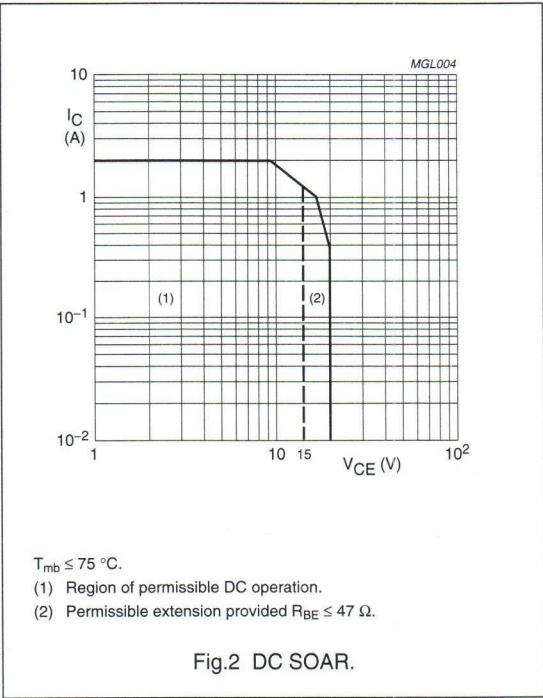

NPN microwave power transistor

LVE21050R

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting-base	$T_j = 75\ ^\circ\text{C}$	4	K/W
$R_{th\ mb-h}$	thermal resistance from mounting-base to heatsink	$T_j = 75\ ^\circ\text{C}$; note 1	0.7	K/W


Note

1. See "Mounting recommendations in the General part of handbook SC15".

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 20\ \text{V}; I_E = 0$	–	–	0.5	mA
		$V_{CB} = 40\ \text{V}; I_E = 0$	–	–	2.5	mA
I_{CER}	collector cut-off current	$V_{CE} = 20\ \text{V}; R_{BE} = 47\ \Omega$	–	–	25	mA
I_{CEO}	collector cut-off current	$V_{CE} = 15\ \text{V}; I_B = 0$	–	–	2	mA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\ \text{V}; I_C = 0$	–	–	100	μA
h_{FE}	DC current gain	$V_{CE} = 3\ \text{V}; I_C = 1\ \text{A}$	15	–	100	

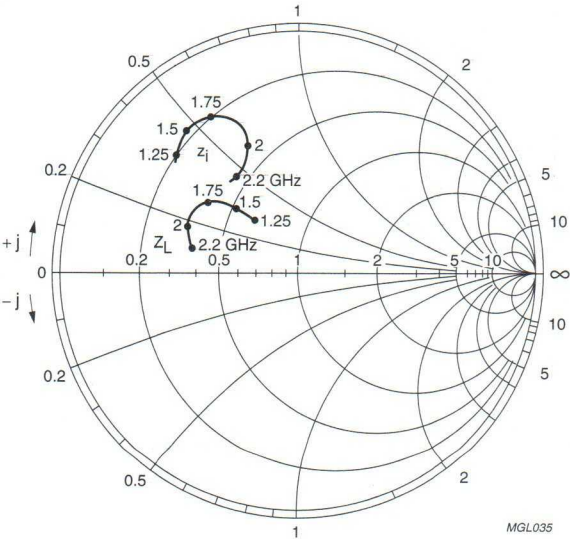

$Z_0 = 10\ \Omega$.

Fig.4 Input and optimum load impedances as functions of frequency; typical values.

NPN microwave power transistor

LWE2010S

FEATURES

- Diffused emitter ballasting resistors providing excellent current sharing and withstanding a high VSWR
- Interdigitated structure provides high emitter efficiency
- Gold metallization realizes very good stability of the characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance.

APPLICATIONS

Common emitter class A power amplifiers at frequencies up to 2.3 GHz.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT446A metal ceramic flange package, with emitter connected to flange.


QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common emitter class A selective amplifier.

MODE OF OPERATION	f (GHz)	V _{CE} (V)	I _C (mA)	P _{L1} (W)	G _{po} (dB)	Z _i /Z _L (Ω)
class A (CW)	2.3	18	110	≥0.8	≥8	see Figs 6 and 7

PINNING - SOT446A

PIN	DESCRIPTION
1	collector
2	base
3	emitter connected to flange

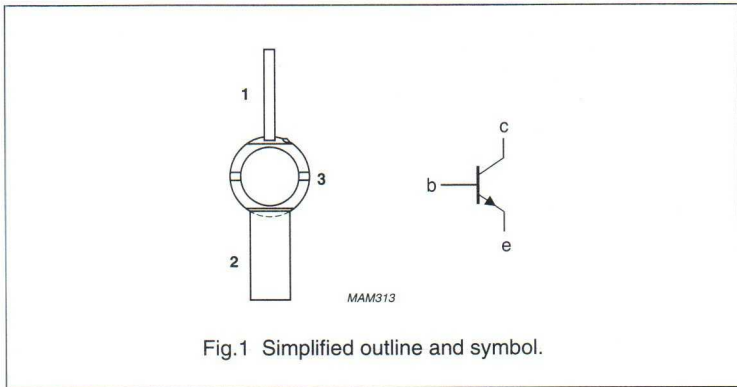

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO disc is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

NPN microwave power transistor

LWE2010S



LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V _{CBO}	collector-base voltage	open emitter	—	40	V
V _{CER}	collector-emitter voltage	R _{BE} = 250 Ω	—	20	V
V _{CEO}	collector-emitter voltage	open base	—	15	V
V _{EBO}	emitter-base voltage	open collector	—	3	V
I _C	collector current (DC)		—	250	mA
P _{tot}	total power dissipation	T _{mb} = 75 °C	—	4.8	W
T _{stg}	storage temperature		−65	+200	°C
T _j	operating junction temperature		—	200	°C
T _{slid}	soldering temperature	t ≤ 10 s; note 1	—	235	°C

Note

1. Up to 0.1 mm from ceramic.

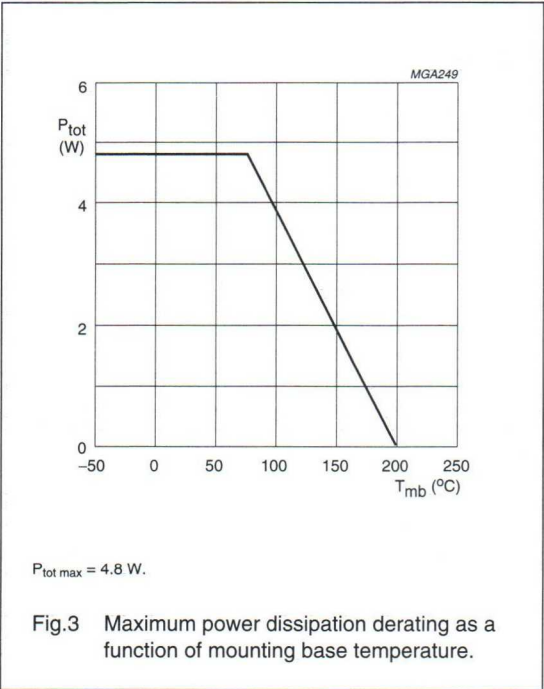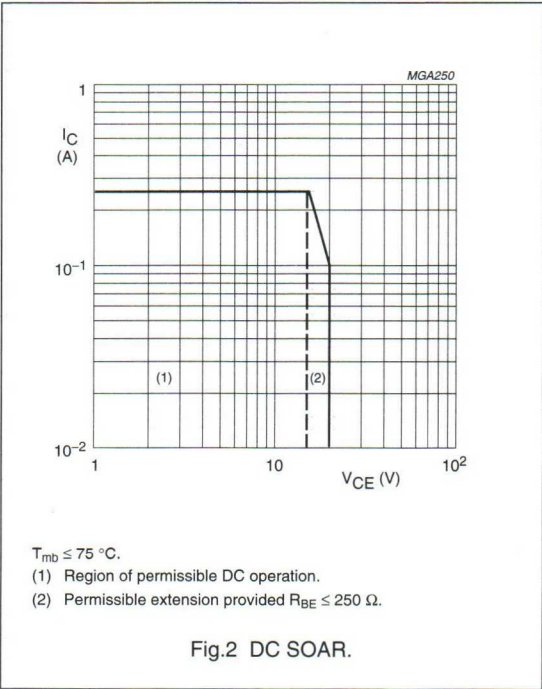

NPN microwave power transistor

LWE2010S

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	$T_j = 75\ ^\circ\text{C}$	22	K/W
$R_{th\ mb-h}$	thermal resistance from mounting base to heatsink	note 1	2	K/W

Note

- See "Mounting recommendations in the General part of handbook SC15".

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 20\ \text{V}; I_E = 0$	–	75	μA
		$V_{CB} = 40\ \text{V}; I_E = 0$	–	500	μA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\ \text{V}; I_C = 0$	–	200	nA
h_{FE}	DC current gain	$V_{CE} = 5\ \text{V}; I_C = 110\ \text{mA}$	15	150	

APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ in a common emitter class A selective amplifier.



MODE OF OPERATION	f (GHz)	V_{CE} (V)	I_C (mA)	P_{L1} (W)	G_{po} (dB)	Z_1 (Ω)	Z_L (Ω)
Class A (CW); note 1	2.3	18	110	≥ 0.8 ; typ. 0.9	≥ 8 ; typ. 9	$5.2 + j\ 16.5$	$7.5 + j\ 8.75$

Note

- In narrowband test circuit shown in Fig.4.

NPN microwave power transistor

LWE2010S

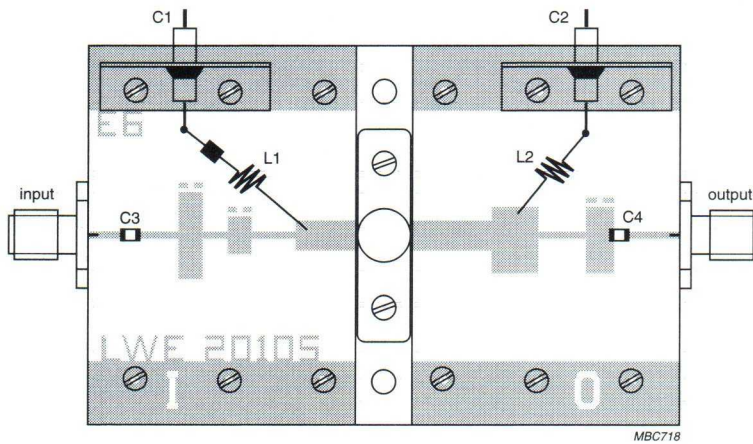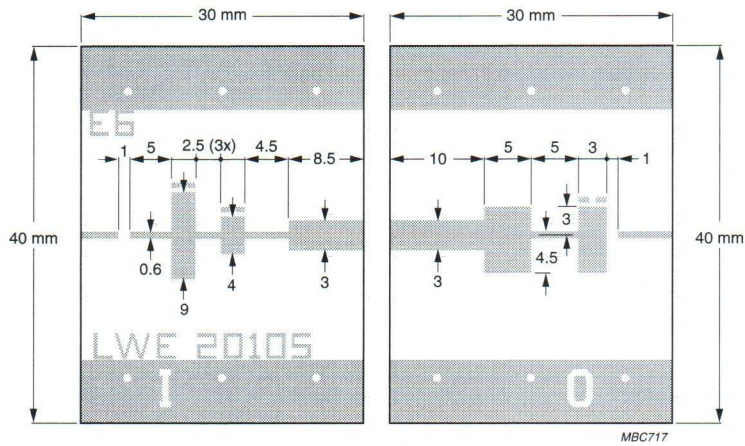

Substrate: Epsilam 10.
 Thickness: 0.635 mm.
 Permittivity: $\epsilon_r = 10$.


Fig.4 Prematching test circuit board.

NPN microwave power transistor

LWE2010S

List of components (see Fig.4)

COMPONENT	DESCRIPTION	VALUE	DIMENSIONS	CATALOGUE NO.
L1	3 turns 0.2 mm copper wire with ferrite bead		int. dia. 2 mm	
L2	5 turns 0.5 mm copper wire		int. dia. 2 mm	
C1, C2	feedthrough bypass capacitor			Erie, ref. 1214-001
C3, C4	DC block capacitor	100 pF		

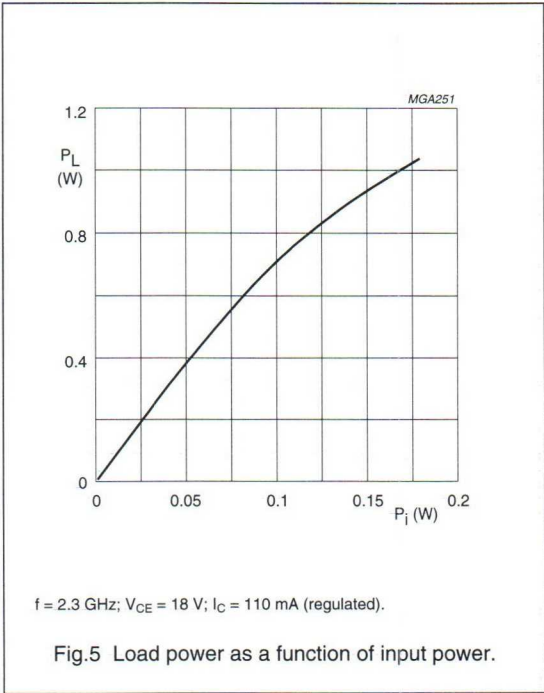

NPN microwave power transistor

LWE2010S

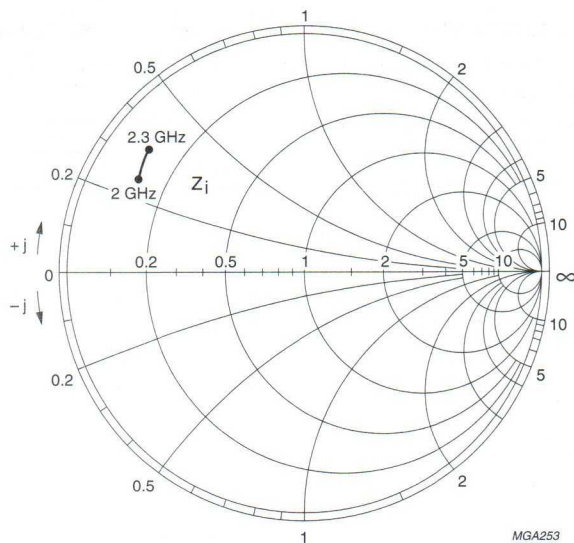


Fig.6 Input impedance as a function of frequency associated with optimum load impedances.

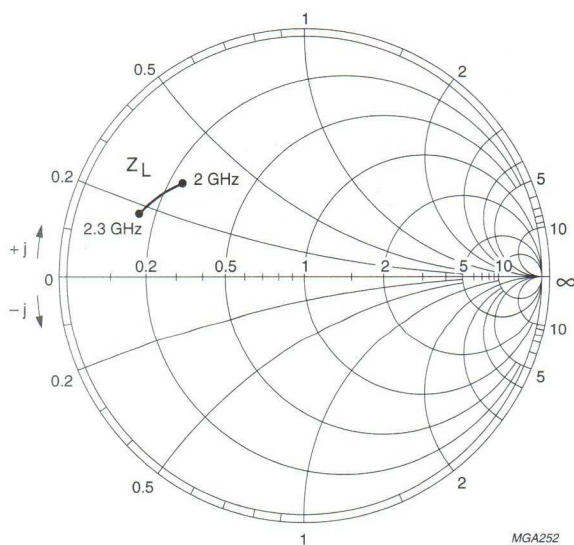


Fig.7 Optimum load impedance as a function of frequency; typical values.

NPN microwave power transistor

LWE2015R

FEATURES

- Interdigitated structure provides high emitter efficiency
- Diffused emitter ballasting resistor provides excellent current sharing and withstanding a high VSWR
- Gold metallization realizes very stable characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance.

APPLICATIONS


- Common emitter class-A amplifiers up to 2.3 GHz in CW conditions for military and professional applications.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT446A metal ceramic studless package.

PINNING - SOT446A

PIN	DESCRIPTION
1	collector
2	base
3	emitter



MAM313

Marking code: 411

Fig.1 Simplified outline and symbol.

QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common emitter class-A selective amplifier.

MODE OF OPERATION	f (GHz)	V _{CE} (V)	I _C (mA)	P _{L1} (W)	G _{po} (dB)	Z _i (Ω)	Z _L (Ω)
Class-A (CW)	2.3	16	250	≥1.2	≥7.5	3.5 + j11	6.4 + j2

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO disc is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.



NPN microwave power transistor

LWE2015R

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	–	35	V
V_{CER}	collector-emitter voltage	$R_{BE} = 70\ \Omega$	–	20	V
V_{CEO}	collector-emitter voltage	open base	–	16	V
V_{EBO}	emitter-base voltage	open collector	–	3	V
I_C	collector current (DC)		–	450	mA
P_{tot}	total power dissipation	$T_{mb} \leq 75\ ^\circ\text{C}$	–	6	W
T_{stg}	storage temperature		–65	+200	$^\circ\text{C}$
T_j	operating junction temperature		–	200	$^\circ\text{C}$
T_{sld}	soldering temperature	at 0.1 mm from case; $t \leq 10\ \text{s}$	–	235	$^\circ\text{C}$

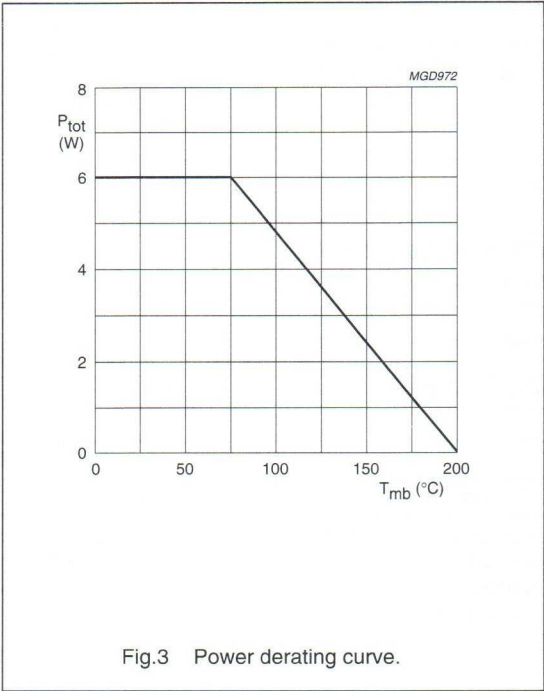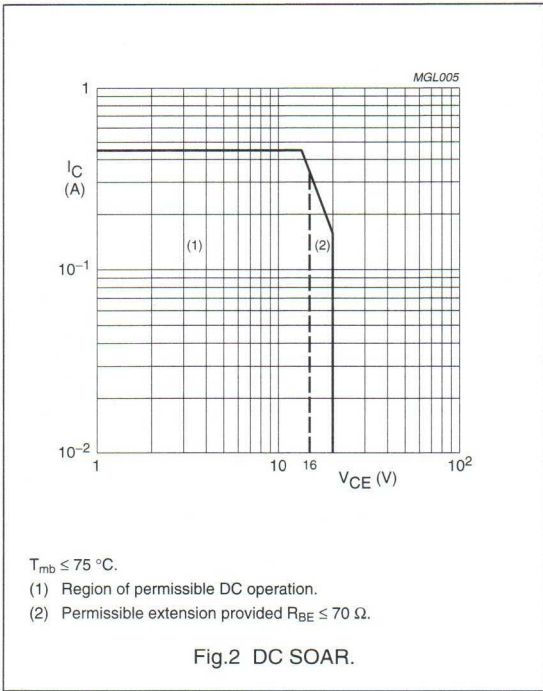

NPN microwave power transistor

LWE2015R

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting-base	$T_j = 75\ ^\circ\text{C}$	12	K/W

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 25\ \text{V}; I_E = 0$	—	—	≤ 10	μA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\ \text{V}; I_C = 0$	—	—	≤ 10	μA
h_{FE}	DC current gain	$V_{CE} = 5\ \text{V}; I_C = 230\ \text{mA}$	—	40	—	
C_{cb}	collector-base capacitance	$V_{CB} = 16\ \text{V}; V_{EB} = 1.5\ \text{V};$ $I_E = I_C = 0; f = 1\ \text{MHz}$	—	2	—	pF
C_{ce}	collector-emitter capacitance	$V_{CE} = 16\ \text{V}; V_{EB} = 1.5\ \text{V};$ $I_E = I_C = 0; f = 1\ \text{MHz}$	—	2	—	pF
C_{eb}	emitter-base capacitance	$V_{CB} = 10\ \text{V}; V_{EB} = 1\ \text{V};$ $I_C = I_E = 0; f = 1\ \text{MHz}$	—	15	—	pF

APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ in a common emitter class-A selective circuit; note 1.


MODE OF OPERATION	f (GHz)	V_{CE} (V)	I_C (mA)	P_{L1} (W)	G_{po} (dB)	Z_i (Ω)	Z_L (Ω)
Class-A (CW)	2.3	16	250	≥ 1.2 typ. 1.6	≥ 7.5 typ. 8.1	$3.5 + j11$	$6.4 + j2$

Note

1. Circuit consists of prematching circuit boards in combination with complementary input and output slug tuners.


NPN microwave power transistor

LWE2015R

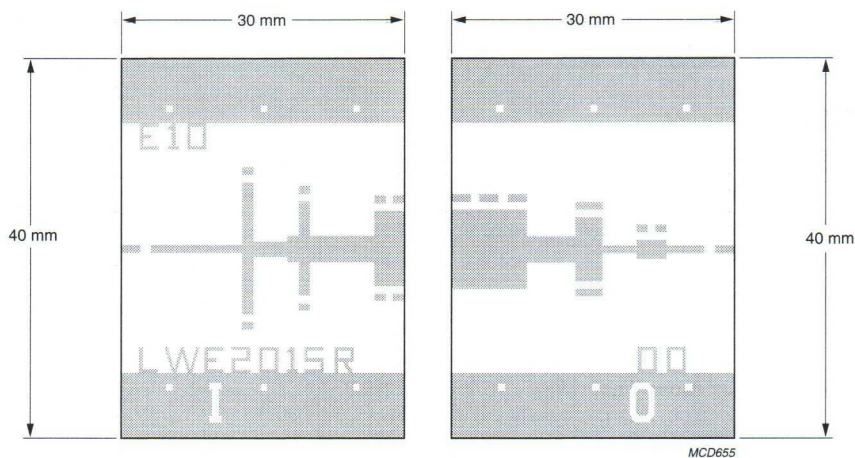

PTFE fibreglass dielectric ($\epsilon_r = 2.54$); thickness: 0.8 mm.

Fig.4 Prematching test circuit board.

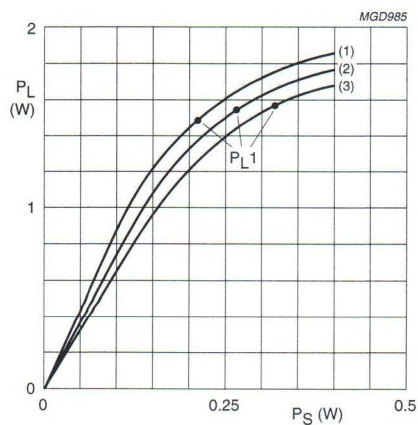

$V_{CE} = 16$ V; $I_C = 250$ mA (regulated).

(1) 1.7 GHz.


(2) 2 GHz.

(3) 2.3 GHz.

Fig.5 Load power as a function of source power; typical values.

NPN microwave power transistor

LWE2015R

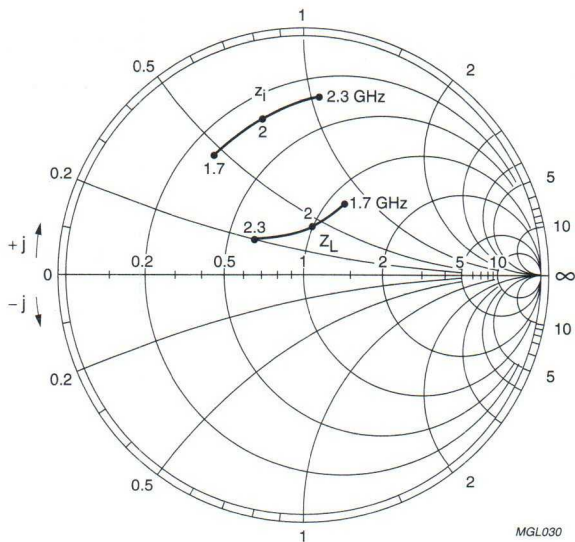

$Z_0 = 10 \Omega$; $P_{L1} = 1.6 \text{ W}$; $T_{mb} = 25^\circ \text{C}$.

Fig.6 Input and optimum load impedances as functions of frequency; typical values.

NPN microwave power transistor

LX1214E500X

FEATURES

- Diffused emitter ballasting resistors providing excellent current sharing and withstanding a high VSWR
- Interdigitated structure provides high emitter efficiency
- Gold metallization realizes very good stability of the characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance
- Internal input and output prematching ensures a good stability and allows an easier design of wideband circuits.

APPLICATIONS

Intended for use in common emitter, class AB amplifiers in CW conditions for professional applications between 1.2 and 1.4 GHz.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT439A metal ceramic flange package, with emitter connected to flange.


QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common emitter class AB.

MODE OF OPERATION	f (GHz)	V _{CE} (V)	I _{CQ} (A)	P _{L1} (W)	G _{po} (dB)	η _C (%)	Z _i ; Z _L (Ω)
Class AB (CW)	1.2 to 1.4	24	0.15	typ. 50	typ. 11	typ. 50	see Figs 6 and 7

PINNING - SOT439A

PIN	DESCRIPTION
1	collector
2	base
3	emitter connected to flange

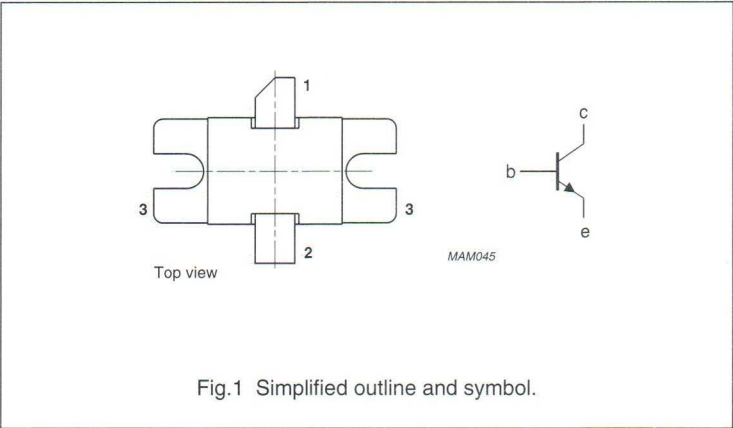

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO disc is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

NPN microwave power transistor

LX1214E500X



LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	—	45	V
V_{CER}	collector-emitter voltage	$R_{BE} = 220\ \Omega$	—	30	V
V_{CEO}	collector-emitter voltage	open base	—	25	V
V_{EBO}	emitter-base voltage	open collector	—	3	V
I_C	collector current (DC)		—	9	A
P_i	input power	$f = 1.2\text{ to }1.4\text{ GHz}$; $V_{CC} = 24\text{ V}$; class AB	—	7	W
P_{tot}	total power dissipation	$T_{mb} = 75\text{ }^{\circ}\text{C}$	—	70	W
T_{stg}	storage temperature		−65	+200	$^{\circ}\text{C}$
T_j	junction temperature		—	200	$^{\circ}\text{C}$
T_{sld}	soldering temperature	$t \leq 10\text{ s}$; note 1	—	235	$^{\circ}\text{C}$

Note

1. Up to 0.2 mm from ceramic.

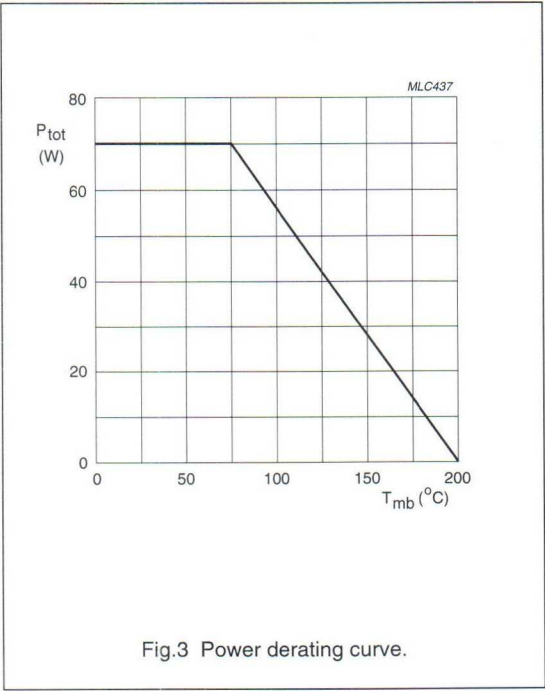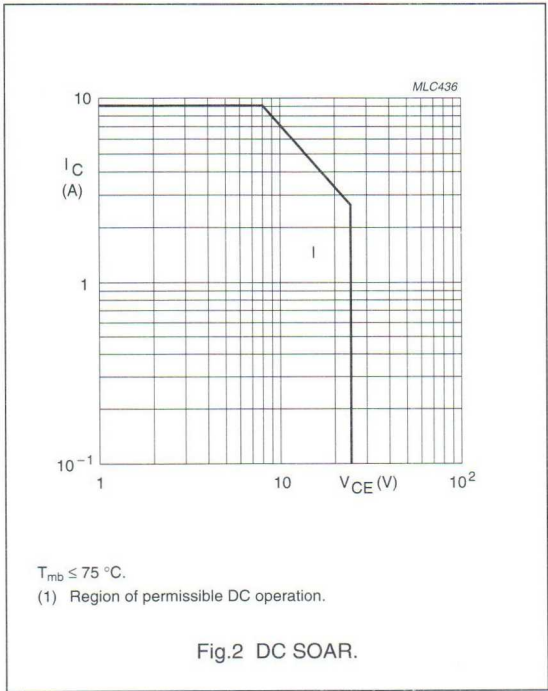

NPN microwave power transistor

LX1214E500X

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	$T_j = 100\ ^\circ\text{C}$	1.3	K/W
$R_{th\ mb-h}$	thermal resistance from mounting base to heatsink	note 1	0.2	K/W

Note

1. See "Mounting recommendations in the General part of handbook SC15".

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
I_{CBO}	collector cut-off current	$I_E = 0$; $V_{CB} = 20\ \text{V}$	–	4.5	mA
$V_{(BR)CBO}$	collector-base breakdown voltage	$I_C = 22\ \text{mA}$	45	–	V
$V_{(BR)CER}$	collector-emitter breakdown voltage	$I_C = 150\ \text{mA}$; $R_{BE} = 220\ \Omega$	30	–	V
$V_{(BR)EBO}$	emitter-base breakdown voltage	$I_C = 22\ \text{mA}$	3	–	V
h_{FE}	DC current gain	$I_C = 4.5\ \text{A}$; $V_{CE} = 3\ \text{V}$	15	100	


APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ in a common-emitter class AB amplifier.

MODE OF OPERATION	f (GHz)	V_{CE} (V)	I_{CQ} (A)	P_{L1} (W)	G_{po} (dB)	η_c (%)	Z_i ; Z_L (Ω)
Class AB (CW)	1.2 to 1.4	24	0.15	typ. 50	typ. 11	typ. 50	see Figs 6 and 7

NPN microwave power transistor

LX1214E500X

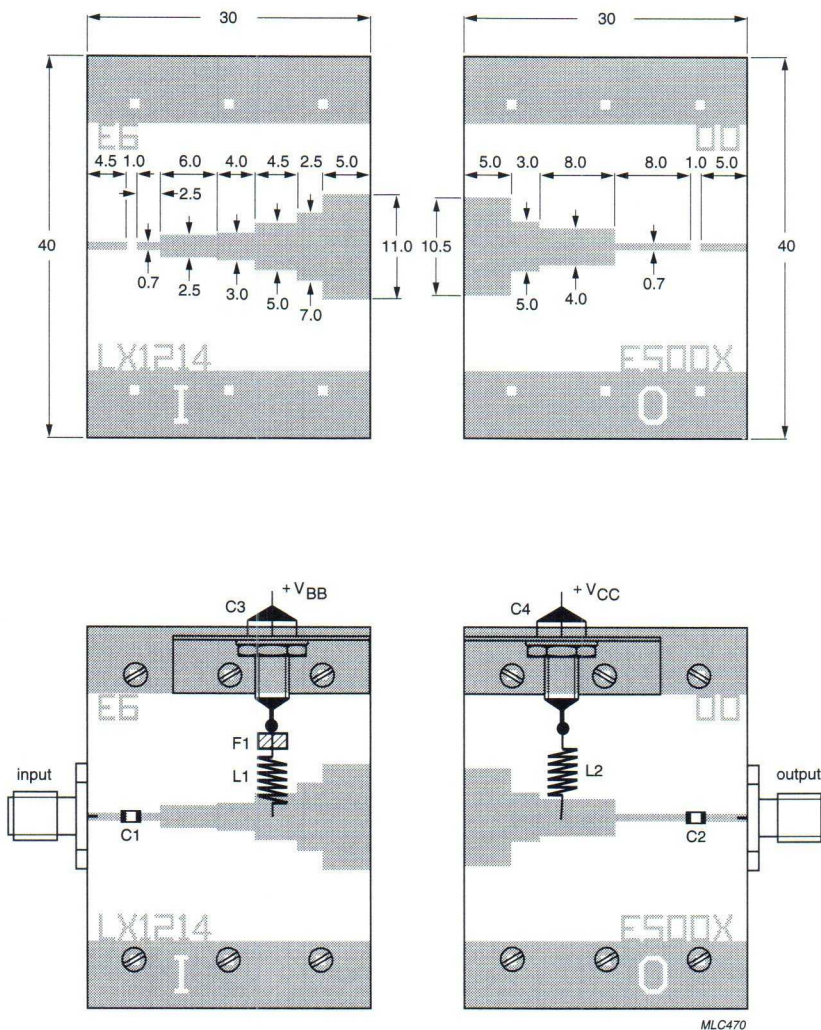

The test circuit is split into two independent halves each being 30 × 40 mm in size.

Dimensions in mm.

Substrate: Epsilam 10.

Thickness: 0.635 mm.

Permittivity: $\epsilon_r = 10$.

Fig.4 Test circuit.

NPN microwave power transistor

LX1214E500X

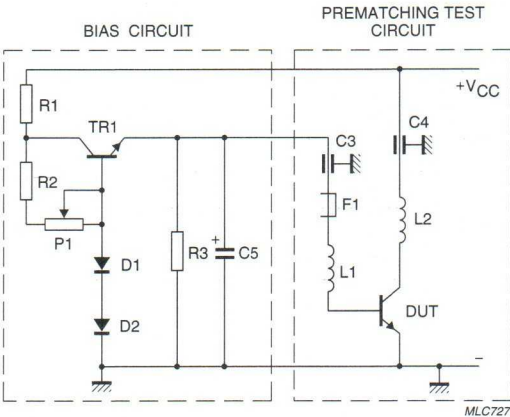


Fig.5 Class AB bias circuit.

List of components (see Figs 4 and 5)

COMPONENT	DESCRIPTION	VALUE	ORDERING INFORMATION
TR1	transistor, BD239 or equivalent		
C1, C2	DC blocking chip capacitor	100 pF	ATC 100A1201kp
C3, C4	feedthrough bypass capacitor	1 500 pF	Erie1250-003
C5	electrolytic capacitor	10 µF, >30 V	
D1	diode BY239 or equivalent; note 1		
D2	diode BY239 or equivalent; note 2		
L1	3.5 turns 0.5 mm copper wire; internal diameter = 2 mm		
L2	3 turns 0.5 mm copper wire; internal diameter = 2 mm		
P1	linear potentiometer	4.7 kΩ	
R1	resistor	100 Ω, 0.25 W	
R2	resistor	1 kΩ, 0.25 W	
R3	resistor	56 Ω, 0.25 W	
F1	ferrite bead		Philips tube, 12NC = 4330 030 43081 4.2 × 2.2 × 3.2 mm (4B1)

Notes

- 1. In thermal contact with TR1.
- 2. In thermal contact with DUT.


NPN microwave power transistor

LX1214E500X

Input and optimum load impedances

$V_{CE} = 24\text{ V}$; $I_{CQ} = 0.15\text{ A}$; typical values at $P_L = P_{L1}$.

f (GHz)	Z_i (Ω)	Z_L (Ω)
1.2	$1.8 + j2.6$	$4.0 - j2.2$
1.3	$4.0 + j2.1$	$3.8 - j0.5$
1.4	$3.2 + j1.0$	$3.2 - j0.5$

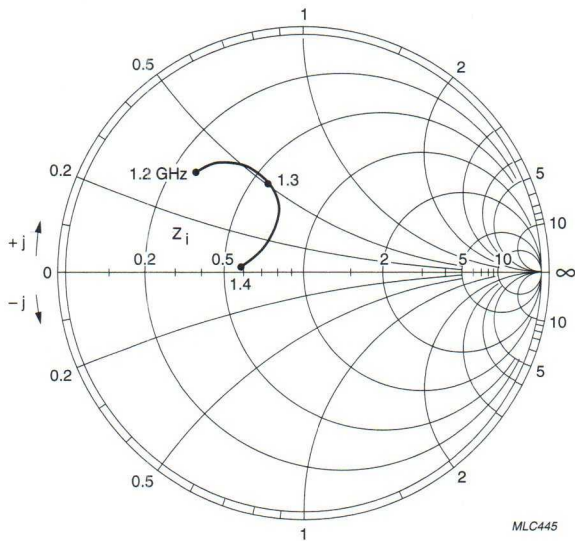


$V_{CE} = 24\text{ V}$; $Z_o = 10\ \Omega$; $I_{CQ} = 0.15\text{ A}$.

Fig.6 Input impedance as a function of frequency; typical values at $P_L = P_{L1}$.

NPN microwave power transistor

LX1214E500X

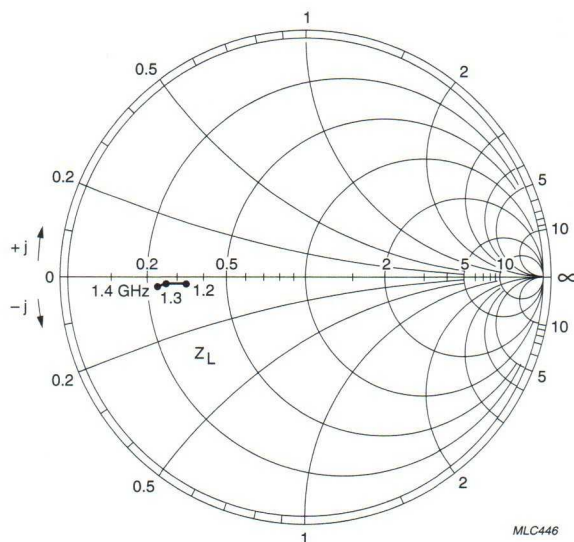

$V_{CE} = 24 \text{ V}$; $Z_o = 10 \Omega$; $I_{CQ} = 0.15 \text{ A}$.

Fig.7 Optimum load impedance as a function of frequency; typical values at $P_L = P_{L1}$.

NPN microwave power transistor

LXE15450X

FEATURES

- Diffused emitter ballasting resistors providing excellent current sharing and withstanding a high VSWR
- Interdigitated common-emitter structure provides high emitter efficiency
- Gold metallization realizes very good stability of the characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance
- Internal input and output prematching ensures a good stability and allows an easier design of circuits.

APPLICATIONS

Intended for use in common-emitter, class AB amplifiers in CW conditions for professional applications between 1.5 GHz and 1.7 GHz.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT439A metal ceramic flange package, with emitter connected to flange.

QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common emitter class AB amplifier.

MODE OF OPERATION	f (GHz)	V _{CE} (V)	I _{CQ} (A)	P _{L1} (W)	G _{po} (dB)	η_c (%)	Z _i ; Z _L (Ω)
Class AB (CW)	1.5	24	0.15	≥ 45	≥ 8	typ. 48	see Figs 8 and 9

PINNING - SOT439A

PIN	DESCRIPTION
1	collector
2	base
3	emitter connected to flange

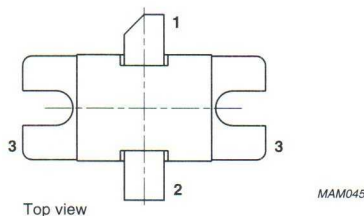


Fig.1 Simplified outline and symbol.

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO disc is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

NPN microwave power transistor

LXE15450X



LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	–	45	V
V_{CER}	collector-emitter voltage	$R_{BE} = 220\ \Omega$	–	30	V
V_{CEO}	collector-emitter voltage	open base	–	25	V
V_{EBO}	emitter-base voltage	open collector	–	3	V
I_C	collector current (DC)		–	9	A
P_i	input power	$f = 1.5\text{ GHz}$; $V_{CE} = 24\text{ V}$; class AB	–	12	W
P_{tot}	total power dissipation	$T_{mb} = 75\text{ }^\circ\text{C}$	–	70	W
T_{stg}	storage temperature		–65	+200	$^\circ\text{C}$
T_j	junction temperature		–	200	$^\circ\text{C}$
T_{sld}	soldering temperature	$t \leq 10\text{ s}$; note 1	–	235	$^\circ\text{C}$

Note

1. Up to 0.2 mm from ceramic.

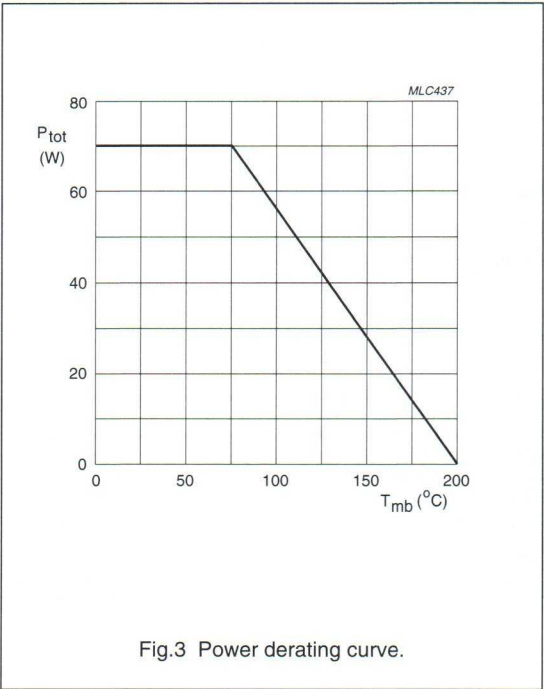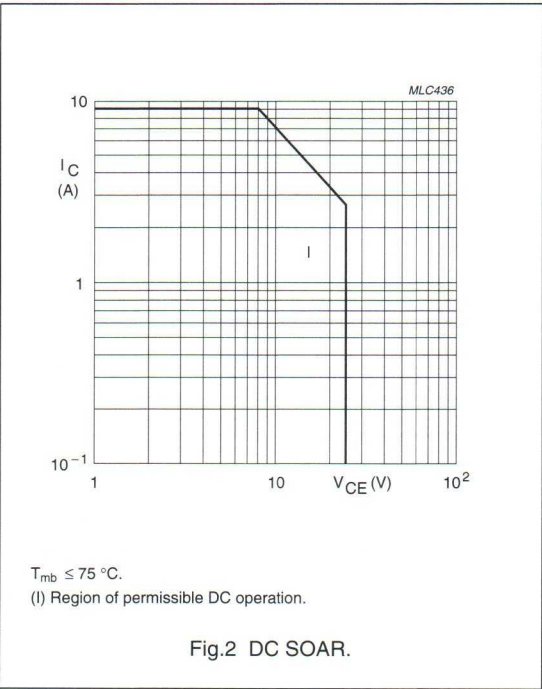

NPN microwave power transistor

LXE15450X

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	$T_j = 100\ ^\circ\text{C}$	1.3	K/W
$R_{th\ mb-h}$	thermal resistance from mounting base to heatsink	note 1	0.2	K/W

Note

1. See "Mounting recommendations in the General part of handbook SC15".

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
I_{CBO}	collector cut-off current	$I_E = 0$; $V_{CB} = 20\ \text{V}$	—	4.5	mA
$V_{(BR)CBO}$	collector-base breakdown voltage	$I_C = 22\ \text{mA}$	45	—	V
$V_{(BR)CER}$	collector-emitter breakdown voltage	$I_C = 150\ \text{mA}$; $R_{BE} = 220\ \Omega$	30	—	V
$V_{(BR)EBO}$	emitter-base breakdown voltage	$I_E = 22\ \text{mA}$	3	—	V
h_{FE}	DC current gain	$I_C = 4.5\ \text{A}$; $V_{CE} = 3\ \text{V}$	15	100	


APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ in a common-emitter class AB amplifier.

MODE OF OPERATION	f (GHz)	V_{CE} (V)	I_{CQ} (A)	P_{L1} (W)	G_{po} (dB)	η_c (%)	Z_i ; Z_L (Ω)
Class AB (CW)	1.5	24	0.15	≥ 45 typ. 50	≥ 8 typ. 8.8	typ. 48	see Figs 8 and 9

NPN microwave power transistor

LXE15450X

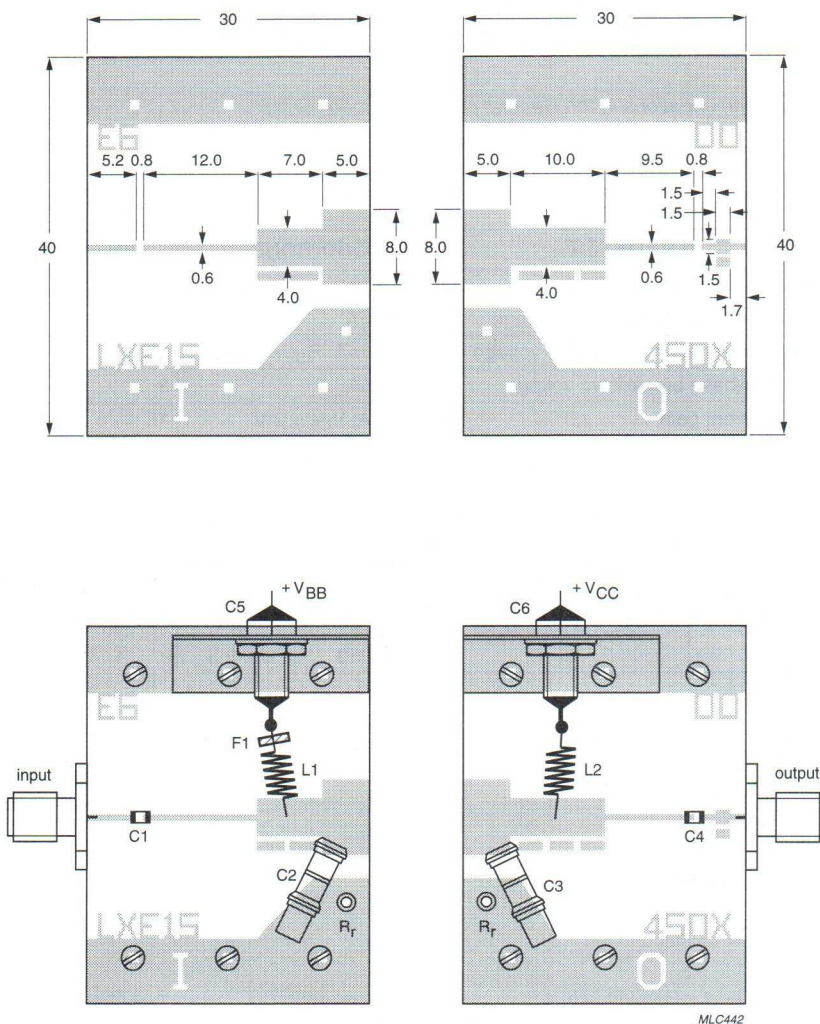

MLC442

The test circuit is split into two independent halves each being 30 × 40 mm in size.

Dimensions in mm.

Substrate: Epsilam 10.

Thickness: 0.635 mm.

Permittivity: $\epsilon_r = 10$.

Fig.4 Test circuit.

NPN microwave power transistor

LXE15450X

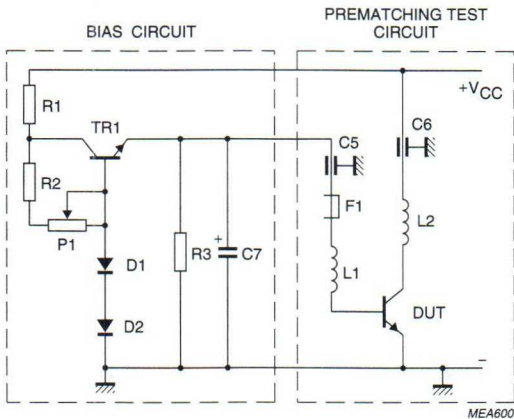


Fig.5 Class AB bias circuit.

List of components (see Figs 4 and 5)


COMPONENT	DESCRIPTION	VALUE	ORDERING INFORMATION
TR1	transistor, BD239 or equivalent		
C1, C4	DC blocking chip capacitor	100 pF	ATC 100A1201kp
C2, C3	trimmer capacitor	0.5 to 5 pF	Tekelec 721-1
C5, C6	feedthrough bypass capacitor	1 500 pF	Erie 1250-003
C7	electrolytic capacitor	10 μ F, >30 V	
D1	diode BY239 or equivalent; note 1		
D2	diode BY239 or equivalent; note 2		
L1	4 turns 0.5 mm copper wire; internal diameter = 2 mm		
L2	3 turns 0.5 mm copper wire; internal diameter = 2 mm		
P1	linear potentiometer	4.7 k Ω	
R1	resistor	100 Ω , 0.25 W	
R2	resistor	10 k Ω , 0.25 W	
R3	resistor	56 Ω , 0.25 W	
F1	ferrite bead		Philips tube, 12NC = 4330 030 43081 4.2 $\times$ 2.2 $\times$ 3.2 mm (4B1)
R _r	copper rivet		

Notes

1. In thermal contact with TR1.
2. In thermal contact with DUT.


NPN microwave power transistor

LXE15450X

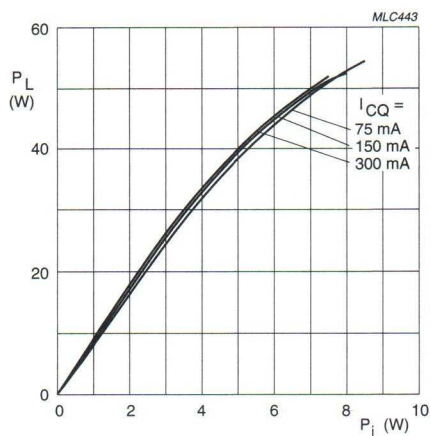

$V_{CE} = 24 \text{ V.}$
 $f = 1500 \text{ MHz.}$

Fig.6 Load power as a function of input power.

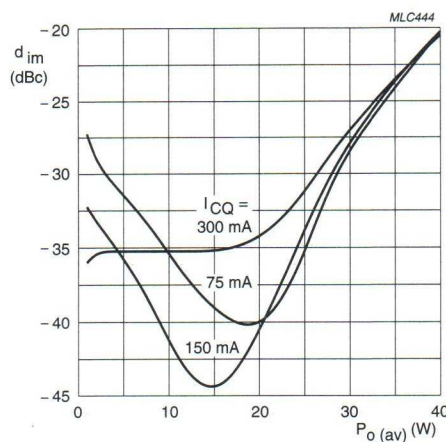

$V_{CE} = 24 \text{ V.}$
 $f_1 = 1500 \text{ MHz.}$
 $f_2 = 1500.2 \text{ MHz.}$

Fig.7 Intermodulation distortion as a function of average output power.


Input and optimum load impedances

$V_{CE} = 24 \text{ V; } I_{CQ} = 0.15 \text{ A;}$ typical values at $P_L = P_{L1}$ (see Figs 8 and 9).

f (GHz)	Z_i (Ω)	Z_L (Ω)
1.500	$2.8 + j3.5$	$3.2 - j0.25$
1.575	$5.7 + j5.0$	$2.5 - j0.15$
1.650	$6.0 + j0.4$	$2.4 - j0.20$


NPN microwave power transistor

LXE15450X

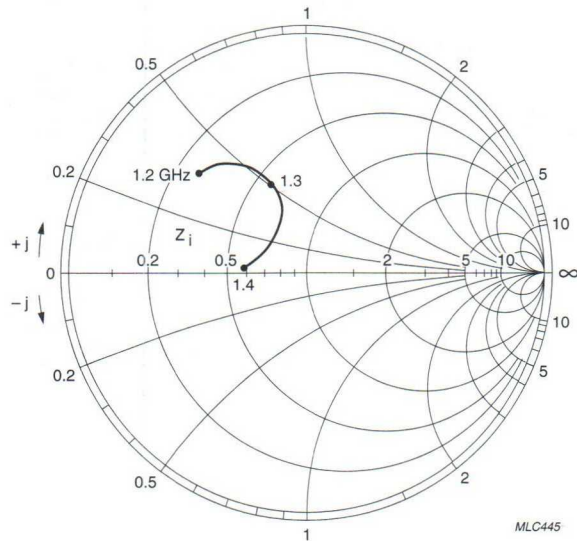

$V_{CE} = 24 \text{ V}$; $Z_0 = 10 \Omega$; $I_{CQ} = 0.15 \text{ A}$.

Fig.8 Input impedance as a function of frequency; typical values at $P_L = P_{L1}$.

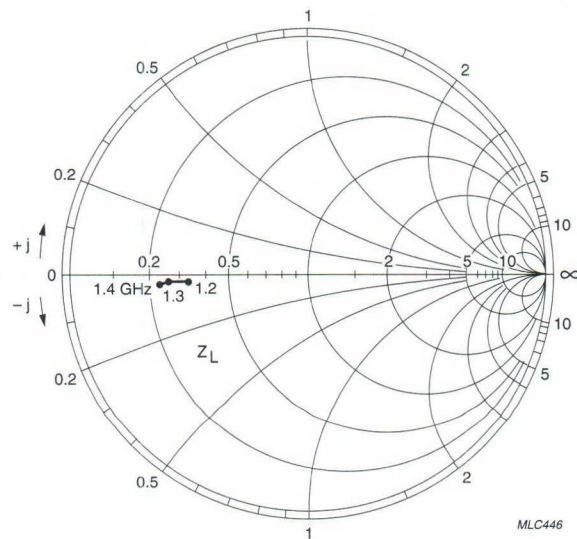

$V_{CE} = 24 \text{ V}$; $Z_0 = 10 \Omega$; $I_{CQ} = 0.15 \text{ A}$.

Fig.9 Optimum load impedance as a function of frequency; typical values at $P_L = P_{L1}$.

NPN microwave power transistor

LXE16350X

FEATURES

- Diffused emitter ballasting resistors providing excellent current sharing and withstanding a high VSWR
- Interdigitated structure provides high emitter efficiency
- Gold metallization realizes very good stability of the characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance
- Internal input and output prematching ensures good stability and allows an easier design of wideband circuits.

APPLICATIONS

Common emitter class AB power amplifiers for military and professional applications at 1.65 GHz.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT439A metal ceramic package, with emitter connected to flange.


QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common emitter class AB amplifier.

MODE OF OPERATION	f (GHz)	V_{CE} (V)	I_{CQ} (A)	P_{L1} (W)	G_{po} (dB)	$Z_i; Z_L$ (Ω)
Class AB (CW)	1.65	24	0.3	≥ 32	≥ 9	see Figs 8 and 9

PINNING - SOT439A

PIN	DESCRIPTION
1	collector
2	base
3	emitter connected to flange

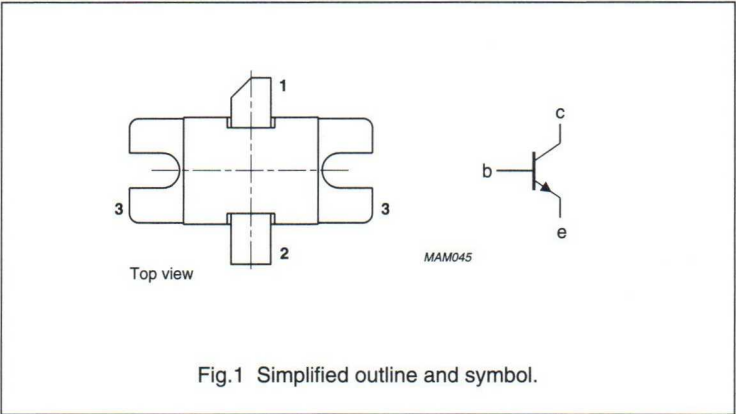

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

NPN microwave power transistor

LXE16350X



LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	–	45	V
V_{CER}	collector-emitter voltage	$R_{BE} = 220\ \Omega$	–	30	V
V_{CEO}	collector-emitter voltage	open base	–	20	V
V_{EBO}	emitter-base voltage	open collector	–	3	V
I_C	collector current (DC)		–	6	A
P_{tot}	total power dissipation	$T_{mb} = 75\ ^\circ\text{C}$	–	57	W
T_{stg}	storage temperature		–65	+200	$^\circ\text{C}$
T_j	operating junction temperature		–	200	$^\circ\text{C}$
T_{sld}	soldering temperature	$t \leq 10\text{ s}$; note 1	–	235	$^\circ\text{C}$

Note

1. Up to 0.2 mm from ceramic.

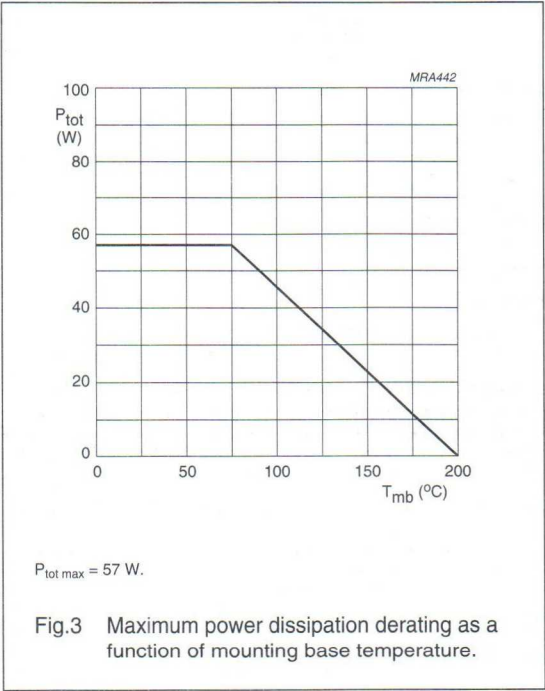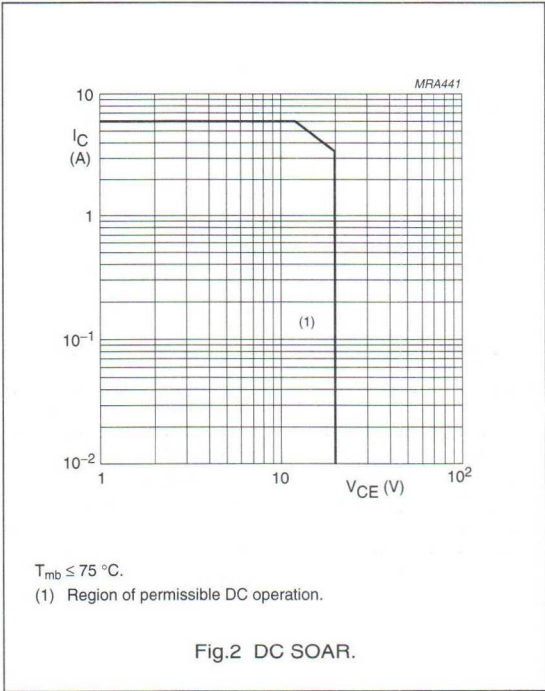

NPN microwave power transistor

LXE16350X

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	$T_j = 100\ ^\circ\text{C}$	1.7	K/W
$R_{th\ mb-h}$	thermal resistance from mounting base to heatsink	note 1	0.2	K/W

Note

1. See "Mounting recommendations in the General part of handbook SC15".

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 20\ \text{V}; I_E = 0$	—	3	mA
		$V_{CB} = 40\ \text{V}; I_E = 0$	—	30	mA
I_{CER}	collector cut-off current	$V_{CE} = 30\ \text{V}; R_{BE} = 220\ \Omega$	—	30	mA
I_{CEO}	collector cut-off current	$V_{CE} = 20\ \text{V}; I_B = 0$	—	30	mA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\ \text{V}; I_C = 0$	—	300	μA
h_{FE}	DC current gain	$V_{CE} = 3\ \text{V}; I_C = 3\ \text{A}$	15	100	

APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ in a common-emitter class AB amplifier (note 1).

MODE OF OPERATION	f (GHz)	V_{CE} (V)	I_{CQ} (A)	P_{L1} (W)	G_{po} (dB)	$Z_i; Z_L$ (Ω)
Class AB (CW)	1.65	24	0.3	≥ 32 typ. 35	≥ 9 typ. 10	see Figs 8 and 9

Note



1. The test circuit is split into 2 independent halves each being $30 \times 40\ \text{mm}$ in size.

List of components (see Fig 4).

COMPONENT	DESCRIPTION	VALUE	DIMENSIONS	CATALOGUE NO.
L1	5 turns 0.5 mm diameter copper wire with ferrite bead		int. dia. 2 mm	
L2	5 turns 0.5 mm diameter copper wire		int. dia. 2 mm	
C1, C4	DC blocking chip capacitor	100 pF		
C2, C3	trimmer capacitor	0.5 to 5 pF		Tekelec
C5, C6	feedthrough bypass capacitor	1500 pF		Erie, ref. 1250-003

NPN microwave power transistor

LXE16350X

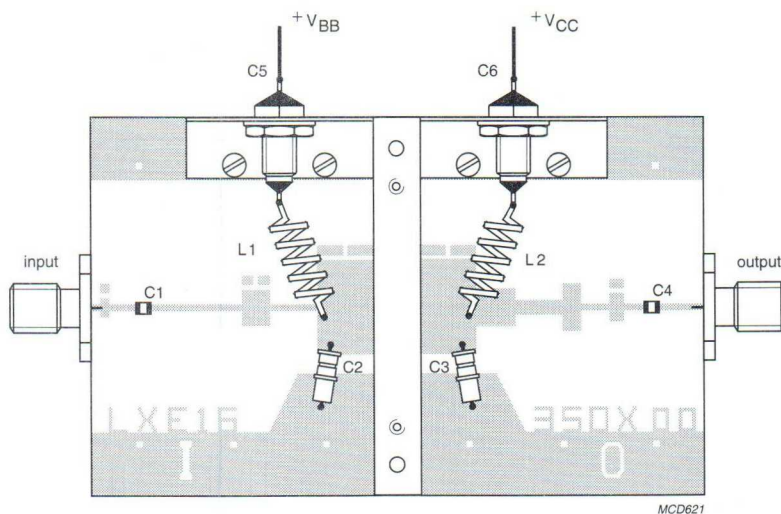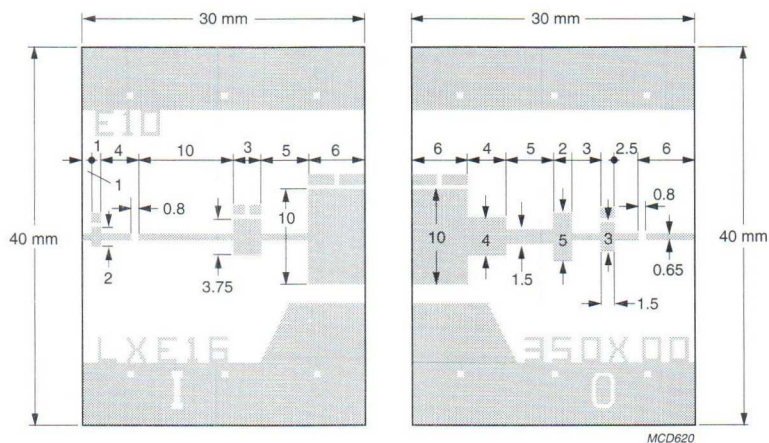

Substrate: Epsilam 10.
 Thickness: 0.635 mm.
 Permittivity: $\epsilon_r = 10$.

Fig.4 Prematching test circuit board.

NPN microwave power transistor

LXE16350X

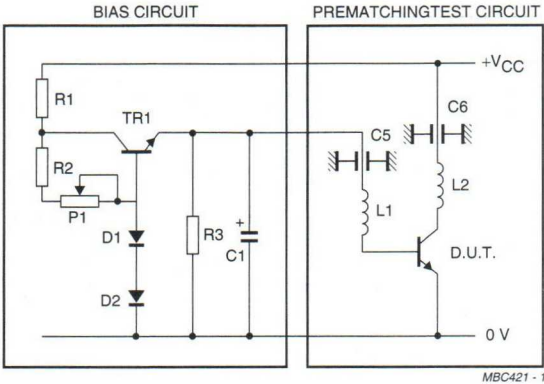


Fig.5 Class AB bias circuit at 1.65 GHz.

List of components (see Fig 5)

COMPONENT	DESCRIPTION	VALUE	CATALOGUE NO.
TR1	transistor, BDT85 (or equivalent)		
D1	diode, IN4148 (or equivalent); note 1		
D2	diode, BY239800; note 2		
R1	resistor	100 Ω	
R2	resistor	10 k Ω	
R3	resistor	56 Ω	
P1	potentiometer, 10 turns (sfernice)	4.7 k Ω	
C1	electrolytic capacitor	10 μ F (>30 V)	
C5, C6	feedthrough bypass capacitor	1500 pF	Erie, ref. 1250-003
L1	5 turns 0.5 mm copper wire with ferrite bead		
L2	5 turns 0.5 mm copper wire		

Notes

1. In thermal contact with TR1.
2. In thermal contact with D.U.T.

NPN microwave power transistor

LXE16350X

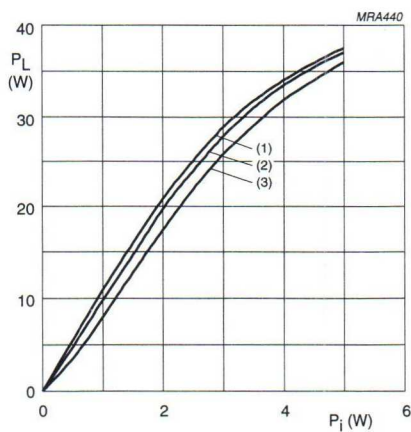
 $V_{CE} = 24$ V.(1) $I_{CQ} = 300$ mA.(2) $I_{CQ} = 100$ mA.(3) $I_{CQ} = 10$ mA.

Fig.6 Load power as a function of input power.


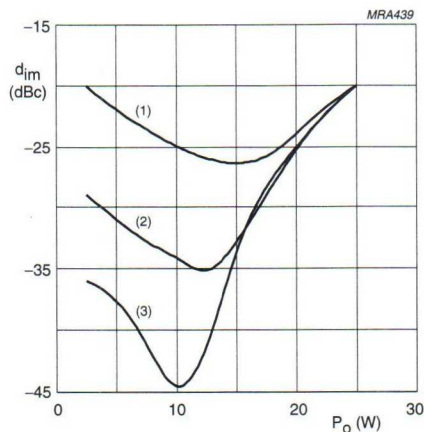
 $V_{CE} = 24$ V. $f_1 = 1.65$ GHz $f_2 = 1.6502$ GHz.(1) $I_{CQ} = 10$ mA.(2) $I_{CQ} = 100$ mA.(3) $I_{CQ} = 300$ mA.

Fig.7 Intermodulation distortion as a function of average output power.


NPN microwave power transistor

LXE16350X

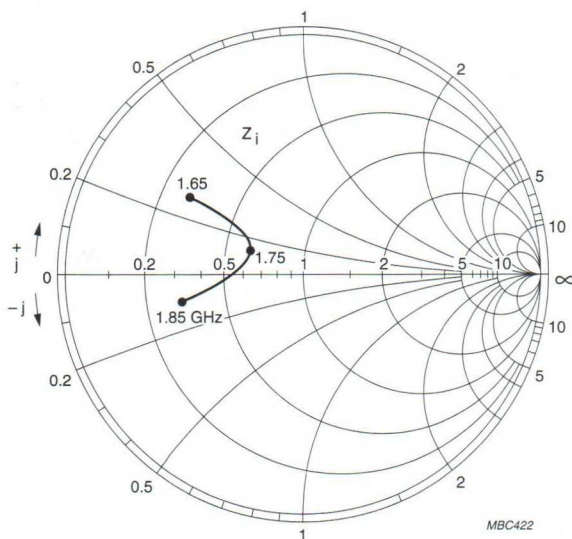

$V_{CE} = 24 \text{ V}$; $Z_0 = 10 \Omega$; $I_{CQ} = 0.3 \text{ A}$.

Fig.8 Input impedance as a function of frequency; typical values.

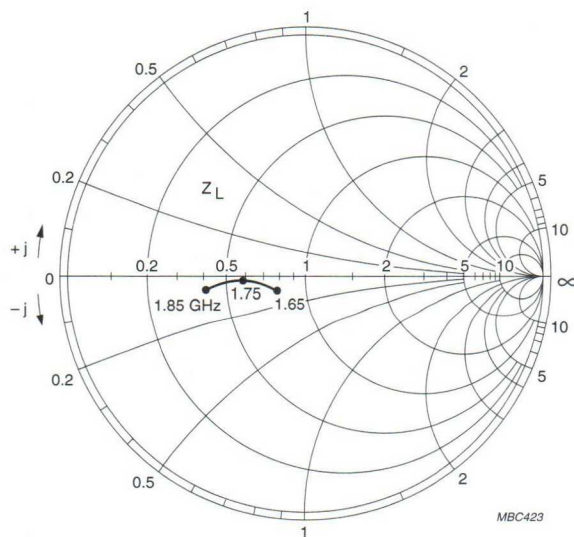

$V_{CE} = 24 \text{ V}$; $Z_0 = 10 \Omega$; $I_{CQ} = 0.3 \text{ A}$.

Fig.9 Optimum load impedance as a function of frequency; typical values.

NPN microwave power transistor

LXE18300X

FEATURES

- Internal input and output prematching ensures a good stability and allows an easier design of wideband circuits
- Diffused emitter ballasting resistors provide excellent current sharing and withstanding at a high VSWR
- Interdigitated structure provides high emitter efficiency
- Gold metallization realizes very good stability of the characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance.

APPLICATIONS

Intended for use in common emitter class AB power amplifiers for military and professional applications at frequencies from 1.6 to 1.85 GHz, in CW conditions.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT439A metal ceramic flange package with emitter connected to flange.

QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common emitter class AB amplifier.

MODE OF OPERATION	f (GHz)	V_{CE} (V)	I_{CQ} (A)	P_{L1} (W)	G_{PO} (dB)
Class AB (CW)	1.85	24	0.3	≥ 27	≥ 8

PINNING - SOT439A

PIN	DESCRIPTION
1	collector
2	base
3	emitter connected to flange

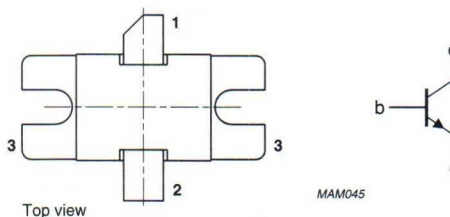


Fig.1 Simplified outline and symbol.

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

NPN microwave power transistor

LXE18300X



LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V _{CBO}	collector-base voltage	open emitter	–	45	V
V _{CER}	collector-emitter voltage	R _{BE} = 220 Ω	–	30	V
V _{CEO}	collector-emitter voltage	open base	–	20	V
V _{EBO}	emitter-base voltage	open collector	–	3	V
I _C	collector current		–	6	A
P _{tot}	total power dissipation	T _{mb} = 75 °C	–	57	W
T _{stg}	storage temperature range		–65	+200	°C
T _j	operating junction temperature		–	200	°C
T _{slid}	soldering temperature	t ≤ 10 s; note 1	–	235	°C

Note

1. Up to 0.2 mm from ceramic.

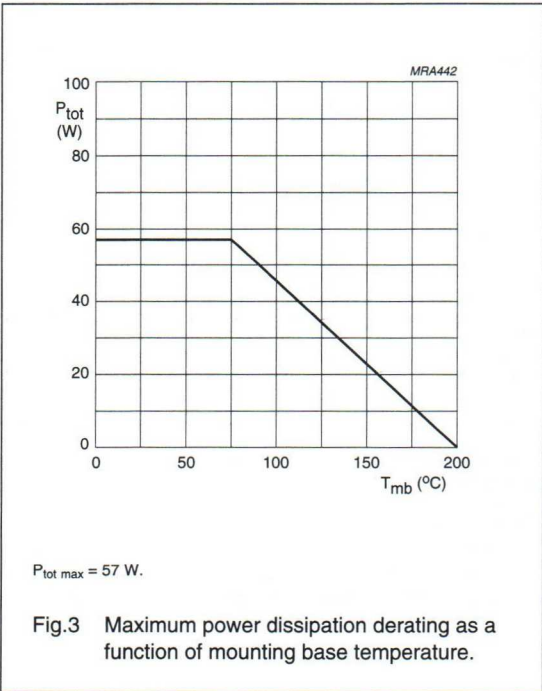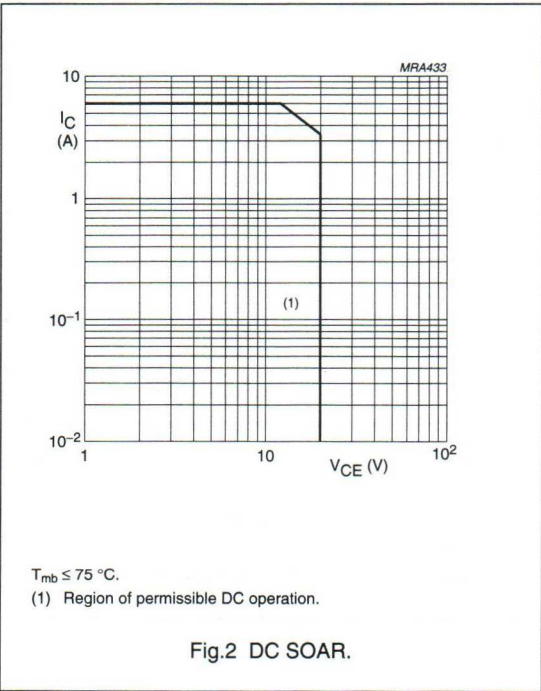

NPN microwave power transistor

LXE18300X

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	from junction to mounting base	$T_j = 100\ ^\circ\text{C}$	1.7	K/W
$R_{th\ mb-h}$	from mounting base to heatsink	note 1	0.2	K/W

Note

1. See "Mounting recommendations in the General part of handbook SC15".

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 20\ \text{V}; I_E = 0$	—	3	mA
		$V_{CB} = 40\ \text{V}; I_E = 0$	—	30	mA
I_{CER}	collector cut-off current	$V_{CE} = 30\ \text{V}; R_{BE} = 220\ \Omega$	—	30	mA
I_{CEO}	collector cut-off current	$V_{CE} = 20\ \text{V}; I_B = 0$	—	30	mA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\ \text{V}; I_C = 0$	—	300	μA
h_{FE}	DC current gain	$V_{CE} = 3\ \text{V}; I_C = 3\ \text{A}$	20	100	

APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ in a common emitter class AB amplifier.

MODE OF OPERATION	f (GHz)	V_{CE} (V)	I_{CQ} (A)	P_{L1} (W)	G_{PO} (dB)
Class AB (CW)	1.85	24	0.3	≥ 27 ; typ. 30	≥ 8 ; typ. 9

NPN microwave power transistor

LZ1418E100R

FEATURES

- Interdigitated structure provides high emitter efficiency
- Diffused emitter ballasting resistor provides excellent current sharing and withstanding a high VSWR
- Gold metallization realizes very stable characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance
- Internal input and output prematching ensures good stability and allows an easier design of wideband circuits.

APPLICATIONS

- Common emitter class A amplifiers in CW conditions for military and professional applications between 1.4 to 1.8 GHz.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT443A metal ceramic flange package with the emitter connected to the flange.

PINNING - SOT443A

PIN	DESCRIPTION
1	collector
2	base
3	emitter connected to flange

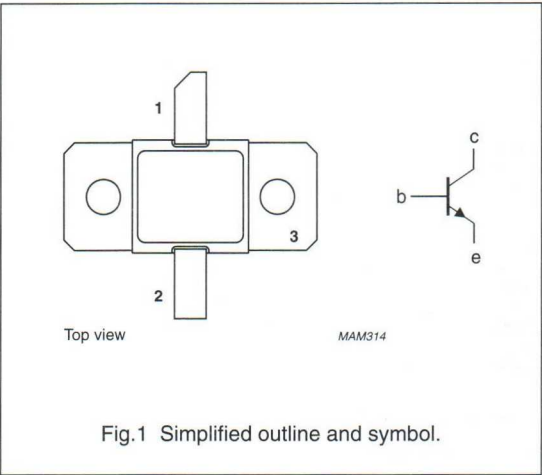


Fig.1 Simplified outline and symbol.

QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common emitter class A wideband amplifier.

MODE OF OPERATION	f (GHz)	V _{CE} (V)	I _C (A)	P _{L1} (W)	G _{po} (dB)	Z _i ; Z _L (Ω)
Class-A (CW)	1.4 to 1.8	16	2	≥9	≥10	see Fig 7

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.



NPN microwave power transistor

LZ1418E100R

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	—	45	V
V_{CER}	collector-emitter voltage	$R_{BE} = 220\ \Omega$	—	30	V
V_{CEO}	collector-emitter voltage	open base	—	20	V
V_{EBO}	emitter-base voltage	open collector	—	3	V
I_C	collector current (DC)		—	4	A
P_{tot}	total power dissipation	$T_{mb} \geq 75\ ^\circ\text{C}$	—	45	W
T_{stg}	storage temperature		−65	+200	$^\circ\text{C}$
T_j	operating junction temperature		—	200	$^\circ\text{C}$
T_{slid}	soldering temperature	at 0.2 mm from flange; $t \leq 10\text{ s}$	—	235	$^\circ\text{C}$

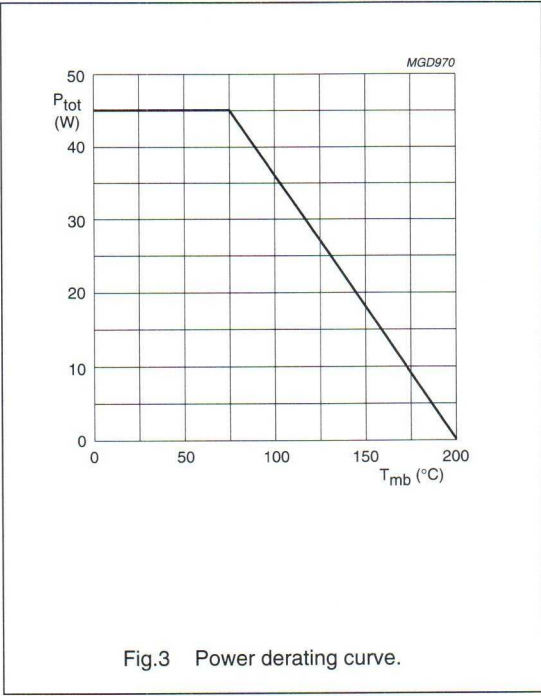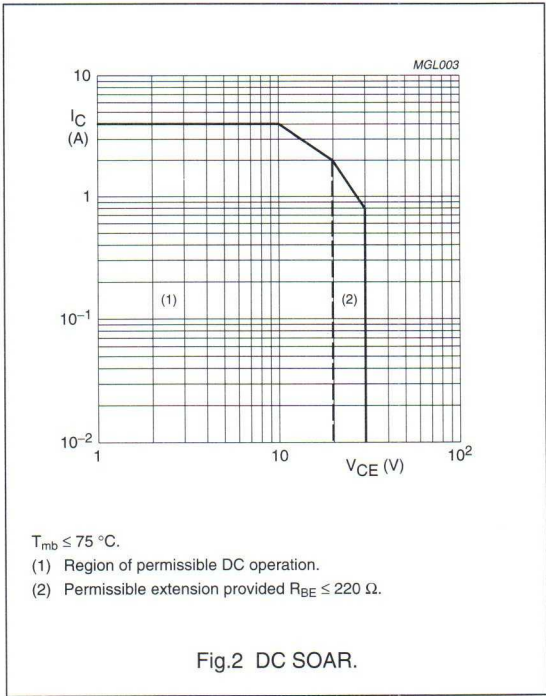

NPN microwave power transistor

LZ1418E100R

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting-base	$T_j = 75\ ^\circ\text{C}$	2.2	K/W
$R_{th\ mb-h}$	thermal resistance from mounting-base to heatsink	$T_j = 75\ ^\circ\text{C}$; note 1	0.2	K/W

Note

1. See "Mounting recommendations in the General part of handbook SC15".

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 20\ \text{V}; I_E = 0$	—	2	mA
		$V_{CB} = 40\ \text{V}; I_E = 0$	—	20	mA
I_{CER}	collector cut-off current	$V_{CE} = 30\ \text{V}; R_{BE} = 220\ \Omega$	—	20	mA
I_{CEO}	collector cut-off current	$V_{CE} = 20\ \text{V}; I_B = 0$	—	20	mA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\ \text{V}; I_C = 0$	—	200	μA
h_{FE}	DC current gain	$V_{CE} = 3\ \text{V}; I_C = 2\ \text{A}$	15	—	100

APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ in a common emitter class-A wideband amplifier; note 1.


MODE OF OPERATION	f (GHz)	V_{CE} (V)	I_C (A)	P_{L1} (W)	G_{po} (dB)	$Z_i; Z_L$ (Ω)
Class-A (CW)	1.4 to 1.8	16	2	≥ 9 typ. 10	≥ 10 typ. 11	see Fig 7

Note

1. Amplifier consists of test circuit board without any additional tuning.

NPN microwave power transistor

LZ1418E100R

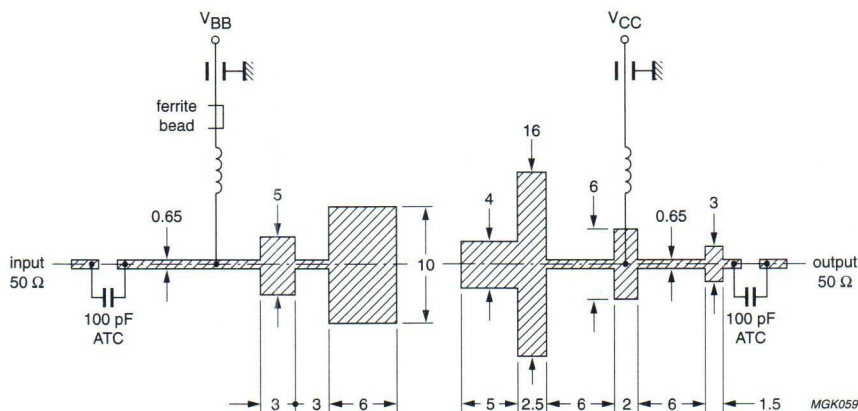

Dimensions in mm.

Substrate: Epsilam printed-circuit board.

Thickness: 0.635 mm.

Permittivity: $\epsilon_r = 10$.

Fig.4 Wideband test circuit board for 1.4 to 1.8 GHz, CW class A application.

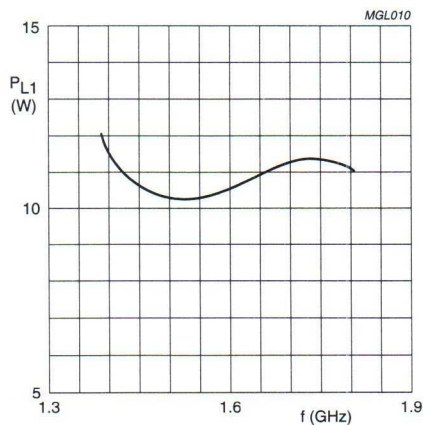
 $V_{CE} = 16$ V; $I_C = 2$ A (regulated); $T_{mb} = 25$ °C.

Fig.5 Load power as a function of frequency; typical values.


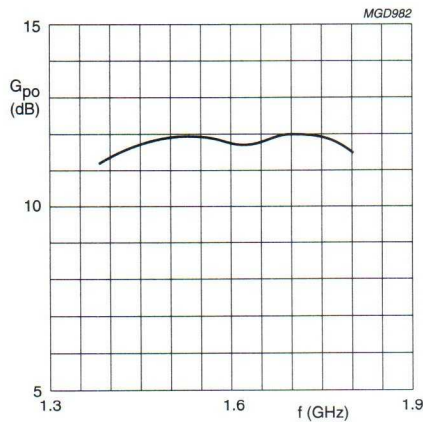
 $V_{CE} = 16$ V; $I_C = 2$ A (regulated); $T_{mb} = 25$ °C.

Fig.6 Linear power gain as a function of frequency; typical values.

NPN microwave power transistor

LZ1418E100R

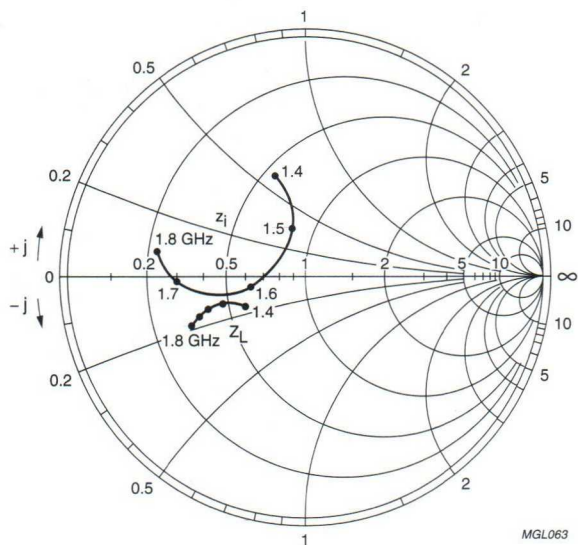

$Z_0 = 10 \Omega$; $V_{CE} = 16 \text{ V}$; $I_C = 2 \text{ A}$ (regulated); $T_{mb} = 25^\circ\text{C}$.

Fig.7 Input and load impedances as functions of frequency; typical values.

Microwave power transistor

MF1011B900Y

FEATURES

- Suitable for short and medium pulse applications up to 100 μ s pulse width, duty factor 10%
- Diffused emitter ballasting resistors improve ruggedness
- Interdigitated emitter-base structure provides high emitter efficiency
- Gold metallization with barrier realizes very stable characteristics and excellent lifetime
- Multicell geometry improves power sharing and reduces thermal resistance
- Internal input and output prematching networks allow an easier design of circuits.

APPLICATIONS

Intended for use in common base class C broadband pulsed power amplifiers for IFF, TCAS and Mode S applications in the 1030 MHz to 1090 MHz band. Also suitable for medium pulse, heavy duty operation within this band.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT448A glued cap metal ceramic flange package, with base connected to flange.


QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common-base class C narrowband amplifier.

MODE OF OPERATION	CONDITIONS	f (GHz)	V _{CC} (V)	P _L (W)	G _p (dB)	η_c (%)
Class C	$t_p = 10\text{ }\mu\text{s};$ $\delta = 1\%$	1.09	50	800	≥ 6	≥ 40

PINNING - SOT448A

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

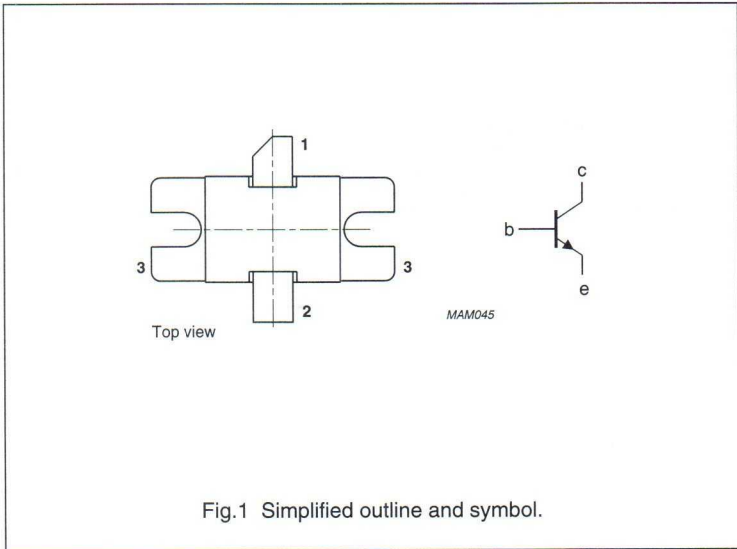

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

Microwave power transistor

MF1011B900Y


LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V _{CBO}	collector-base voltage	open emitter	–	65	V
V _{CES}	collector-emitter voltage	R _{BE} = 0	–	65	V
V _{CEO}	collector-emitter voltage	open base	–	15	V
V _{EBO}	emitter-base voltage	open collector	–	3	V
I _{CM}	peak collector current	t _p = 10 μs; δ = 1%	–	50	A
P _{tot}	total power dissipation	T _{mb} < 75 °C; t _p ≤ 10 μs; δ ≤ 1%	–	1750	W
T _{stg}	storage temperature		–65	+200	°C
T _j	junction temperature		–	200	°C
T _{slid}	soldering temperature	t ≤ 10 s; note 1	–	235	°C

Note

1. Up to 0.2 mm from ceramic.

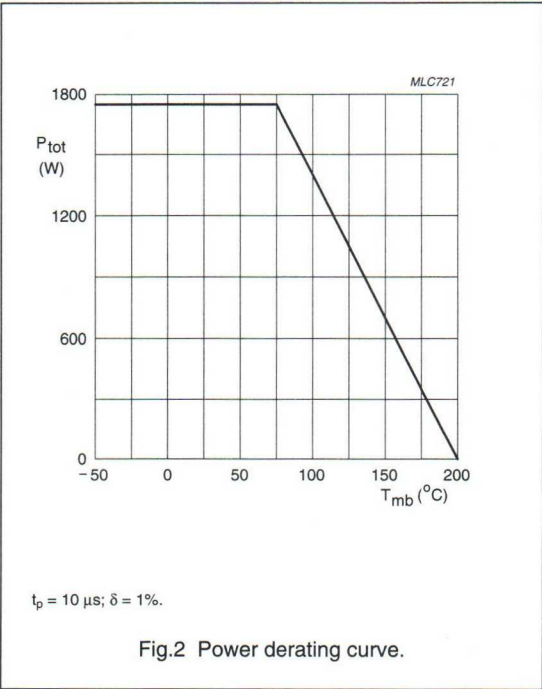

Microwave power transistor

MF1011B900Y

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	$T_j = 120\ ^\circ\text{C}$	0.84	K/W
$R_{th\ mb-h}$	thermal resistance from mounting base to heatsink	note 1	0.2	K/W
Z_{th}	thermal impedance from junction to heatsink	$t_p = 10\ \mu\text{s}; \delta = 1\%$; notes 1 and 2	0.01	K/W

Notes

1. See "Mounting recommendations in the General part of handbook SC15".
2. Equivalent thermal impedance under pulsed microwave operating conditions.

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
I_{CBO}	collector cut-off current	$I_E = 0; V_{CB} = 50\ \text{V}$	27	mA
I_{CES}	collector cut-off current	$V_{BE} = 0; V_{CE} = 50\ \text{V}$	27	mA
I_{EBO}	emitter cut-off current	$I_C = 0; V_{EB} = 1.5\ \text{V}$	7	mA
$V_{(BR)CBO}$	collector-base breakdown voltage	$I_C = 180\ \text{mA}$	65	V
$V_{(BR)CES}$	collector-emitter breakdown voltage	$I_C = 180\ \text{mA}; V_{BE} = 0$	65	V


APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ in a common-base test circuit as shown in Fig.3.

MODE OF OPERATION	CONDITIONS	f (GHz)	V_{CC} (V)	P_L (W)	G_p (dB)	η_c (%)
Class C	$t_p = 10\ \mu\text{s}; \delta = 1\%$	1.09	50	≥ 800 typ. 900	≥ 6 typ. 6.5	≥ 40 typ. 48
	$t_p = 0.5\ \mu\text{s}; \delta = 50\%$	1.03 to 1.09	50	typ. 750	typ. 5.7	typ. 36
	$t_p = 112\ \mu\text{s}; \delta = 1\%$					
	$t_p = 32\ \mu\text{s}; \delta = 1\%$	1.09	50	typ. 870	typ. 6.3	typ. 46

Microwave power transistor

MF1011B900Y

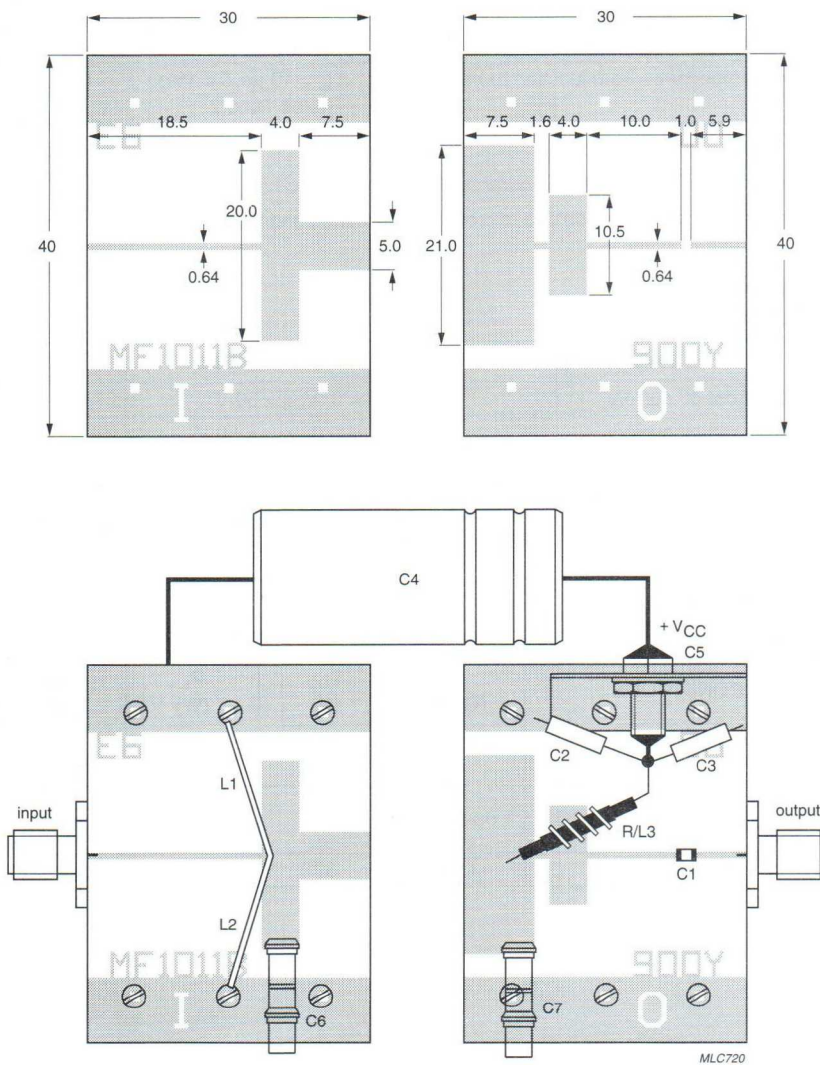

Dimensions in mm.
 Substrate: Epsilam 10.
 Thickness: 0.635 mm.
 Permittivity: $\epsilon_r = 10$.



Fig.3 Broadband test circuit.

Microwave power transistor

MF1011B900Y

List of components (see Fig.3)

COMPONENT	DESCRIPTION	VALUE	ORDERING INFORMATION
C1	capacitor	100 pF	ATC 100A101kp50x
C2,C3	tantalum capacitor	10 μ F; 50 V	
C4	electrolytic capacitor	1 mF; 63 V	
C5	feedthrough bypass capacitor		Erie 1250-003
C6, C7	variable gigatrim capacitor	0.8 to 8 pF	Tekelec 729-1
L1, L2	0.65 mm copper wire; total length = 26 mm; height of loop = 10 mm		
L3	4 turns 0.65 mm copper wire; total length = 48 mm		
R	resistor	4.7 Ω ; 0.5 W	

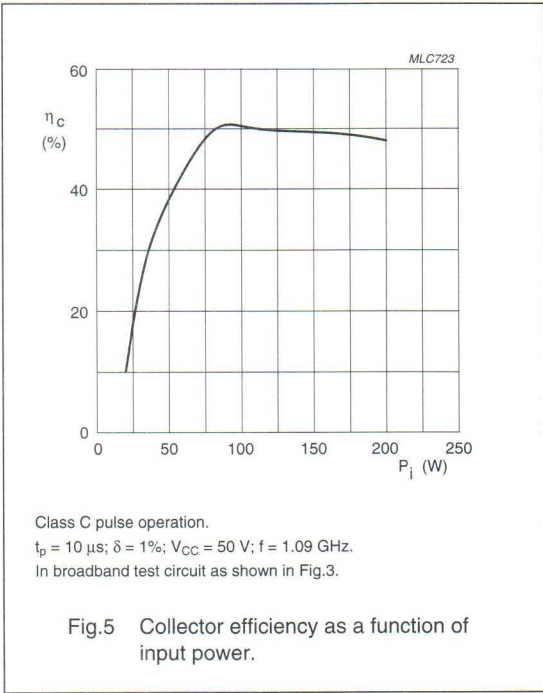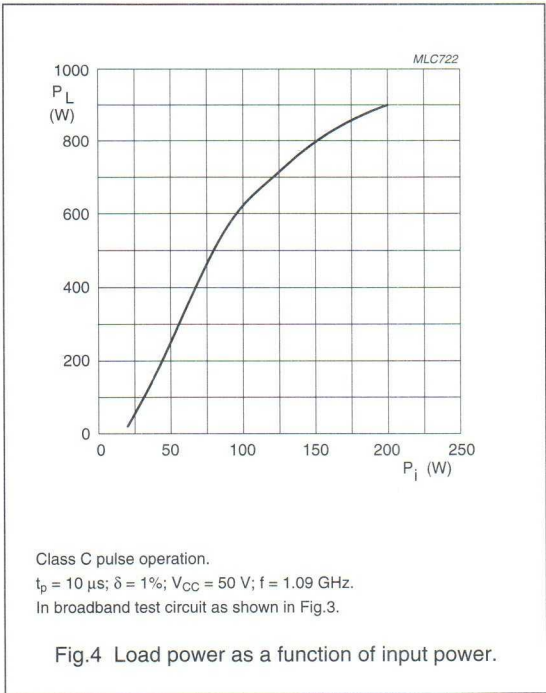


Microwave power transistor

MF1011B900Y

Input and optimum load impedances

$V_{CE} = 50\text{ V}$; typical values at $P_L = P_{L1}$ (see Figs 6 and 7).

f (GHz)	Z_i (Ω)	Z_L (Ω)
1.03	$0.22 + j0.19$	$0.14 - j0.10$
1.09	$0.23 + j0.12$	$0.12 - j0.08$
1.15	$0.19 + j0.06$	$0.09 - j0.09$

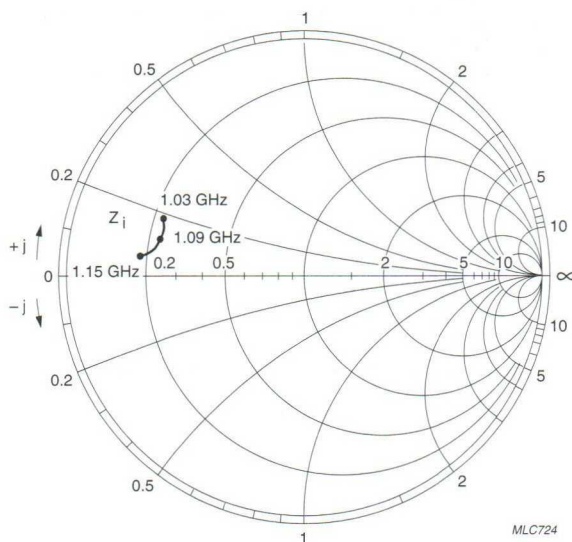


$V_{CC} = 50\text{ V}$; $Z_o = 10\ \Omega$; $P_o = 240\text{ W}$.

Fig.6 Input impedance as a function of frequency.

Microwave power transistor

MF1011B900Y

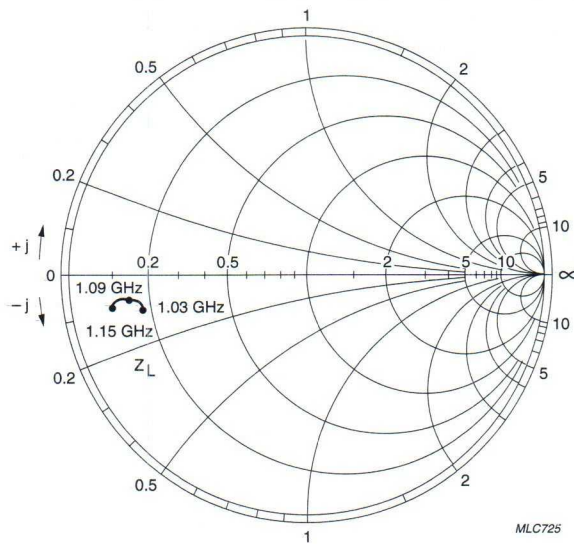

$V_{CC} = 50 \text{ V}$; $Z_0 = 50 \Omega$; $P_o = 240 \text{ W}$.

Fig.7 Optimum load impedance as a function of frequency.

NPN microwave power transistor

MTB10010U

FEATURES

- Input prematching cell allows an easier design of circuits
- Diffused emitter ballasting resistors providing excellent current sharing and withstanding a high VSWR
- Interdigitated structure provides high emitter efficiency
- Gold metallization realizes very good characteristics stability and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance.

APPLICATIONS

Common base class C narrowband pulsed power amplifiers at 1 030 MHz for IFF applications.

DESCRIPTION

NPN silicon planar epitaxial microwave transistor with internal input prematching cell in a SOT440A metal ceramic package with base connected to flange.


QUICK REFERENCE DATA

Microwave performance for $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common base class C narrowband amplifier.

MODE OF OPERATION	CONDITIONS	f (MHz)	V _{CC} (V)	P _L (W)	G _{PO} (dB)	η_C (%)	Z _i /Z _L (Ω)
Class C	$t_p = 1\text{ }\mu\text{s}$; $\delta = 1\%$	1030	24	>9.5	>9.5	>50	see Figs 5 and 6

PINNING - SOT440A

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

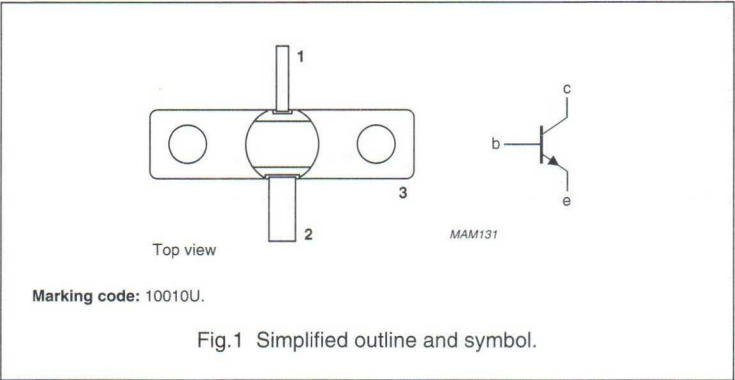

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

NPN microwave power transistor

MTB10010U


LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V _{CBO}	collector-base voltage	open emitter	—	40	V
V _{CEO}	collector-emitter voltage	open base	—	15	V
V _{CES}	collector-emitter voltage	R _{BE} = 0 Ω	—	40	V
V _{EBO}	emitter-base voltage	open collector	—	3	V
I _C	collector current (average)		—	0.75	A
P _{tot}	total power dissipation	T _{mb} < 75 °C; t _p = 1 μs; δ = 1%	—	36	W
T _{stg}	storage temperature		−65	+200	°C
T _j	junction temperature		—	200	°C
T _{slid}	soldering temperature	t ≤ 10 s; note 1	—	235	°C


Note

1. Up to 0.3 mm from ceramic.

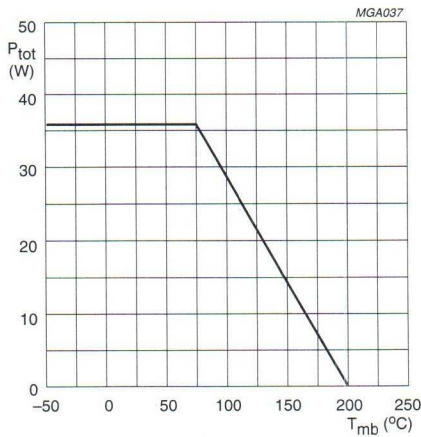

P_{tot max} = 36 W under the nominal pulse conditions.

Fig.2 Power derating curve.

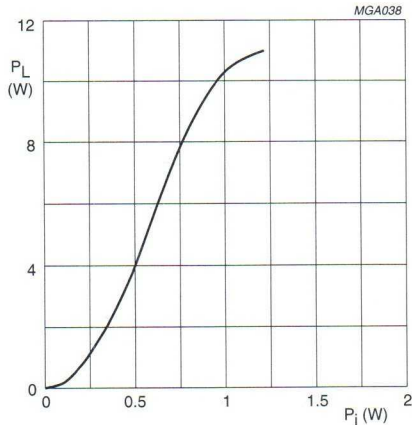

V_{CC} = 24 V; t_p = 1 μs; δ = 1%; f = 1 030 MHz.

Fig.3 Load power as a function of input power.

NPN microwave power transistor

MTB10010U

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	$T_j = 100\ ^\circ\text{C}$	10.5	K/W
$R_{th\ mb-h}$	thermal resistance from mounting base to heatsink	note 1	0.7	K/W
$Z_{th\ j-mb}$	thermal impedance from junction to mounting base	$t_p = 1\ \mu\text{s}$; $\delta = 1\%$; note 1	2.5	K/W

Note

1. See "Mounting recommendations in the General part of handbook SC15".

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 30\ \text{V}$; $I_E = 0$	45	μA
I_{CES}	collector cut-off current	$V_{CE} = 30\ \text{V}$; $R_{BE} = 0$	300	μA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\ \text{V}$; $I_C = 0$	4.5	μA

APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ and working in pulsed conditions in a narrowband test circuit as shown in Fig.4.



MODE OF OPERATION	CONDITIONS	f (MHz)	V_{CC} (V)	P_L (W)	G_{po} (dB)	η_c (%)	Z/Z_L (Ω)
Class C	$t_p = 1\ \mu\text{s}$; $\delta = 1\%$	1030	24	>9.5; typ. 11	>9.5; typ. 10	>50; typ. 55	see Figs 5 and 6

List of components (see Fig.4)

COMPONENT	DESCRIPTION	VALUE	DIMENSIONS	CATALOGUE NO.
L1	0.4 mm diameter copper wire	—	rectangular loop	—
C1	tuning capacitor	0.5 – 5 pF	—	Tekelec 5855
C2	chip capacitor	3 pF	—	Eurofarad CEC 23
C3	chip capacitor	10 pF	—	Eurofarad CEC 23
C4	chip capacitor	47 pF	—	Eurofarad CEC 23
C5	tantalum capacitor	10 μF , 50 V	—	—
C6	feedthrough bypass capacitor	—	—	Erie 1250-003
C7	capacitor	220 μF , 63 V	—	—

NPN microwave power transistor

MTB10010U

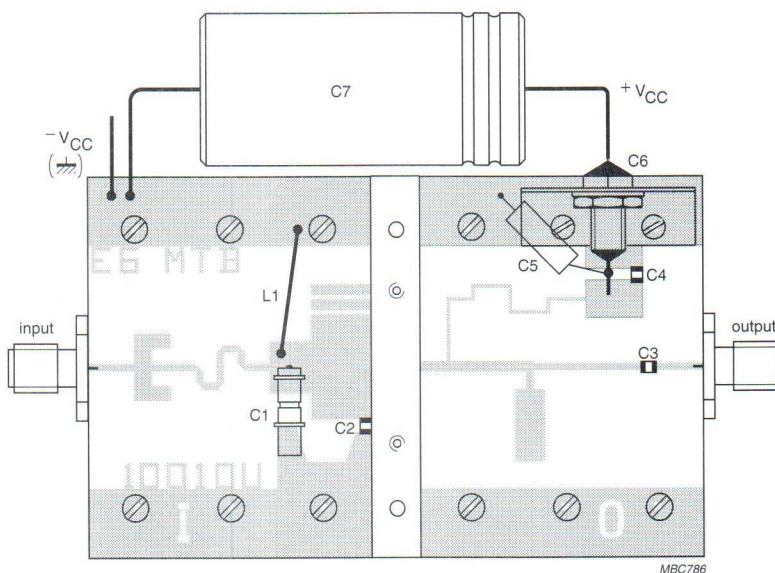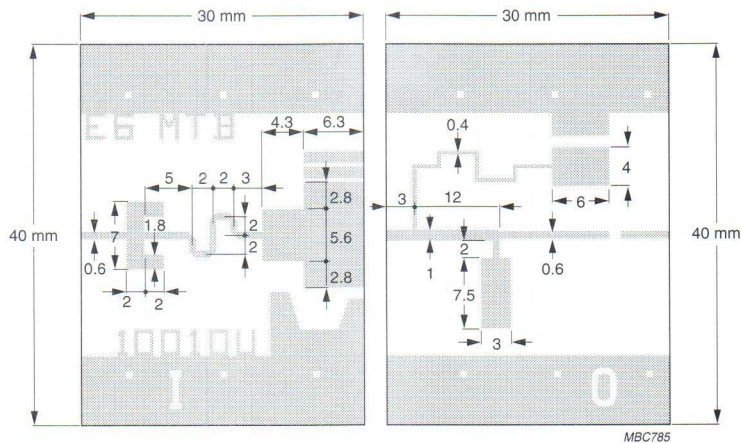


Dimensions in mm.
Substrate: Duroid 6010.
Permittivity: $\epsilon_r = 10.2$.

Fig.4 Narrowband test circuit.


NPN microwave power transistor

MTB10010U

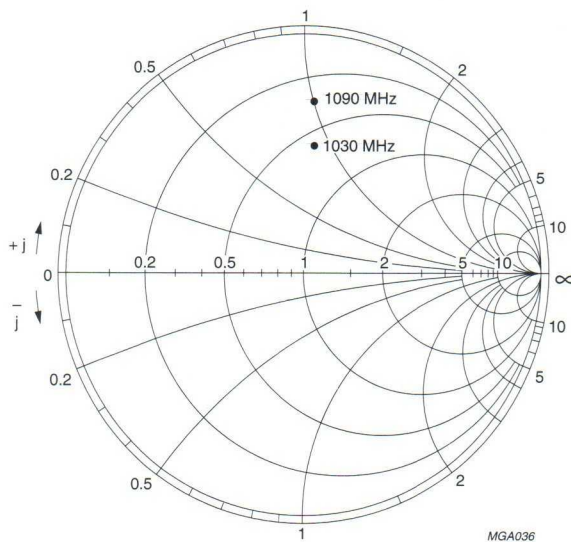

$V_{CC} = 24 \text{ V}$; $Z_O = 5 \Omega$; $P_L = 10 \text{ W}$.

Fig.5 Input impedance as a function of frequency, associated with optimum load impedance.

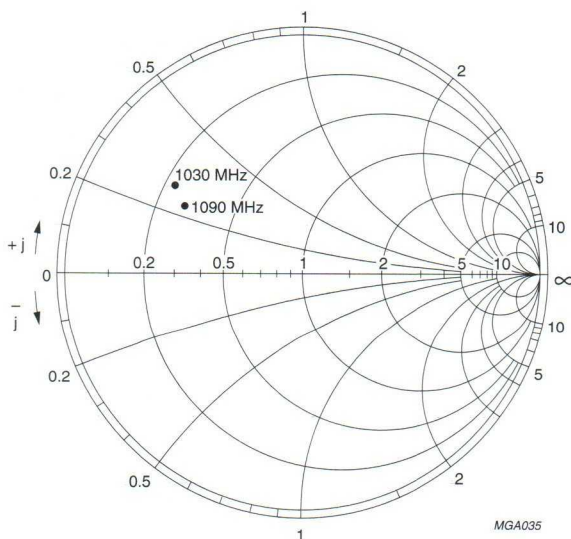

$V_{CC} = 24 \text{ V}$; $Z_O = 50 \Omega$; $P_L = 10 \text{ W}$.

Fig.6 Optimum load impedance as a function of frequency; associated with input impedance.

NPN microwave power transistors

MX0912B100Y; MZ0912B100Y

FEATURES

- Interdigitated structure provides high emitter efficiency
- Diffused emitter ballasting resistors providing excellent current sharing and withstanding a high VSWR
- Gold metallization realizes very stable characteristics and excellent lifetime
- Multicell geometry improves power sharing and low thermal resistance
- Input and output matching cell allows an easier design of circuits.

APPLICATIONS

- Common base class-C broadband pulse power amplifiers operating at 960 to 1215 MHz for TACAN application.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistors.

The MX0912B100Y has a SOT439A metal ceramic flange package and improved output prematching cells. It is recommended for new designs.

The MZ0912B100Y has a SOT443A metal ceramic flange package with the base connected to the flange. It is mounted in common base configuration and specified in class C.

PINNING

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

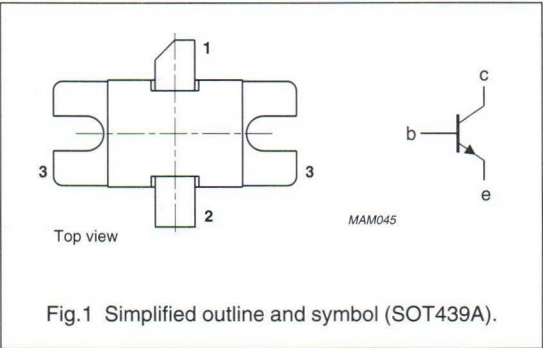


Fig.1 Simplified outline and symbol (SOT439A).

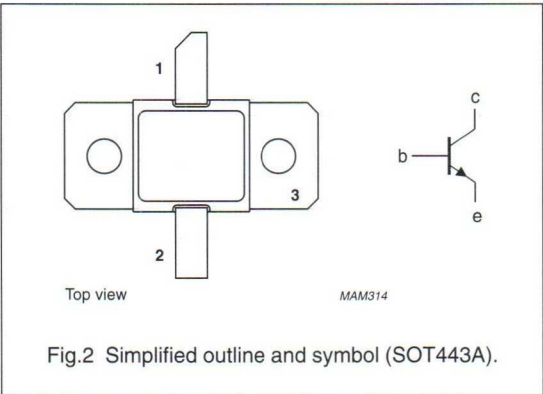


Fig.2 Simplified outline and symbol (SOT443A).

QUICK REFERENCE DATA

Microwave performance at $T_{mb} \leq 25^\circ\text{C}$ in a common base class-C broadband amplifier.

MODE OF OPERATION	f (GHz)	V _{CC} (V)	P _L (W)	G _p (dB)	η_c (%)	Z _i ; Z _L (Ω)
Class-C; $t_p = 10\ \mu\text{s}$; $\delta = 10\%$	0.960 to 1.215	50	>100	>7	>42	see Figs 8 and 9

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.


NPN microwave power transistors

MX0912B100Y; MZ0912B100Y

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V _{CBO}	collector-base voltage	open emitter	—	65	V
V _{CES}	collector-emitter voltage	R _{BE} = 0 Ω	—	60	V
V _{CEO}	collector-emitter voltage	open base	—	20	V
V _{EBO}	emitter-base voltage	open collector	—	3	V
I _C	collector current (DC)	t _p ≤ 10 μs; δ ≤ 10 %	—	6	A
P _{tot}	total power dissipation (peak power)	t _p ≤ 10 μs; δ ≤ 10 %; T _{mb} = 75 °C	—	290	W
T _{stg}	storage temperature		−65	+200	°C
T _j	operating junction temperature		—	200	°C
T _{slid}	soldering temperature	up to 0.2 mm from ceramic; t ≤ 10 s	—	235	°C

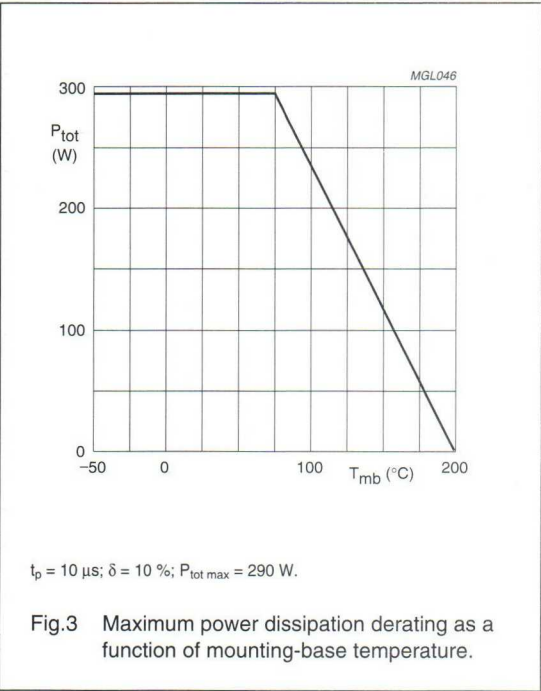

NPN microwave power transistors

MX0912B100Y; MZ0912B100Y

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting-base	$T_j = 125\ ^\circ\text{C}$	3.2	K/W
$R_{th\ mb-h}$	thermal resistance from mounting-base to heatsink	$T_j = 125\ ^\circ\text{C}$; note 1	0.2	K/W
$Z_{th\ j-h}$	thermal impedance from junction to heatsink	$t_p = 10\ \mu\text{s}$; $\delta = 10\ \%$; $T_j = 125\ ^\circ\text{C}$; notes 1 and 2	0.43	K/W

Notes

1. See "Mounting recommendations in the General part of handbook SC15".
2. Equivalent thermal impedance under pulsed microwave operating conditions.

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 65\ \text{V}$; $I_E = 0$	40	mA
		$V_{CB} = 50\ \text{V}$; $I_E = 0$	4	mA
I_{CES}	collector cut-off current	$V_{CB} = 60\ \text{V}$; $R_{BE} = 0$	40	mA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\ \text{V}$; $I_C = 0$	400	μA

APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ measured in the test jig as shown in Fig.7 and working in class C broadband in pulse mode; note 1.


MODE OF OPERATION	f (GHz)	V_{CC} (V) ⁽²⁾	P_L (W)	G_p (dB)	η_c (%)	Z_i/Z_L (Ω)
Class C; $t_p = 10\ \mu\text{s}$; $\delta = 10\ \%$	0.960 to 1.215	50	≥ 100 typ. 115	≥ 7 typ. 7.6	≥ 42 typ. 44	see Figs 8 and 9
$t_p = 300\ \mu\text{s}$; $\delta = 10\ \%$; see Fig.6	1.03 to 1.09	50	typ. 125	typ. 8	typ. 50	

Notes

1. Operating conditions and performance for other pulse formats can be made available on request.
2. V_{CC} during pulse.


NPN microwave power transistors

MX0912B100Y; MZ0912B100Y

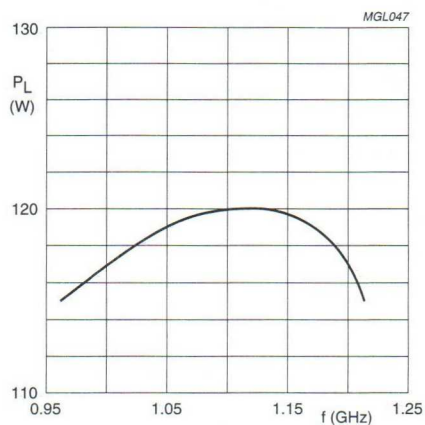

$V_{CC} = 50$ V; $t_p = 10$ μ s; $\delta = 10\%$.

Fig.4 Load power as a function of frequency. (In broadband test circuit as shown in Fig.7)

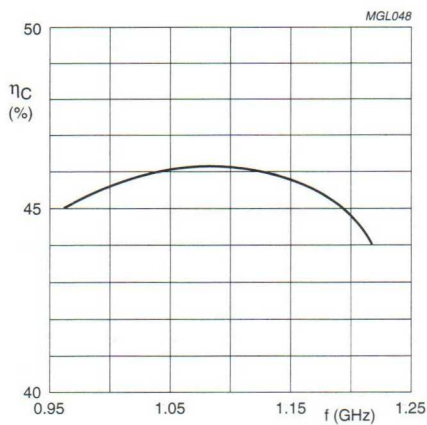

$V_{CC} = 50$ V; $t_p = 10$ μ s; $\delta = 10\%$.

Fig.5 Collector efficiency as a function of frequency. (In broadband test circuit as shown in Fig.7)

NPN microwave power transistors

MX0912B100Y; MZ0912B100Y

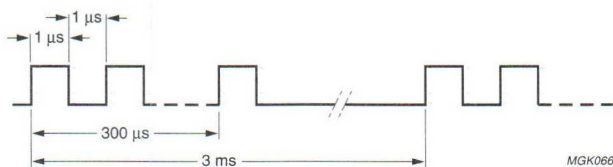



Fig.6 Pulse definition.

List of components

COMPONENT	DESCRIPTION	VALUE	DIMENSIONS	CATALOGUE NO.
L1	0.65 mm diameter copper wire	—	total length = 12 mm; height of loop = 12 mm	—
L2	4 turns 0.65 mm diameter copper wire	—	int. dia. 3 mm; L = 5 mm	—
C1	capacitor	100 pF	—	ATC, ref. 100A101KP50X
C2	tantalum capacitor	10 μF; 50 V	—	—
C3	electrolytic capacitor	470 μF; 63 V	—	—
C4	feedthrough bypass capacitor	—	—	Erie, ref. 1250-003
C5, C6	variable gigatrim capacitor	0.6 to 4.5 pF	—	Tekelec, ref. 727.1

NPN microwave power transistors

MX0912B100Y; MZ0912B100Y

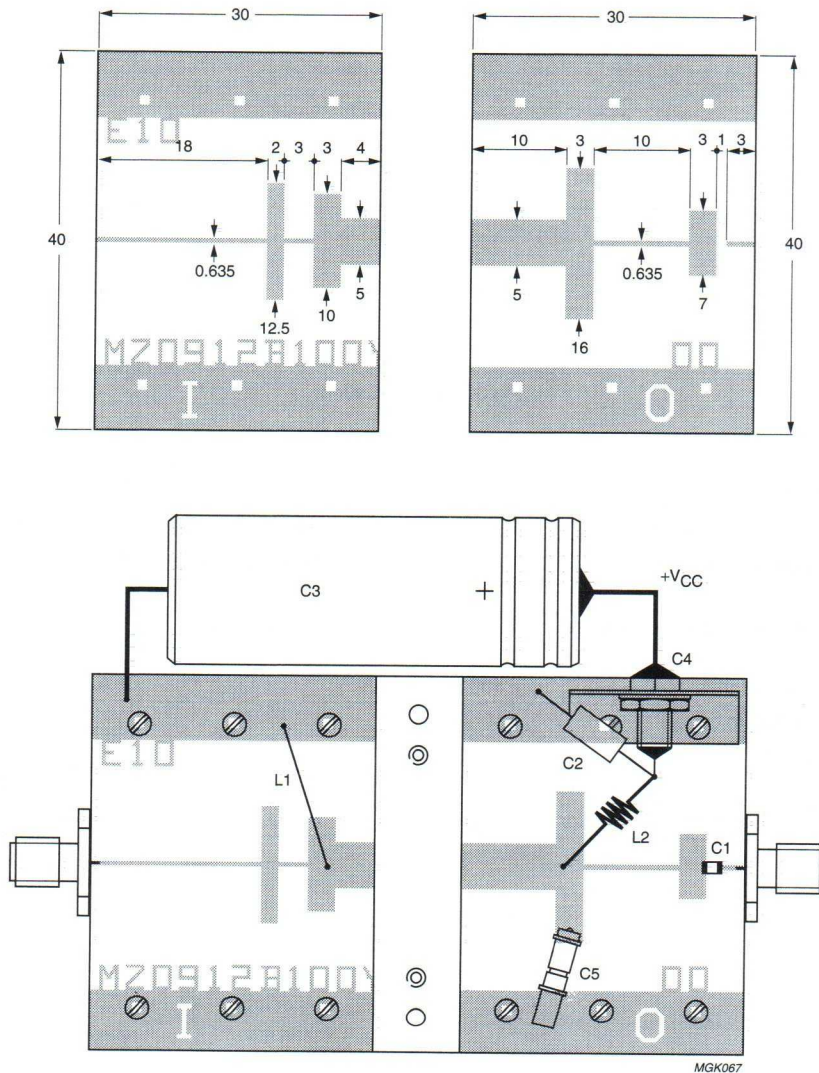


Dimensions in mm.
 Substrate: Epsilam 10.
 Thickness: 0.635 mm.
 Permittivity: $\epsilon_r = 10$.

Fig.7 Broadband test circuit.


NPN microwave power transistors

MX0912B100Y; MZ0912B100Y

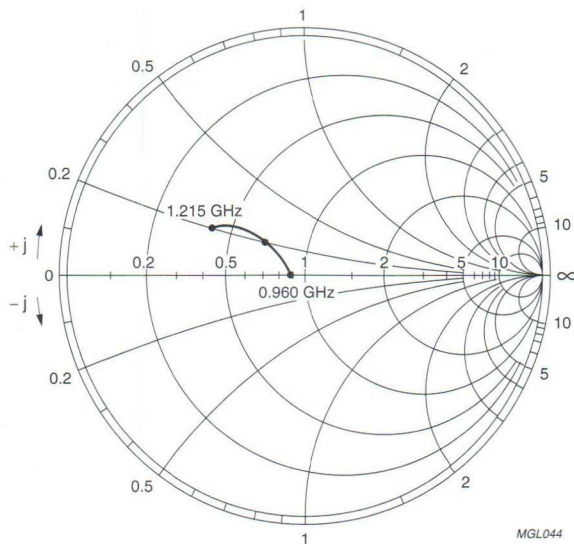

$V_{CC} = 50 \text{ V}$; $Z_0 = 10 \Omega$; $P_L = 100 \text{ W}$.

Fig.8 Input impedance as a function of frequency associated with optimum load impedance.

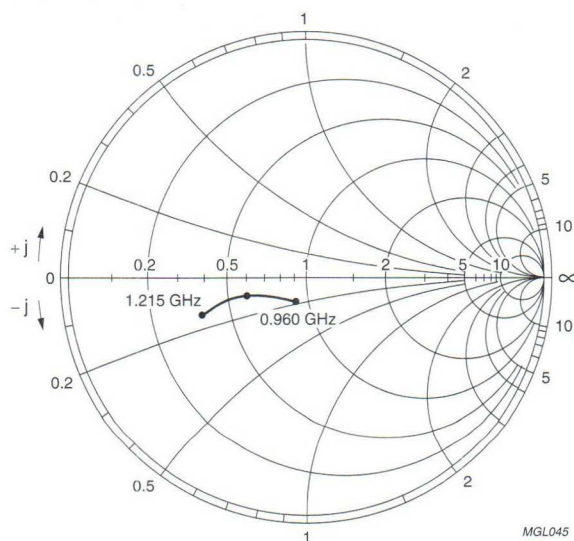

$V_{CC} = 50 \text{ V}$; $Z_0 = 10 \Omega$; $P_L = 100 \text{ W}$.

Fig.9 Optimum load impedance as a function of frequency associated with input impedance.

NPN microwave power transistor

MX0912B251Y

FEATURES

- Interdigitated structure; high emitter efficiency
- Diffused emitter ballasting resistors providing excellent current sharing and withstanding a high VSWR
- Gold metallization realizes very stable characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance
- Input and output matching cell allows an easier design of circuits.

APPLICATIONS


Intended for use in common base class C broadband pulse power amplifier from 960 to 1215 MHz for TACAN application.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT439A metal ceramic flange package, with base connected to flange. It is mounted in common base configuration, and specified in class C.

PINNING - SOT439A

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

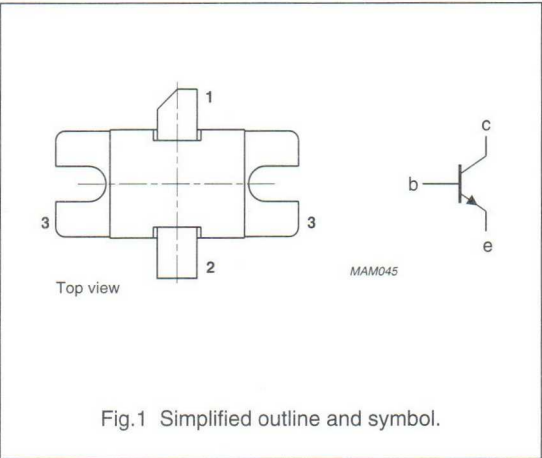

QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common base class C broadband amplifier.

MODE OF OPERATION	f (GHz)	V _{CC} (V)	P _L (W)	G _{po} (dB)	η_c (%)	Z _i /Z _L (Ω)
Class C $t_p = 10\text{ }\mu\text{s}$; $\delta = 10\%$	0.960 to 1.215	50	>235	>7	>42	see Figs 7 and 8

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

NPN microwave power transistor

MX0912B251Y


LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V _{CBO}	collector-base voltage	open emitter	–	65	V
V _{CES}	collector-emitter voltage	R _{BE} = 0 Ω	–	60	V
V _{CEO}	collector-emitter voltage	open base	–	20	V
V _{EBO}	emitter-base voltage	open collector	–	3	V
I _C	collector current	t _p ≤ 10 μs; δ ≤ 10%	–	15	A
P _{tot}	total power dissipation (peak power)	T _{mb} = 75 °C; t _p ≤ 10 μs; δ ≤ 10%	–	690	W
T _{stg}	storage temperature		–65	+200	°C
T _j	operating junction temperature		–	200	°C
T _{slid}	soldering temperature	t ≤ 10 s; note 1	–	235	°C

Note

1. Up to 0.2 mm from ceramic.

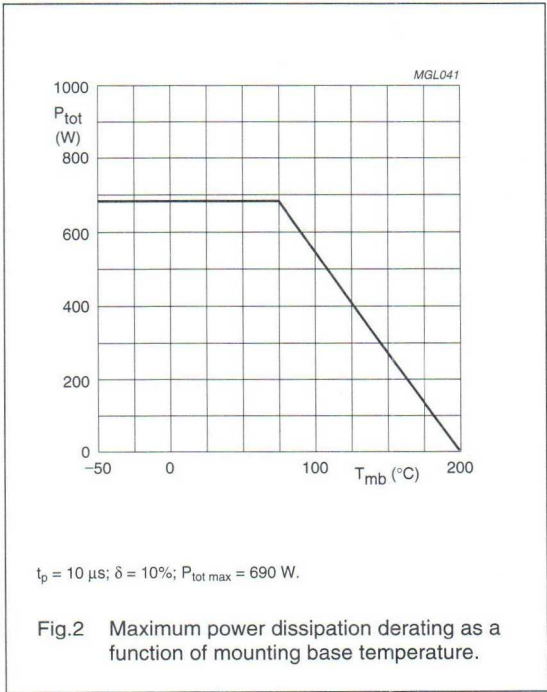

NPN microwave power transistor

MX0912B251Y

THERMAL CHARACTERISTICS

 $T_J = 125\text{ }^{\circ}\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	CW	1.9	K/W
$R_{th\ mb-h}$	thermal resistance from mounting base to heatsink	CW; note 1	0.2	K/W
$Z_{th\ j-h}$	thermal impedance from junction to heatsink	$t_p = 10\text{ }\mu\text{s}$; $\delta = 10\%$ notes 1 and 2	0.28	K/W

Notes

1. See "Mounting recommendations in the General part of handbook SC15".
2. Equivalent thermal impedance under nominal pulse microwave operating conditions.

CHARACTERISTICS

 $T_{mb} = 25\text{ }^{\circ}\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 65\text{ V}$; $I_E = 0$	100	mA
		$V_{CB} = 50\text{ V}$; $I_E = 0$	10	mA
I_{CES}	collector cut-off current	$V_{CE} = 60\text{ V}$; $R_{BE} = 0$	100	mA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\text{ V}$; $I_C = 0$	1	mA

APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ measured in the test jig as shown in Fig.6 and working in class C broadband mode in pulse; note 1.

MODE OF OPERATION	f (GHz)	V_{CC} (V) ⁽²⁾	P_L (W)	G_{po} (dB)	η_C (%)	Z_i/Z_L (Ω)
Class C; $t_p = 10\text{ }\mu\text{s}$; $\delta = 10\%$	0.960 to 1.215	50	>235 typ. 275	>7 typ. 7.4	>42 typ. 47	see Figs 7 and 8
$t_p = 300\text{ }\mu\text{s}$; $\delta = 10\%$; see Fig.5	1.03 to 1.09	50	typ. 280	typ. 8	typ. 48	

Notes

1. Operating conditions and performance for other pulse formats can be made available on request.
2. V_{CC} during pulse.

NPN microwave power transistor

MX0912B251Y

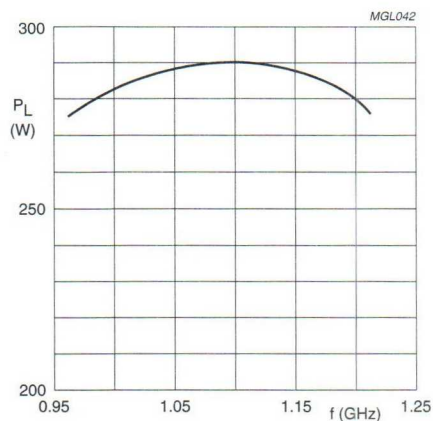
 $V_{CC} = 50$ V; $t_p = 10$ μ s; $\delta = 10\%$.

Fig.3 Load power as a function of frequency.
(In broadband test circuit as shown in Fig.6)

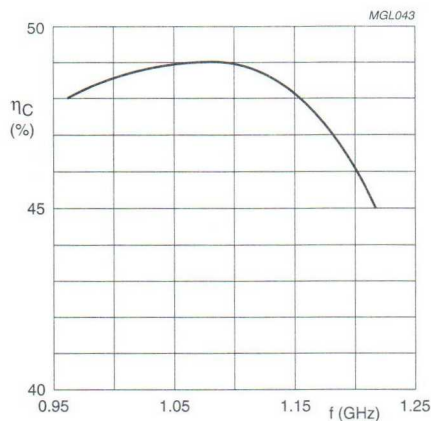
 $V_{CC} = 50$ V; $t_p = 10$ μ s; $\delta = 10\%$.

Fig.4 Collector efficiency as a function of frequency.
(In broadband test circuit as shown in Fig.6)

NPN microwave power transistor

MX0912B251Y

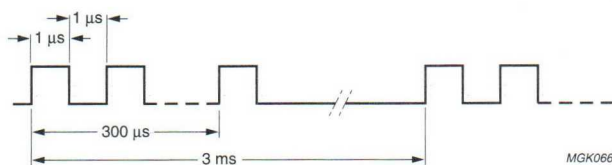



Fig.5 Pulse definition.

List of components

COMPONENT	DESCRIPTION	VALUE	DIMENSIONS	CATALOGUE NO.
L1, L2	0.65 mm diameter copper wire	—	total length = 12 mm; height of loop = 9 mm	—
L3	4 turns 0.65 mm diameter copper wire	—	int. diameter 3 mm; L = 5 mm	—
C1	DC block	100 pF		ATC, ref. 100A101KP50X
C2	tantalum capacitor	10 μF; 50 V		
C3	electrolytic capacitor	470 μF; 63 V		
C4	feedthrough bypass capacitor			Erie, ref. 1250-003
C5, C6	variable gigatrim capacitor	0.8 to 8 pF		Tekelec, ref. 729.1

NPN microwave power transistor

MX0912B251Y

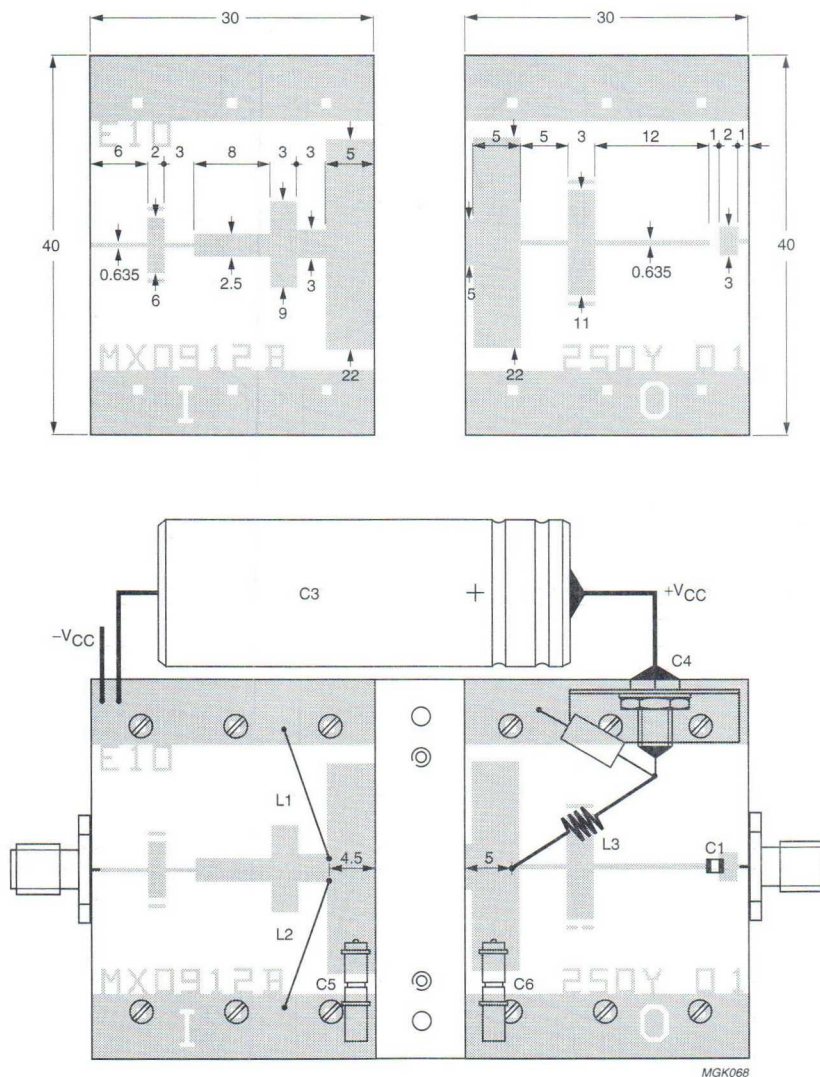


Dimensions in mm.
 Substrate: Epsilam 10.
 Thickness: 0.635 mm.
 Permittivity: $\epsilon_r = 10$.

Fig.6 Broadband test circuit.


NPN microwave power transistor

MX0912B251Y

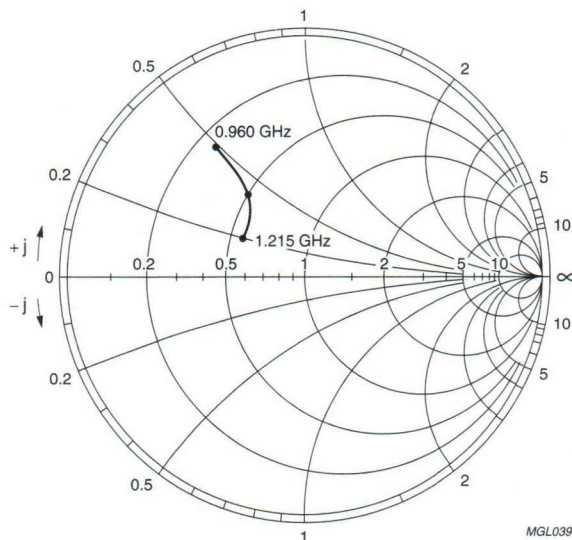

$V_{CC} = 50 \text{ V}$; $Z_o = 5 \Omega$; $P_L = 235 \text{ W}$.

Fig.7 Input impedance as a function of frequency associated with optimum load impedance.

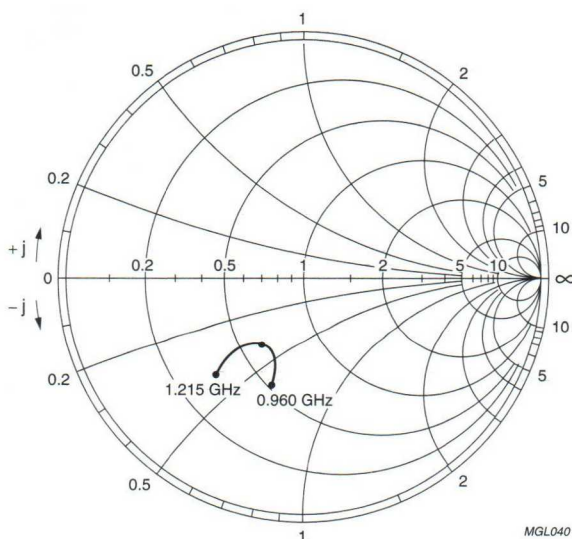

$V_{CC} = 50 \text{ V}$; $Z_o = 5 \Omega$; $P_L = 235 \text{ W}$.

Fig.8 Optimum load impedance as a function of frequency associated with input impedance.

NPN microwave power transistor

MX0912B351Y

FEATURES

- Interdigitated structure; high emitter efficiency
- Diffused emitter ballasting resistors providing excellent current sharing and withstanding a high VSWR
- Gold metallization realizes very stable characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance
- Input and output matching cell allows an easier design of circuits.

APPLICATIONS

Intended for use in common base class C broadband pulse power amplifier from 960 to 1215 MHz for TACAN application.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT439A metal ceramic flange package, with base connected to flange. It is mounted in common base configuration and specified in class C.

PINNING - SOT439A

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

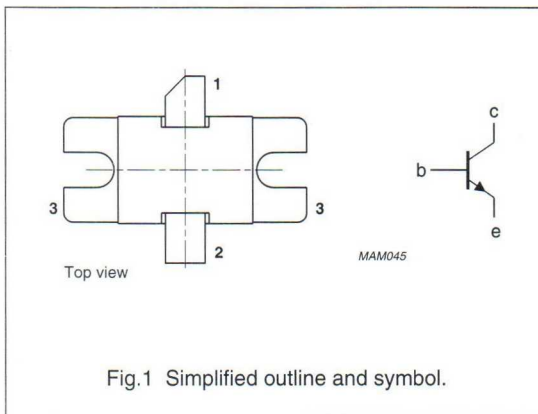


Fig.1 Simplified outline and symbol.

QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common base class C broadband amplifier.

MODE OF OPERATION	f (GHz)	V_{CC} (V)	P_L (W)	G_{po} (dB)	η_C (%)	Z/Z_L (Ω)
Class C $t_p = 10\text{ }\mu\text{s}$; $\delta = 10\%$	0.960 to 1.215	50	>325	>7	>40	see Figs 7 and 8

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

NPN microwave power transistor

MX0912B351Y


LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V _{CBO}	collector-base voltage	open emitter	–	65	V
V _{CES}	collector-emitter voltage	R _{BE} = 0 Ω	–	60	V
V _{CEO}	collector-emitter voltage	open base	–	20	V
V _{EBO}	emitter-base voltage	open collector	–	3	V
I _C	collector current	t _p ≤ 10 μs; δ ≤ 10%	–	21	A
P _{tot}	total power dissipation (peak power)	T _{mb} = 75 °C; t _p ≤ 10 μs; δ ≤ 10%	–	960	W
T _{stg}	storage temperature		–65	+200	°C
T _j	operating junction temperature		–	200	°C
T _{sld}	soldering temperature	t ≤ 10 s; note 1	–	235	°C

Note

- 1. Up to 0.2 mm from ceramic.

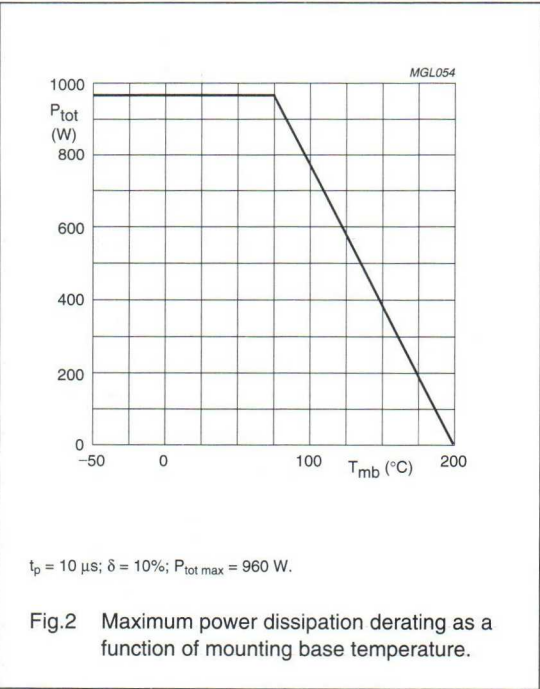

NPN microwave power transistor

MX0912B351Y

THERMAL CHARACTERISTICS $T_j = 125\text{ }^{\circ}\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	CW	1.7	K/W
$R_{th\ mb-h}$	thermal resistance from mounting base to heatsink	CW; note 1	0.2	K/W
$Z_{th\ j-h}$	thermal impedance from junction to heatsink	$t_p = 10\text{ }\mu\text{s}$; $\delta = 10\%$ notes 1 and 2	0.13	K/W

Notes

- See "Mounting recommendations in the General part of handbook SC15".
- Equivalent thermal impedance under nominal pulse microwave operating conditions.

CHARACTERISTICS $T_{mb} = 25\text{ }^{\circ}\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 65\text{ V}$; $I_E = 0$	140	mA
		$V_{CB} = 50\text{ V}$; $I_E = 0$	14	mA
I_{CES}	collector cut-off current	$V_{CE} = 60\text{ V}$; $R_{BE} = 0\text{ }\Omega$	140	mA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\text{ V}$; $I_C = 0$	1.4	mA

APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ measured in the test circuit as shown in Fig.6 and working in class C broadband in pulse mode; note 1.


MODE OF OPERATION	f (GHz)	V_{CC} (V) ⁽²⁾	P_L (W)	G_{po} (dB)	η_c (%)	Z_i/Z_L (Ω)
Class C; $t_p = 10\text{ }\mu\text{s}$; $\delta = 10\%$	0.960 to 1.215	50	>325 typ. 375	>7 typ. 7.6	>40 typ. 47	see Figs 7 and 8
$t_p = 300\text{ }\mu\text{s}$; $\delta = 10\%$; see Fig.5	1.03 to 1.09	50	typ. 350	typ. 8	typ. 48	

Notes

- Operating conditions and performance for other pulse formats can be made available on request.
- V_{CC} during pulse.

NPN microwave power transistor

MX0912B351Y

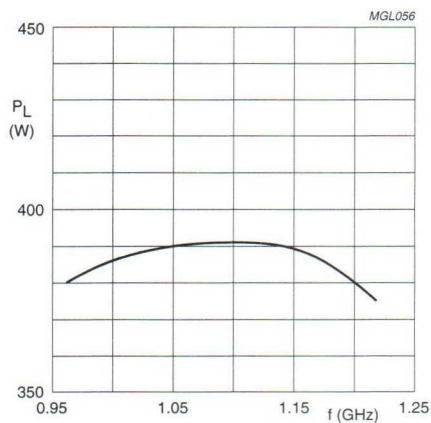

$V_{CC} = 50$ V; $t_p = 10$ μ s; $\delta = 10\%$.

Fig.3 Load power as a function of frequency.
(In broadband test circuit as shown in Fig.6)

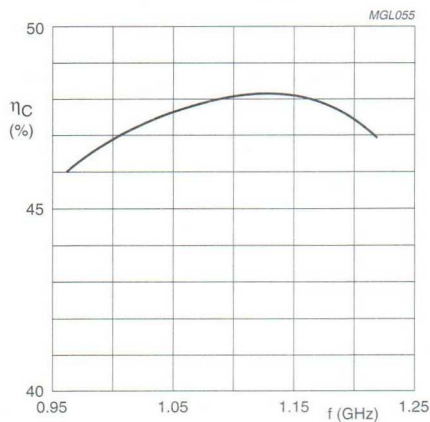


Fig.4 Collector efficiency as a function of frequency.
(In broadband test circuit as shown in Fig.6)

NPN microwave power transistor

MX0912B351Y

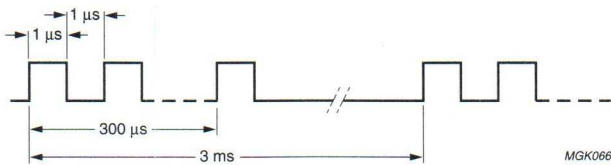


Fig.5 Pulse definition.

List of components

COMPONENT	DESCRIPTION	VALUE	DIMENSIONS	CATALOGUE NO.
L1	0.65 mm diameter copper wire	—	total length = 12 mm; height of loop = 9 mm	—
L2	4 turns 0.65 mm diameter copper wire	—	int. diameter. 3 mm; L = 5 mm	—
C1	DC block	100 pF		ATC, ref. 100A101KP50X
C2	tantalum capacitor	10 μF; 50 V		
C3	electrolytic capacitor	470 μF; 63 V		
C4	feedthrough bypass capacitor			Erie, ref. 1250-003
C5, C6	variable gigatrim capacitor	0.8 to 8 pF		Tekelec, ref. 729.1

MX0912B351Y





Fig.6 Broadband test circuit.


NPN microwave power transistor

MX0912B351Y

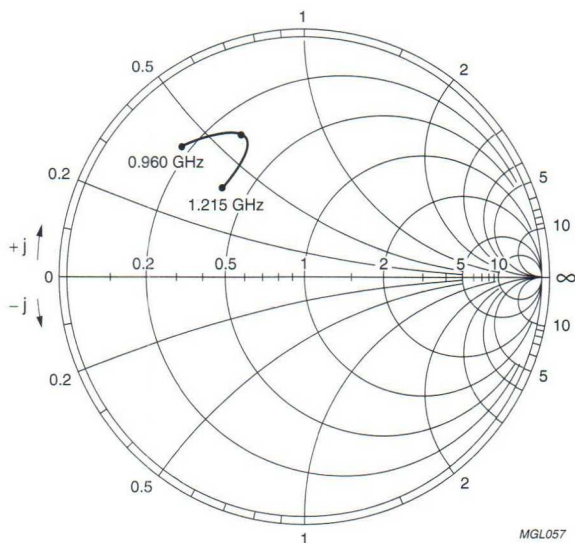

$V_{CC} = 50 \text{ V}$; $Z_0 = 5 \Omega$; $P_L = 325 \text{ W}$.

Fig.7 Input impedance as a function of frequency associated with optimum load impedance.

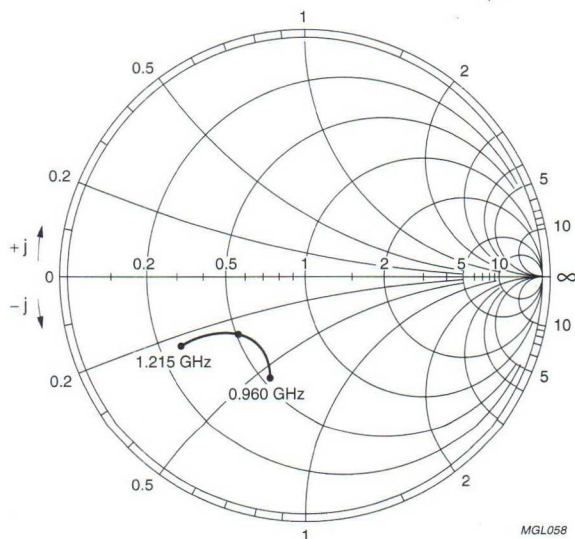

$V_{CC} = 50 \text{ V}$; $Z_0 = 5 \Omega$; $P_L = 325 \text{ W}$.

Fig.8 Optimum load impedance as a function of frequency associated with input impedance.

Microwave power transistor

MX1011B200Y

FEATURES

- Suitable for short and medium pulse applications up to 100 μ s pulse width, 10% duty factor
- Diffused emitter ballasting resistors improve ruggedness
- Interdigitated emitter-base structure provides high emitter efficiency
- Gold metallization with barrier realizes very stable characteristics and excellent lifetime
- Multicell geometry improves power sharing reduces thermal resistance
- Internal input and output prematching networks allow an easier design of circuits.

APPLICATIONS

Intended for use in common base class C broadband pulsed power amplifiers for IFF, TCAS and Mode S applications in the 1030 MHz to 1090 MHz bandwidth. Also suitable for medium pulse, heavy duty operation within the 1030 MHz to 1150 MHz bandwidth.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT439A metal ceramic flange package, with base connected to flange.

QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common base class C narrowband amplifier.

MODE OF OPERATION	CONDITIONS	f (GHz)	V _{CC} (V)	P _L (W)	G _p (dB)	η_c (%)
Class C	$t_p = 10\text{ }\mu\text{s}$; $\delta = 1\%$	1.09	50	200	≥ 7.5	≥ 45

PINNING - SOT439A

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

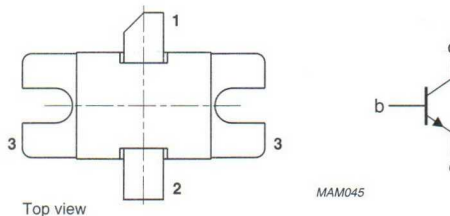


Fig.1 Simplified outline and symbol.

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

Microwave power transistor

MX1011B200Y


LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V _{CBO}	collector-base voltage	open emitter	–	65	V
V _{CES}	collector-emitter voltage	R _{BE} = 0	–	65	V
V _{CEO}	collector-emitter voltage	open base	–	15	V
V _{EBO}	emitter-base voltage	open collector	–	3	V
I _{CM}	peak collector current	t _p = 10 μs; δ = 1%	–	11.5	A
P _{tot}	total power dissipation	T _{mb} < 75 °C; t _p ≤ 10 μs; δ ≤ 1%	–	515	W
T _{stg}	storage temperature		–65	+200	°C
T _j	junction temperature		–	200	°C
T _{slid}	soldering temperature	t ≤ 10 s; note 1	–	235	°C

Note

1. Up to 0.2 mm from ceramic.

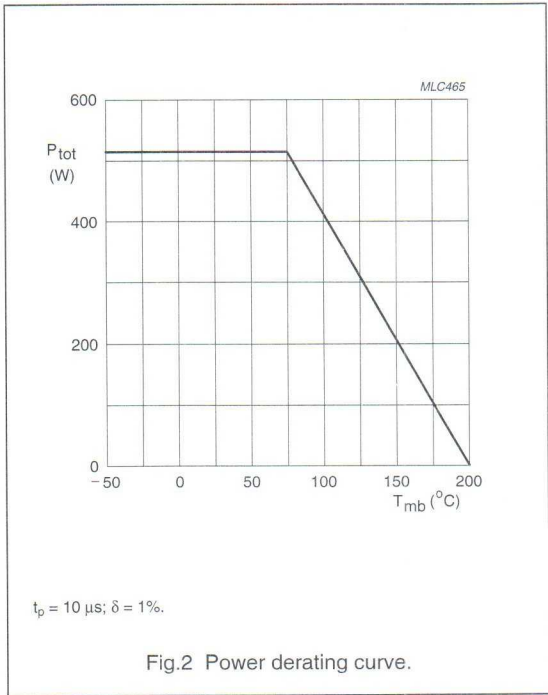

Microwave power transistor

MX1011B200Y

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	$T_j = 120\ ^\circ\text{C}$	2.5	K/W
$R_{th\ mb-h}$	thermal resistance from mounting base to heatsink	note 1	0.2	K/W
Z_{th}	thermal impedance from junction to heatsink	$t_p = 10\ \mu\text{s}$; $\delta = 1\%$; notes 1 and 2	0.16	K/W

Notes

1. See "Mounting recommendations in the General part of handbook SC15".
2. Equivalent thermal impedance under pulsed microwave operating conditions.

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
I_{CBO}	collector cut-off current	$I_E = 0$; $V_{CB} = 50\ \text{V}$	6	mA
I_{CES}	collector cut-off current	$V_{BE} = 0$; $V_{CE} = 50\ \text{V}$	6	mA
I_{EBO}	emitter cut-off current	$I_C = 0$; $V_{EB} = 1.5\ \text{V}$	1.5	mA
$V_{(BR)CBO}$	collector-base breakdown voltage	$I_C = 40\ \text{mA}$	65	V
$V_{(BR)CES}$	collector-emitter breakdown voltage	$I_C = 40\ \text{mA}$; $V_{BE} = 0$	65	V


APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ in a common-base test circuit as shown in Fig.3.

MODE OF OPERATION	CONDITIONS	f (GHz)	V_{CC} (V)	P_L (W)	G_p (dB)	η_c (%)
Class C	$t_p = 10\ \mu\text{s}$; $\delta = 1\%$	1.09	50	≥ 200 typ. 220	≥ 7.5 typ. 8.3	≥ 45 typ. 52
	$t_p = 0.5\ \mu\text{s}$; $\delta = 50\%$	1.03 to 1.09	50	typ. 220	typ. 7.5	typ. 50
	$t_p = 112\ \mu\text{s}$; $\delta = 1\%$					
	$t_p = 6.6\ \mu\text{s}$; $\delta = 51\%$	1.03 to 1.15	50	typ. 100	typ. 6	typ. 35
	$t_p = 3.3\ \mu\text{s}$; $\delta = 43\%$					
	$t_p = 32\ \mu\text{s}$; $\delta = 1\%$	1.09	50	typ. 210	typ. 7.5	typ. 47

Microwave power transistor

MX1011B200Y

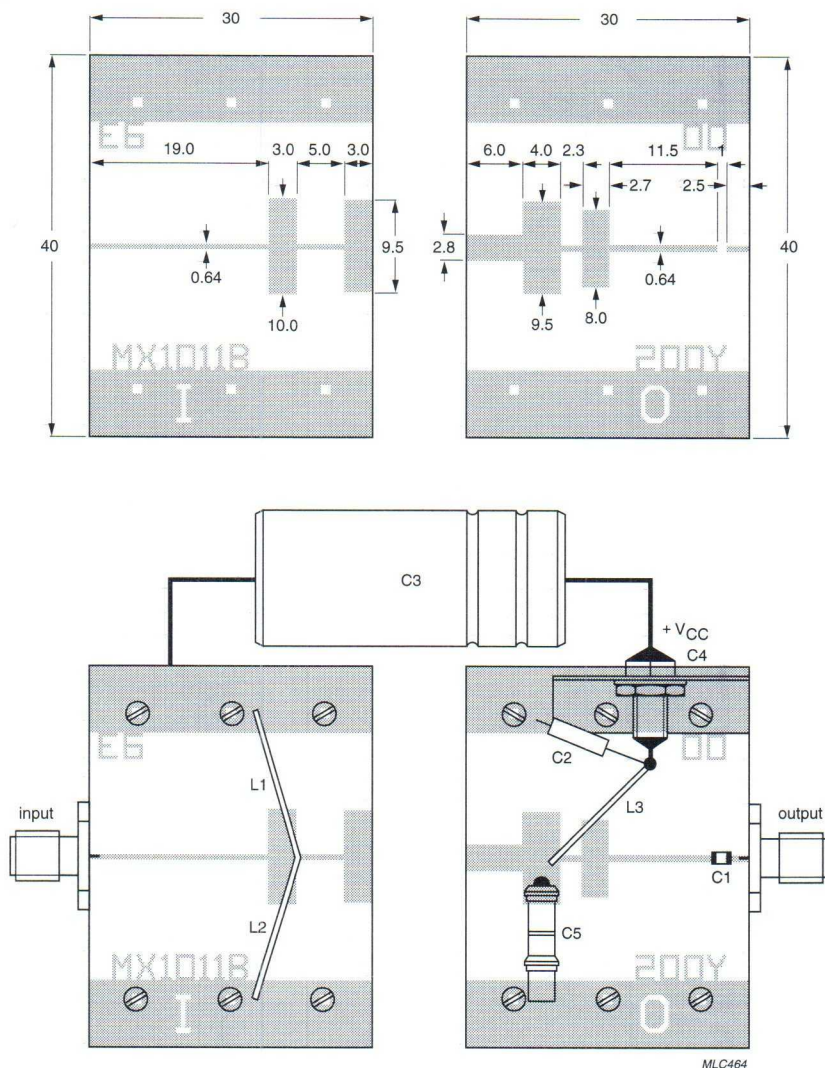

Dimensions in mm.
 Substrate: Epsilam 10.
 Thickness: 0.635 mm.
 Permittivity: $\epsilon_r = 10$.



Fig.3 Broadband test circuit.

Microwave power transistor

MX1011B200Y


List of components (see Fig.3)

COMPONENT	DESCRIPTION	VALUE	ORDERING INFORMATION
C1	capacitor	100 pF	ATC 100A101kp50x
C2	tantalum capacitor	10 μ F; 50 V	–
C3	electrolytic capacitor	63 V; 1000 μ F	–
C4	feedthrough bypass capacitor	–	Erie1250-003
C5	variable gigatrim capacitor	0.8 to 8 pF	Tekelec 729-1
L1, L2	0.65 mm copper wire; total length = 26 mm; height of loop = 10 mm	–	–
L3	0.85 mm silver wire; total length = 30 mm; height of loop = 15 mm	–	–

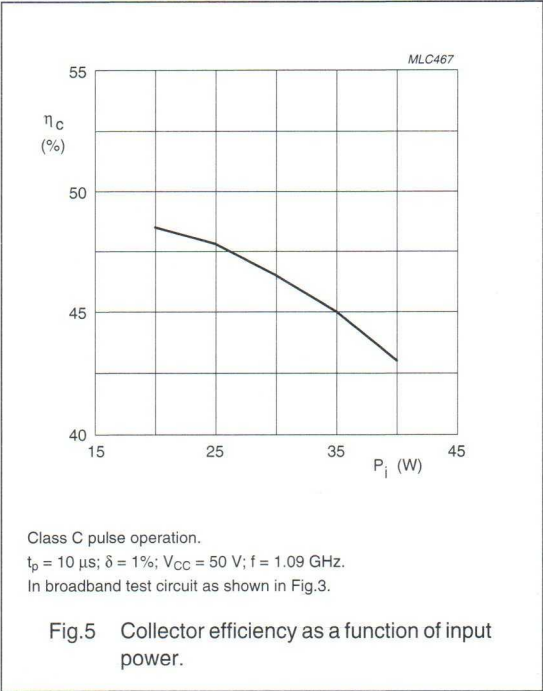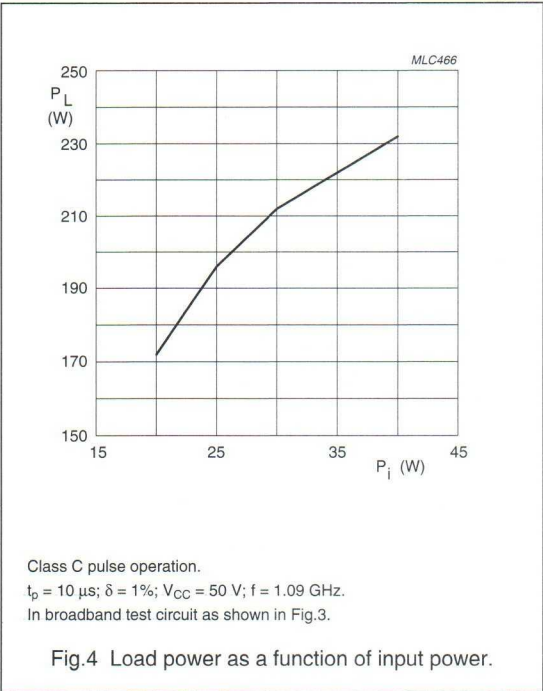


Microwave power transistor

MX1011B200Y

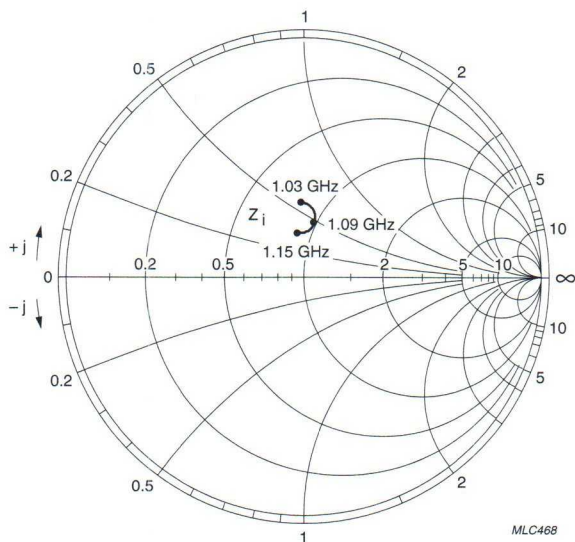

$V_{CC} = 50 \text{ V}$; $Z_0 = 10 \Omega$; $P_0 = 240 \text{ W}$.

Fig.6 Input impedance as a function of frequency.

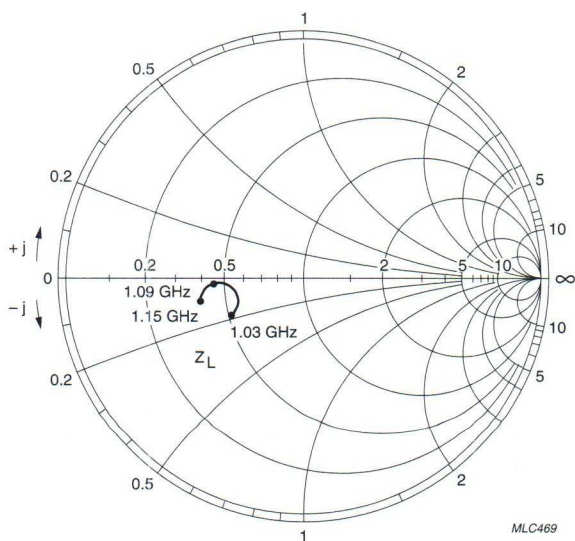

$V_{CC} = 50 \text{ V}$; $Z_0 = 50 \Omega$; $P_0 = 240 \text{ W}$.

Fig.7 Optimum load impedance as a function of frequency.

NPN microwave power transistor

MX1011B430W

FEATURES

- Suitable for short and medium pulse applications up to 500 μ s/10%
- Internal input and output prematching networks allow an easier design of circuits
- Diffused emitter ballasting resistors improve ruggedness
- Interdigitated emitter-base structure provides high emitter efficiency
- Gold metallization with barrier realizes very stable characteristics and excellent lifetime
- Multicell geometry improves power sharing and reduces thermal resistance.

APPLICATIONS

Intended for use in common base, class C, broadband, pulsed power amplifiers for TCAS applications in the 1030 to 1090 MHz band. Also suitable for medium pulse, heavy duty operation within this band.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT439A metal ceramic flange package with base connected to flange.


QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common base class C broadband amplifier.

MODE OF OPERATION	CONDITIONS	f (GHz)	V _{CC} (V)	P _L (W)	G _p (dB)	η_c (%)
Class C	$t_p = 30\text{ }\mu\text{s}$; $\delta = 1\%$	1.03	45	≥ 480	≥ 6.7	≥ 45

PINNING - SOT439A

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

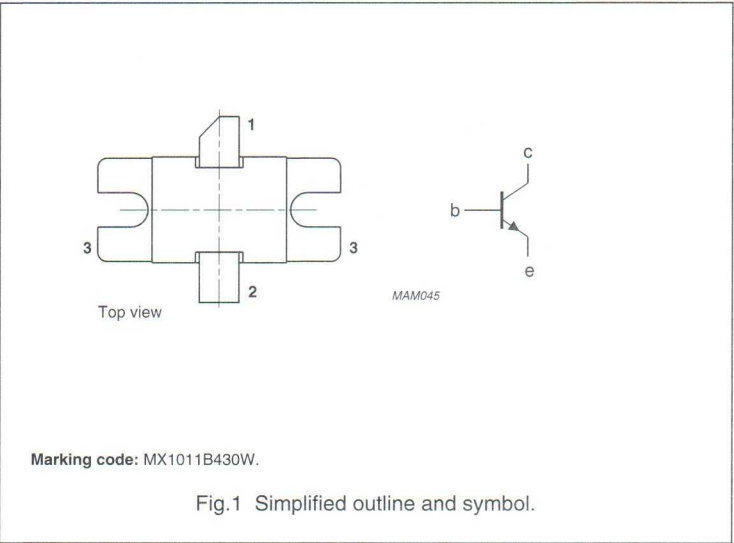

WARNING
Product and environmental safety - toxic materials
This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

MAINTENANCE TYPE - NOT RECOMMENDED FOR NEW DESIGNS; SEE INDEX SECTION OF SC15

NPN microwave power transistor

MX1011B430W


LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	–	65	V
V_{CEO}	collector-emitter voltage	open base	–	20	V
V_{CES}	collector-emitter voltage	$R_{BE} = 0\ \Omega$	–	65	V
V_{EBO}	emitter-base voltage	open collector	–	3	V
I_C	collector current	$t_p \leq 30\ \mu s; \delta \leq 1\%$	–	35	A
P_{tot}	total power dissipation	$t_p \leq 30\ \mu s; \delta \leq 1\%; T_{mb} < 75\ ^\circ C$	–	1200	W
T_{stg}	storage temperature		–65	+200	$^\circ C$
T_j	operating junction temperature		–	200	$^\circ C$
T_{sld}	soldering temperature	$t \leq 10\ s; \text{note 1}$	–	235	$^\circ C$

Note

1. Up to 0.2 mm from ceramic.

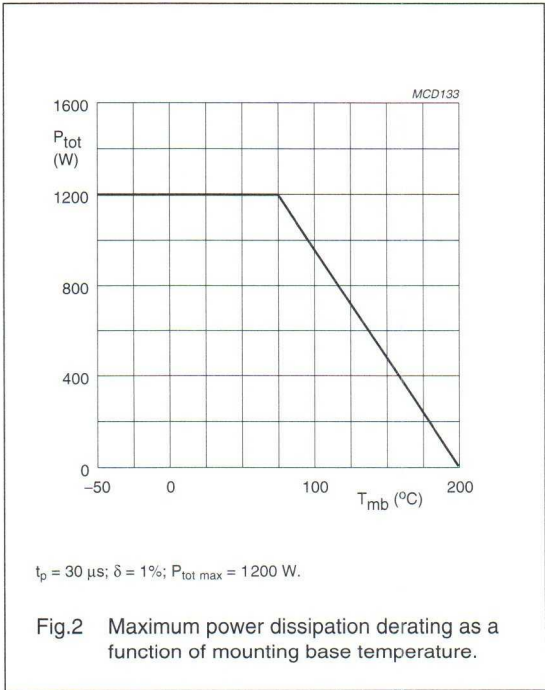

NPN microwave power transistor

MX1011B700Y

FEATURES

- Suitable for short and medium pulse applications up to 100 μ s/10%
- Internal input and output prematching networks allow an easier design of circuits
- Diffused emitter ballasting resistors improve ruggedness
- Interdigitated emitter-base structure provides high emitter efficiency
- Gold metallization with barrier realizes very good stability of the characteristics and excellent lifetime
- Multicell geometry improves power sharing and reduces thermal resistance.

APPLICATIONS

Intended for use in common base, class C, broadband, pulsed power amplifiers for IFF, TCAS and Mode S applications in the 1030 to 1090 MHz band. Also suitable for medium pulse, heavy duty operation within the 1030 to 1150 MHz band.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT439A metal ceramic flange package with base connected to flange.

QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common base class C broadband amplifier.

MODE OF OPERATION	CONDITIONS	f (GHz)	V _{CC} (V)	P _L (W)	G _P (dB)	η_c (%)
Class C	$t_p = 10\text{ }\mu\text{s}$; $\delta = 1\%$	1.09	50	650	≥ 6	≥ 48

PINNING - SOT439A

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

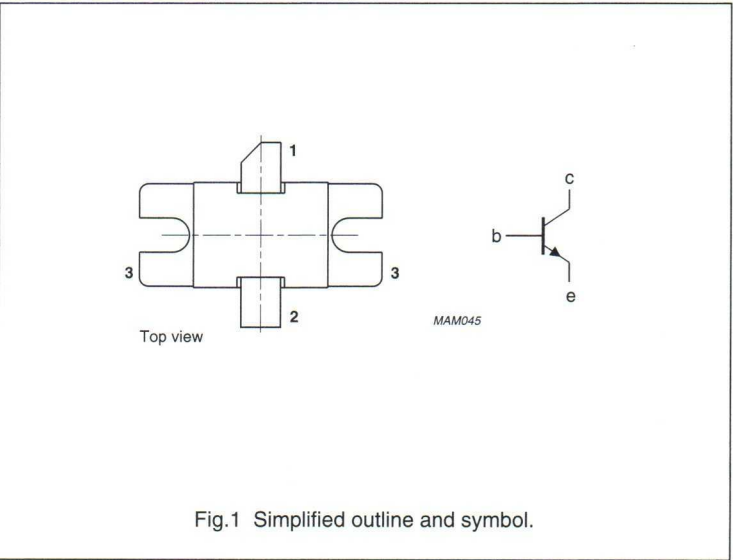


Fig.1 Simplified outline and symbol.

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

NPN microwave power transistor

MX1011B700Y


LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V _{CBO}	collector-base voltage	open emitter	–	65	V
V _{CEO}	collector-emitter voltage	open base	–	15	V
V _{CES}	collector-emitter voltage	R _{BE} = 0 Ω	–	65	V
V _{EBO}	emitter-base voltage	open collector	–	3	V
I _{CM}	peak collector current	t _p ≤ 10 μs; δ ≤ 1%	–	40	A
P _{tot}	total power dissipation	T _{mb} < 75 °C; t _p ≤ 10 μs; δ ≤ 1%	–	1365	W
T _{stg}	storage temperature		–65	+200	°C
T _j	junction temperature		–	200	°C
T _{sld}	soldering temperature	t ≤ 10 s; note 1	–	235	°C

Note

1. Up to 0.2 mm from ceramic.

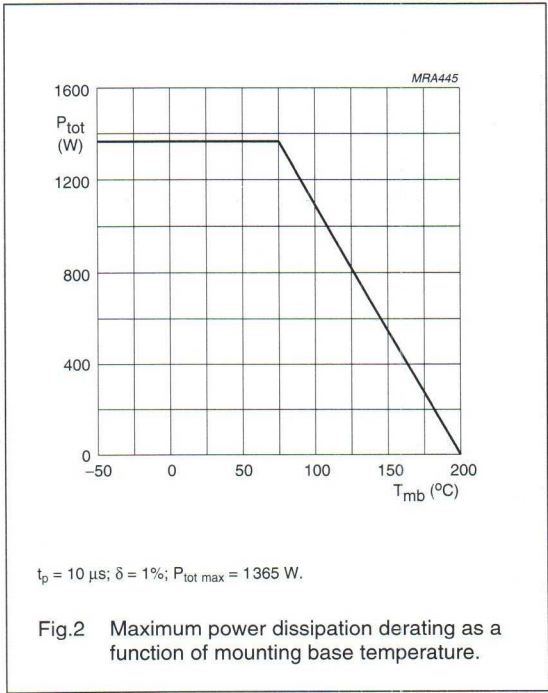

NPN microwave power transistor

MX1011B700Y

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	$T_j = 120\ ^\circ\text{C}$	1.12	K/W
$R_{th\ mb-h}$	thermal resistance from mounting base to heatsink	note 1	0.2	K/W
$Z_{th\ j-h}$	thermal impedance from junction to heatsink	$t_p = 10\ \mu\text{s}$; $\delta = 1\%$; notes 1 and 2	0.06	K/W

Notes

1. See "Mounting recommendations in the General part of handbook SC15".
2. Equivalent thermal impedance under nominal pulse microwave operating conditions.

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 50\ \text{V}$; $I_E = 0$	20	mA
I_{CES}	collector cut-off current	$V_{CE} = 50\ \text{V}$; $V_{BE} = 0$	20	mA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\ \text{V}$; $I_C = 0$	5	mA
$V_{(BR)CBO}$	collector-base breakdown voltage	$I_C = 140\ \text{mA}$; $V_{BE} = 0$	65	V
$V_{(BR)CES}$	collector-emitter breakdown voltage	$I_C = 140\ \text{mA}$; $V_{BE} = 0$	65	V



APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ in a broadband test circuit as shown in Fig.3.

MODE OF OPERATION	CONDITIONS	f (GHz)	V_{CC} (V)	P_L (W)	G_p (dB)	η_c (%)
Class C	$t_p = 10\ \mu\text{s}$; $\delta = 1\%$	1.09	50	650; typ. 740	≥ 6.0 ; typ. 7	≥ 48 ; typ. 55
	$t_p = 0.5\ \mu\text{s}$; $\delta = 50\%$; $t_p = 112\ \mu\text{s}$; $\delta = 1\%$	1.03 to 1.09	50	typ. 650	typ. 6.4	typ. 45
	$t_p = 6.6\ \mu\text{s}$; $\delta = 51\%$; $t_p = 3.3\ \text{ms}$; $\delta = 43\%$	1.03 to 1.15	50	typ. 300	typ. 7	typ. 45
	$t_p = 32\ \mu\text{s}$; $\delta = 1\%$	1.09	50	typ. 700	typ. 6.7	typ. 55

NPN microwave power transistor

MX1011B700Y

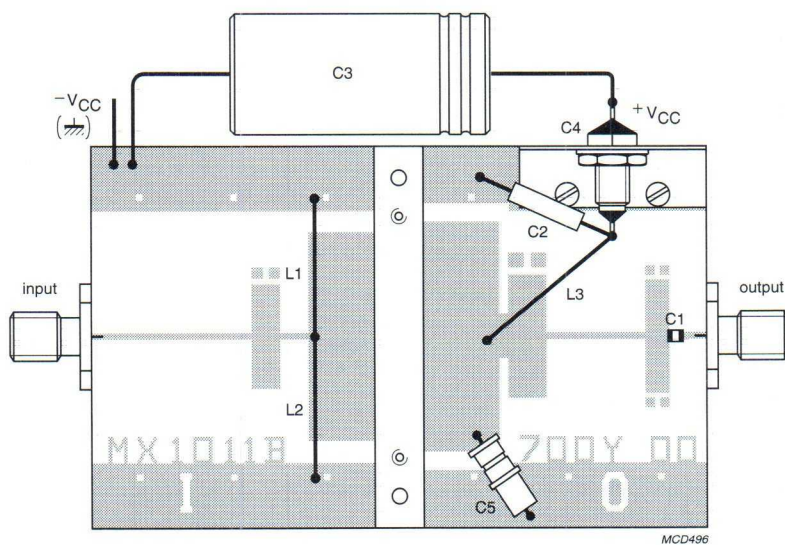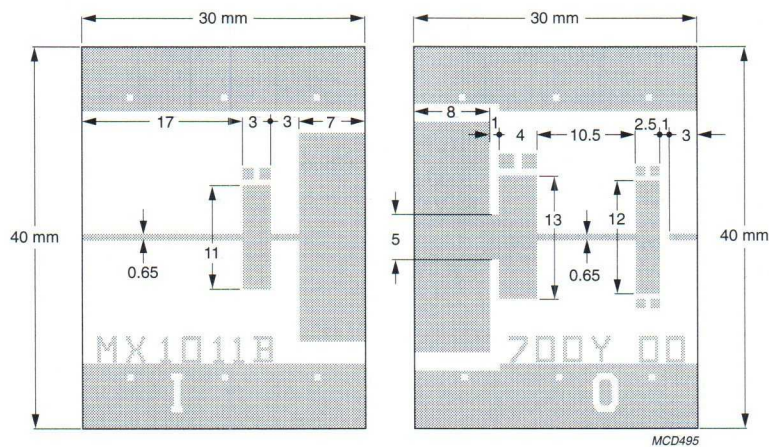

Substrate: Epsilam 10.
 Thickness: 0.635 mm.
 Permittivity: $\epsilon_r = 10$.


Fig.3 Broadband test circuit.

NPN microwave power transistor

MX1011B700Y


List of components (see Fig.3)

COMPONENT	DESCRIPTION	VALUE	DIMENSIONS	CATALOGUE NO.
L1, L2	0.65 mm diameter copper wire	–	total length = 26 mm; height of loop = 10 mm	–
L3	0.85 mm diameter silver wire	–	total length = 30 mm; height of loop = 15 mm	–
C1	capacitor	100 pF	–	ATC, ref.100A101KP50X
C2	tantalum capacitor	10 μ F; 50 V	–	–
C3	electrolytic capacitor	1000 μ F; 63 V	–	–
C4	feedthrough bypass capacitor	–	–	Erie, ref.1250-003
C5	variable gigatrim capacitor	0.8 – 8 pF	–	Tekelec, ref.729.1

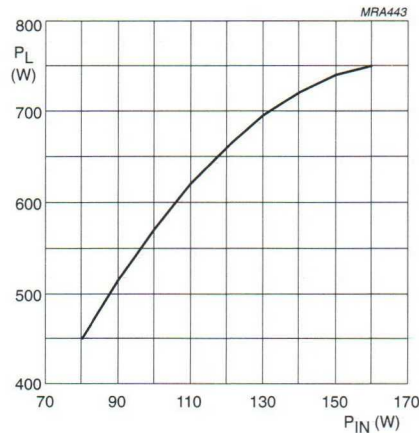

Class C pulse operation; $t_p = 10 \mu s$; $\delta = 1\%$; $V_{CC} = 50 V$;
 $f = 1.09 GHz$; (In broadband test circuit as shown in Fig.3).

Fig.4 Load power as a function of input power.

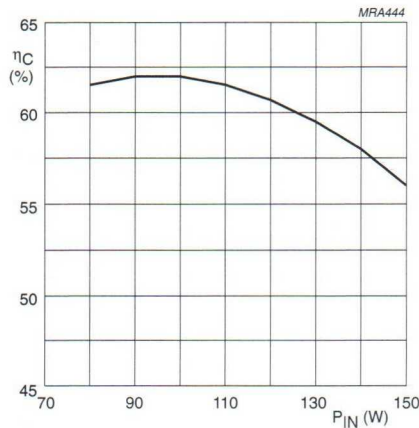


Class C pulse operation; $t_p = 10 \mu s$; $\delta = 1\%$; $V_{CC} = 50 V$;
 $f = 1.09 GHz$; (In broadband test circuit as shown in Fig.3).

Fig.5 Collector efficiency as a function of input power.


NPN microwave power transistor

MX1011B700Y

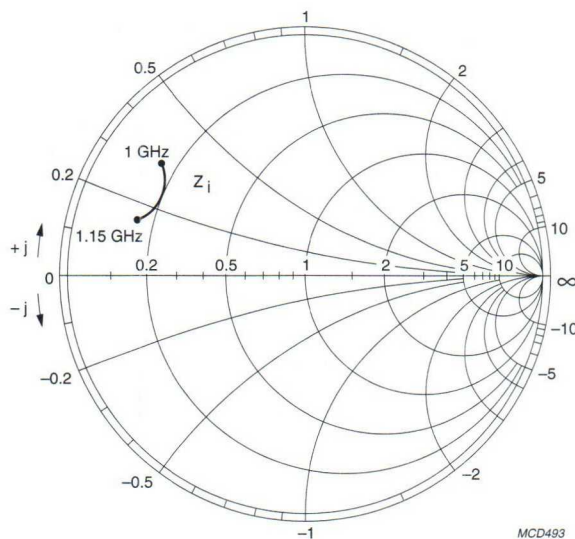

$V_{CC} = 50 \text{ V}$; $Z_0 = 10 \Omega$; $P_o = 740 \text{ W}$.

Fig.6 Input impedance as a function of frequency, associated with optimum load impedance.

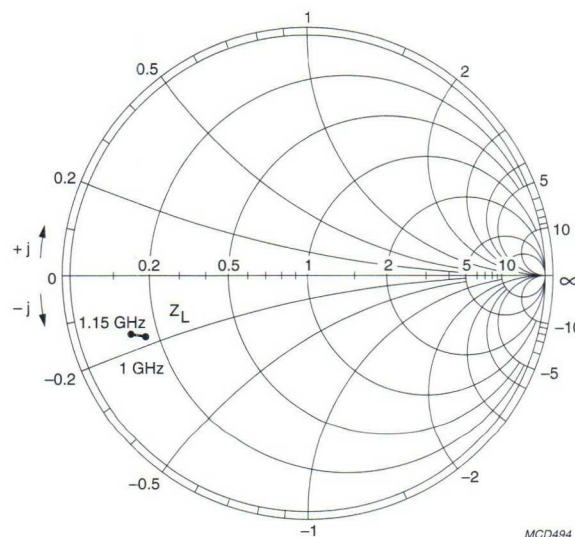

$V_{CC} = 50 \text{ V}$; $Z_0 = 10 \Omega$; $P_o = 740 \text{ W}$.

Fig.7 Optimum load impedance as a function of frequency; associated with input impedance.

NPN microwave power transistor

MZ0912B50Y

FEATURES

- Interdigitated structure provides high emitter efficiency
- Diffused emitter ballasting resistors providing excellent current sharing and withstanding a high VSWR
- Gold metallization realizes very stable characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance
- Input and output matching cell allows an easier design of circuits.

APPLICATIONS

Common base, class C, broadband, pulse power amplifier from 960 to 1215 MHz for TACAN application.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT443A metal ceramic flange package with base connected to flange. It is mounted in common base configuration, and specified in class C.

QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common base class C broadband amplifier.

MODE OF OPERATION	f (GHz)	V _{CC} (V)	P _L (W)	G _p (dB)	η_c (%)	Z _i /Z _L (Ω)
Class C; $t_p = 10\text{ }\mu\text{s}$; $\delta = 1\%$	0.960 to 1.215	50	>50	>7	>42	see Figs 6 and 7

PINNING - SOT443A

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

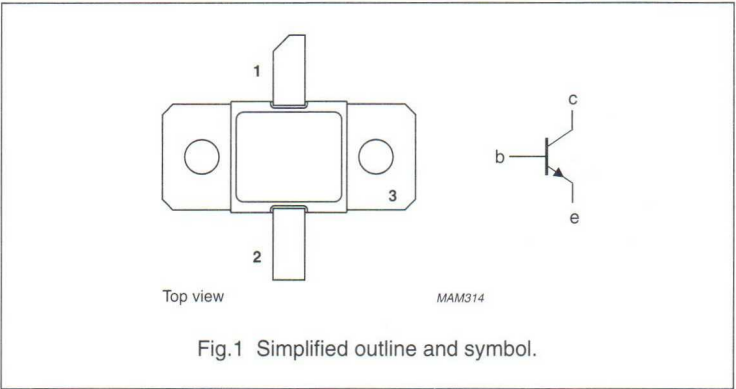


Fig.1 Simplified outline and symbol.

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

NPN microwave power transistor

MZ0912B50Y


LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	–	65	V
V_{CEO}	collector-emitter voltage	open base	–	20	V
V_{CES}	collector-emitter voltage	$R_{BE} = 0\ \Omega$	–	60	V
V_{EBO}	emitter-base voltage	open collector	–	3	V
I_C	collector current (DC)	$t_p \leq 10\ \mu s; \delta \leq 10\%$	–	3	A
P_{tot}	total power dissipation (peak power)	$T_{mb} = 75\ ^\circ C; t_p \leq 10\ \mu s; \delta \leq 10\%$	–	150	W
T_{stg}	storage temperature		–65	+200	$^\circ C$
T_j	operating junction temperature		–	200	$^\circ C$
T_{sld}	soldering temperature	$t \leq 10\ s; \text{note 1}$	–	235	$^\circ C$

Note

1. Up to 0.2 mm from ceramic.

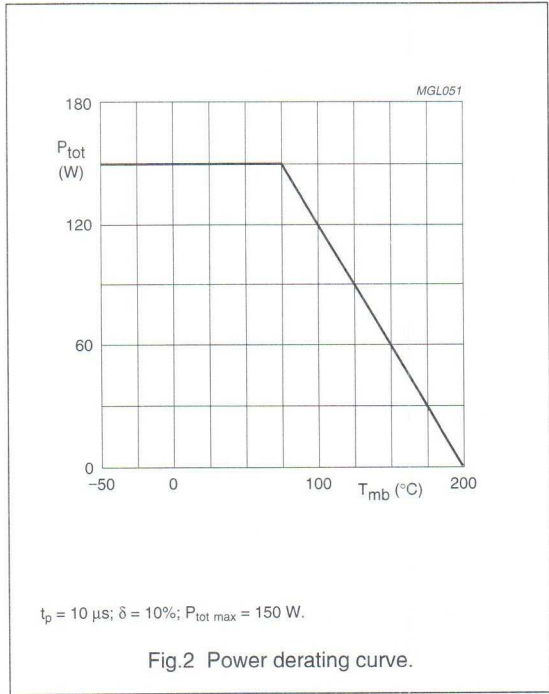

NPN microwave power transistor

MZ0912B50Y

THERMAL CHARACTERISTICS $T_j = 125\text{ }^{\circ}\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	CW	4.9	K/W
$R_{th\ mb-h}$	thermal resistance from mounting base to heatsink	CW; note 1	0.2	K/W
$Z_{th\ j-h}$	thermal impedance from junction to heatsink	notes 1 and 2	0.85	K/W

Notes

1. See "Mounting recommendations in the General part of handbook SC15".
2. Equivalent thermal impedance under nominal pulse microwave operating conditions; $t_p = 10\text{ }\mu\text{s}$; $\delta = 10\%$.

CHARACTERISTICS $T_{mb} = 25\text{ }^{\circ}\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 65\text{ V}$; $I_E = 0$	20	mA
		$V_{CB} = 50\text{ V}$; $I_E = 0$	2	mA
I_{CES}	collector cut-off current	$V_{CE} = 60\text{ V}$; $R_{BE} = 0\text{ }\Omega$	20	mA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\text{ V}$; $I_C = 0$	200	μA

APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ measured in the test jig as shown in Fig.3 and working in class C broadband mode in pulse; note 1.

MODE OF OPERATION	f (GHz)	V_{CC} (V) ⁽²⁾	P_L (W)	G_p (dB)	η_c (%)	Z_i/Z_L (Ω)
Class C; $t_p = 10\text{ }\mu\text{s}$; $\delta = 10\%$	0.960 to 1.215	50	>50 typ. 60	>7 typ. 8	>42 typ. 44	see Figs 6 and 7

Notes



1. Operating conditions and performance for other pulse formats can be made available on request.
2. V_{CC} during pulse.

List of components (see Fig.3).

COMPONENT	DESCRIPTION	VALUE	DIMENSIONS	CATALOGUE NO.
L1, L2	0.65 mm diameter copper wire	—	total length = 12 mm; height of loop = 9 mm	—
L3	4 turns 0.65 mm diameter copper wire;	—	int. dia. 3 mm; $l = 5\text{ mm}$	—
C1	capacitor	100 pF	—	ATC, ref. 100A101KP50X
C2	tantalum capacitor	10 μF ; 50 V	—	—
C3	electrolytic capacitor	470 μF ; 63 V	—	—
C4	feedthrough bypass capacitor	—	—	Erie, ref. 1250-003
C5, C6	variable gigatrim capacitor	0.6 to 4.5 pF	—	Tekelec, ref. 727.1

NPN microwave power transistor

MZ0912B50Y

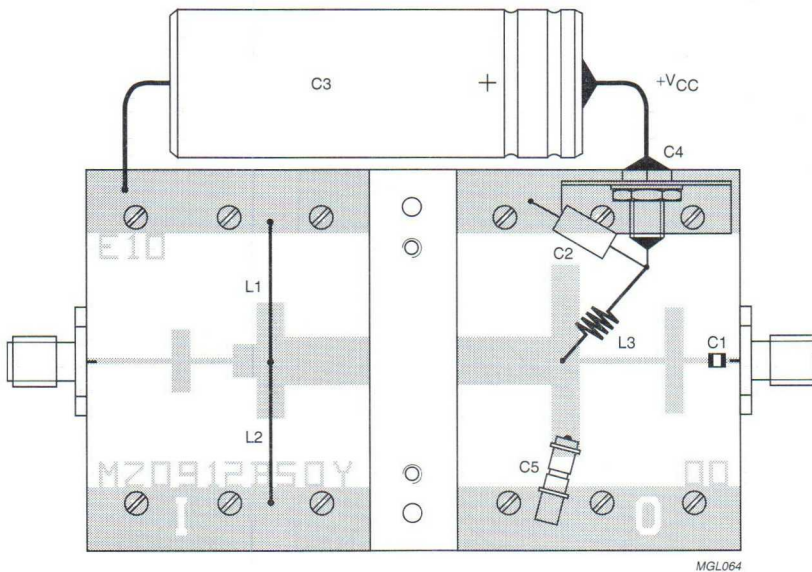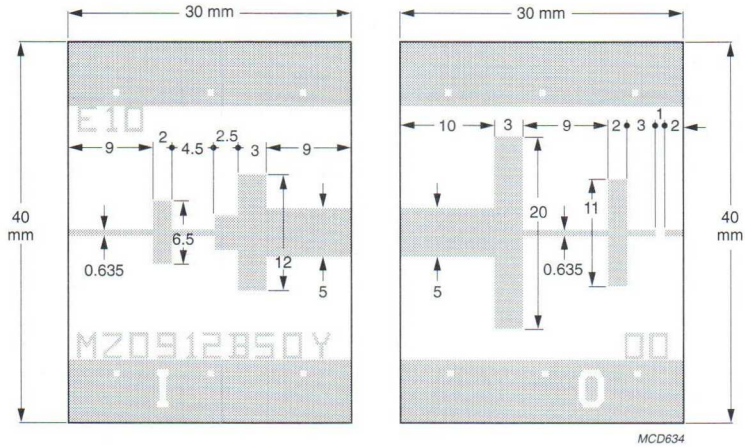


Substrate: Epsilam 10.
Thickness: 0.635 mm.
Permittivity: $\epsilon_r = 10$.

Fig.3 Broadband test circuit.

NPN microwave power transistor

MZ0912B50Y

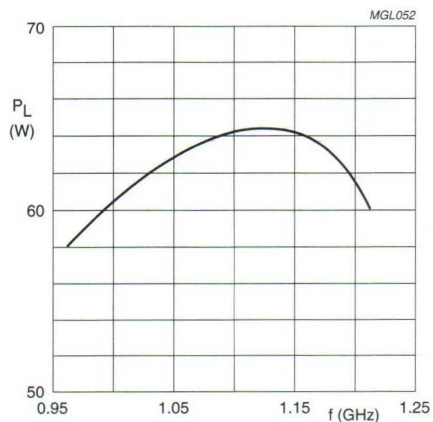

$V_{CC} = 50$ V; $t_p = 10$ μ s; $\delta = 10\%$.

Fig.4 Load power as a function of frequency; (In broadband test circuit as shown in Fig.3).


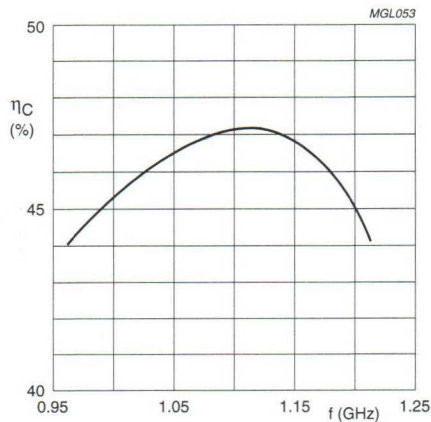


Fig.5 Collector efficiency as a function of frequency; (In broadband test circuit as shown in Fig.3).

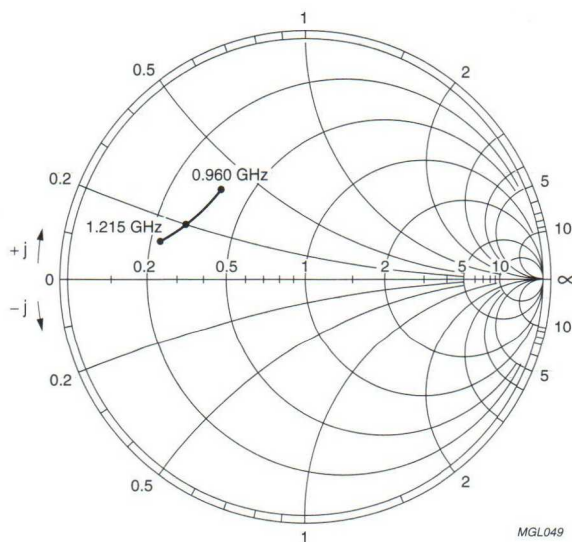


$V_{CC} = 50$ V; $Z_0 = 10$ Ω ; $P_L = 50$ W.

Fig.6 Optimum load impedance as a function of frequency, associated with input impedance.

NPN microwave power transistor

MZ0912B50Y

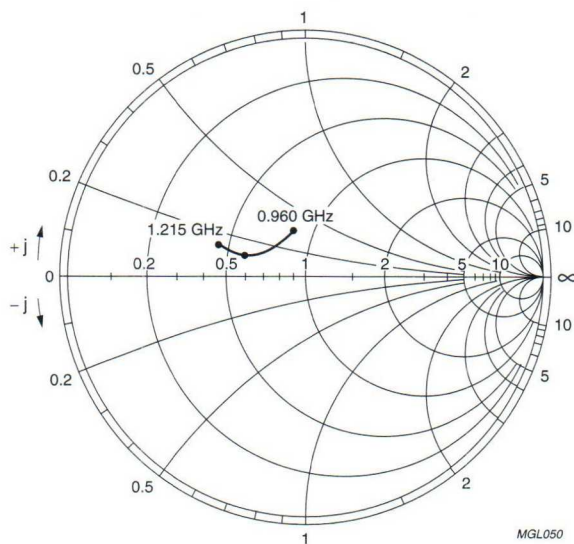

$V_{CC} = 50 \text{ V}$; $Z_0 = 10 \Omega$; $P_L = 50 \text{ W}$.

Fig.7 Input impedance as a function of frequency, associated with optimum load impedance.

Microwave power transistor

PLB16004U

FEATURES

- Diffused emitter ballasting resistors improve excellent current sharing and withstanding a high VSWR
- Interdigitated common-base structure provides high emitter efficiency
- Gold metallization with barrier realizes very stable characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance
- Internal input and output prematching networks allow an easier design of circuits.

APPLICATIONS

Intended for use in common-base class C power amplifiers at 1.6 GHz.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT437A glued cap metal ceramic flange package, with base connected to flange.


QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common base class C narrowband amplifier.

MODE OF OPERATION	f (GHz)	V _{CC} (V)	P _L (W)	G _p (dB)	η _c (%)	Z _i ; Z _L (Ω)
Class C (CW)	1.6	28	>4.5	>8.5	>40	see Figs 5 and 6

PINNING - SOT437A

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

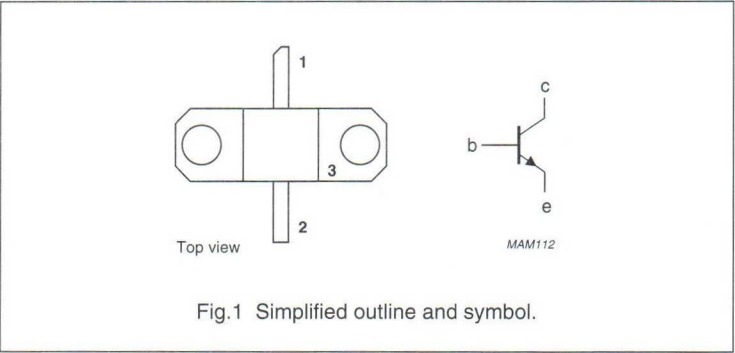

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

Microwave power transistor

PLB16004U


LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	–	40	V
V_{CES}	collector-emitter voltage	$R_{BE} = 0$	–	40	V
V_{CEO}	collector-emitter voltage	open base	–	15	V
V_{EBO}	emitter-base voltage	open collector	–	3	V
I_C	DC collector current		–	0.5	A
P_{tot}	total power dissipation	$T_{mb} = 75\text{ °C}$	–	9	W
T_{stg}	storage temperature		–65	+150	°C
T_j	junction temperature		–	200	°C
T_{sld}	soldering temperature	$t \leq 10\text{ s}$; note 1	–	235	°C

Note

1. Up to 0.3 mm from ceramic.

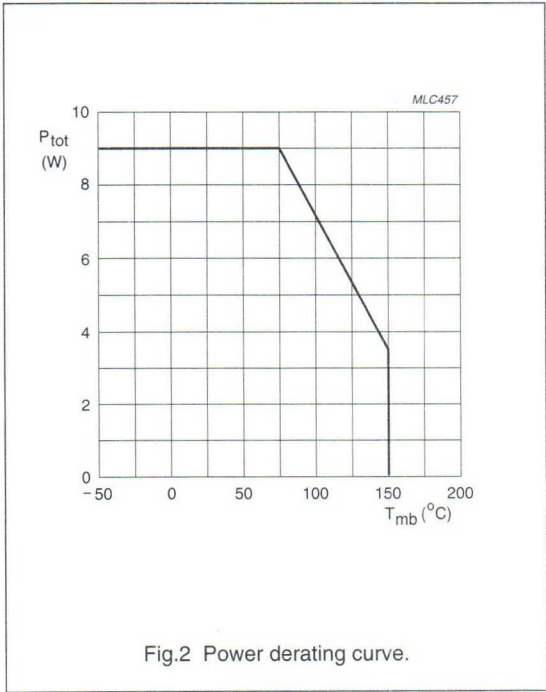

Microwave power transistor

PLB16004U

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	$T_j = 100\ ^\circ\text{C}$	11	K/W
$R_{th\ mb-h}$	thermal resistance from mounting base to heatsink	note 1	0.3	K/W

Note

- See "Mounting recommendations in the General part of handbook SC15".

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
I_{CES}	collector cut-off current	$R_{BE} = 0; V_{CE} = 30\ \text{V}$	—	200	μA
$V_{(BR)CBO}$	collector-base breakdown voltage	$I_C = 1\ \text{mA}; I_E = 0$	40	—	V
$V_{(BR)CES}$	collector-emitter breakdown voltage	$I_C = 1\ \text{mA}; I_E = 0$	40	—	V
$V_{(BR)EBO}$	emitter-base breakdown voltage	$I_C = 1\ \text{mA}; I_E = 0$	3	—	V
h_{FE}	DC current gain	$I_C = 300\ \text{mA}; V_{CE} = 5\ \text{V}$	15	100	


APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ in a common-base test circuit as shown in Fig.3.

MODE OF OPERATION	f (GHz)	V_{CC} (V)	P_L (W)	G_p (dB)	η_c (%)	$Z_i; Z_L$ (Ω)
Class C (CW)	1.6	28	typ. 5	typ. 10	typ. 50	see Figs 5 and 6


Microwave power transistor

PLB16004U

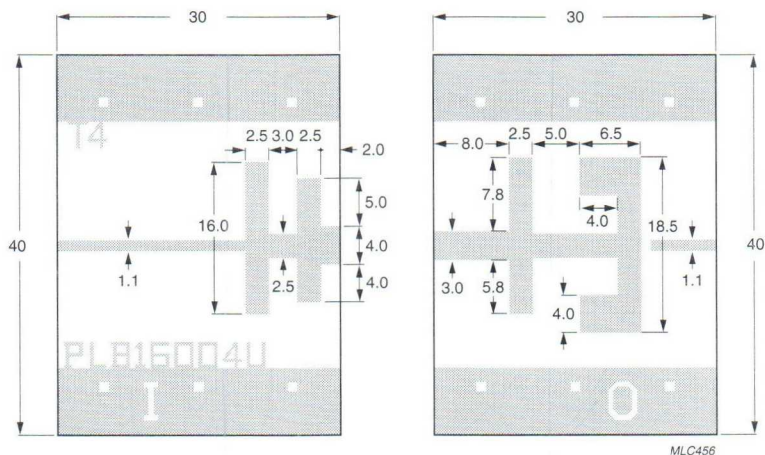

Dimensions in mm.
 Substrate: Teflon fibre glass.
 Thickness: 0.4 mm.
 Permittivity: $\epsilon_r = 2.55$.

Fig.3 Narrowband test circuit.

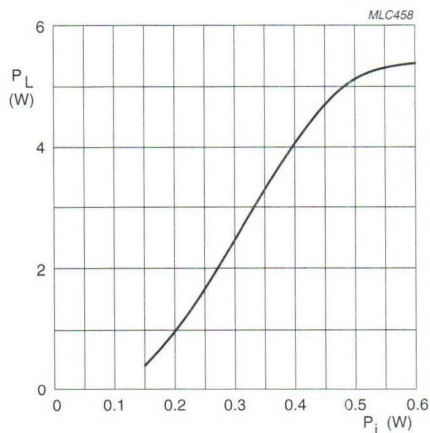


$V_{CC} = 28 \text{ V}$; $f = 1.6 \text{ GHz}$.

Fig.4 Load power as a function of input power.


Microwave power transistor

PLB16004U

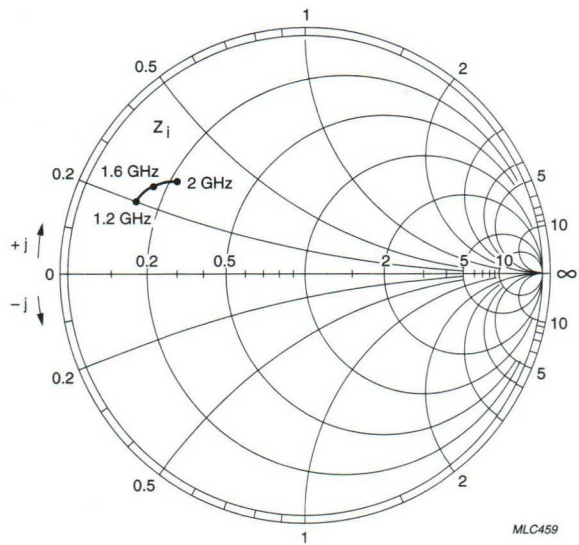

$V_{CC} = 28 \text{ V}; Z_o = 50 \Omega.$

Fig.5 Input impedance as a function of frequency; typical values.

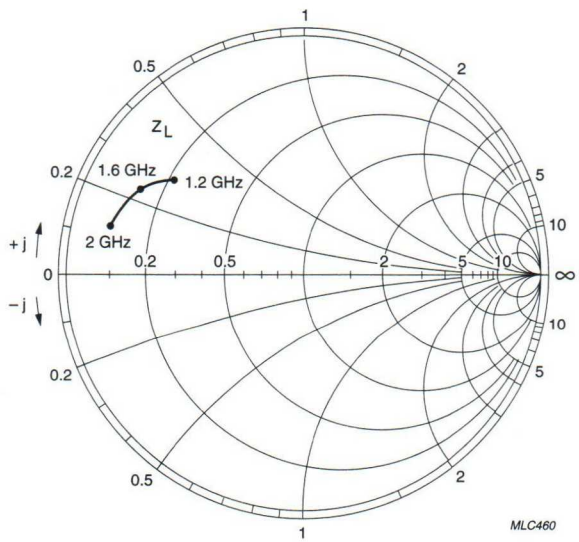

$V_{CC} = 28 \text{ V}; Z_o = 50 \Omega.$

Fig.6 Optimum load impedance as a function of frequency; typical values.

NPN microwave power transistor

PLB16012U

FEATURES

- Input matching cell allows an easier design of circuits
- Diffused emitter ballasting resistors providing excellent current sharing and withstanding a high VSWR
- Interdigitated structure provides high emitter efficiency
- Gold metallization realizes very stable characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance.

APPLICATIONS

Common base, class C, power amplifiers at 1.6 GHz. Also suitable for operation in the 1.4 to 1.8 GHz range.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT437A glued cap metal ceramic flange package with base connected to flange.


QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common base class C narrowband amplifier.

MODE OF OPERATION	f (GHz)	V _{CC} (V)	P _L (W)	G _p (dB)	η _c (%)	Z _i ; Z _L (Ω)
Class C (CW)	1.6	28	10	>8	>45	see Figs 5 and 6

PINNING - SOT437A

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

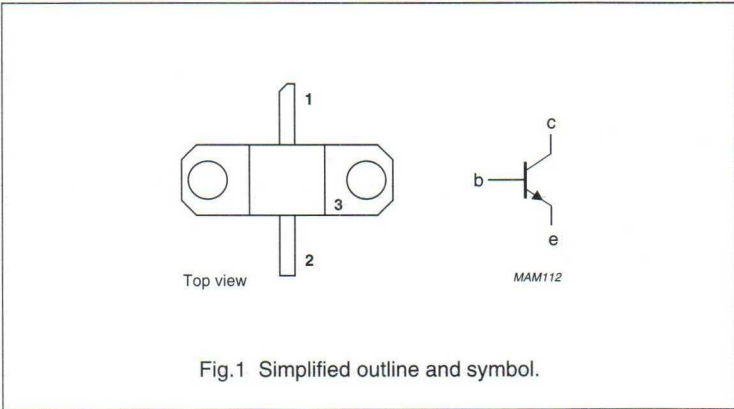

WARNING
Product and environmental safety - toxic materials
This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

NPN microwave power transistor

PLB16012U



LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	—	45	V
V_{CEO}	collector-emitter voltage	open base	—	15	V
V_{CES}	collector-emitter voltage	$R_{BE} = 0 \ \Omega$	—	40	V
V_{EBO}	emitter-base voltage	open collector	—	3	V
I_C	collector current (DC)		—	0.9	A
P_{tot}	total power dissipation	$T_{mb} = 75 \text{ }^\circ\text{C}$	—	15	W
T_{stg}	storage temperature		-65	+150	$^\circ\text{C}$
T_j	operating junction temperature		—	200	$^\circ\text{C}$
T_{sld}	soldering temperature	$t \leq 10 \text{ s}$; note 1	—	235	$^\circ\text{C}$

Note

- Up to 0.3 mm from ceramic.

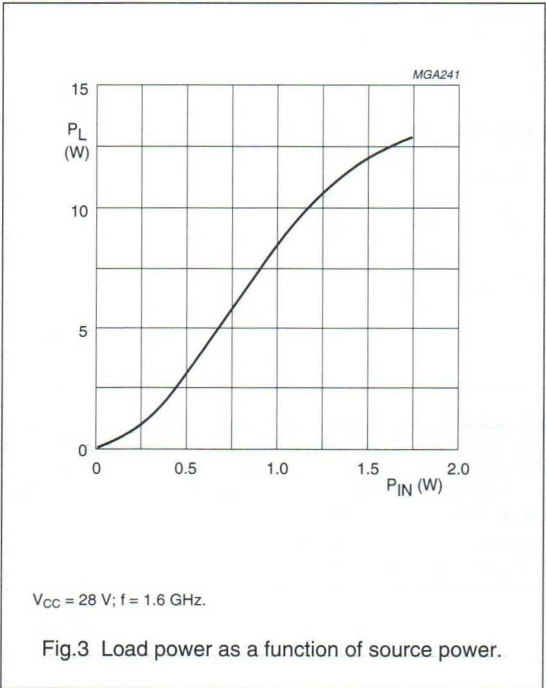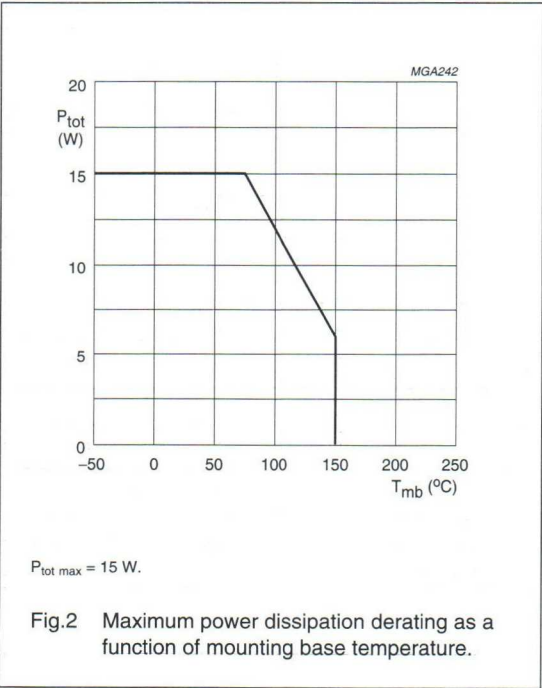

NPN microwave power transistor

PLB16012U

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	$T_j = 100\ ^\circ\text{C}$	6	K/W
$R_{th\ mb-h}$	thermal resistance from mounting base to heatsink	note 1	0.3	K/W

Note

- See "Mounting recommendations in the General part of handbook SC15".

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 28\ \text{V}; I_E = 0$	0.3	mA
		$V_{CB} = 35\ \text{V}; I_E = 0$	0.6	mA
I_{CES}	collector cut-off current	$V_{CE} = 28\ \text{V}; R_{BE} = 0\ \Omega$	0.6	mA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\ \text{V}; I_C = 0$	25	μA

APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ in a common base test circuit as shown in Fig.4 and working in CW class C mode.

MODE OF OPERATION	f (GHz)	V_{CC} (V)	P_L (W)	G_p (dB)	η_c (%)	$Z_i; Z_L$ (Ω)
Class C (CW) note 1	1.6	28	10	≥ 8 typ. 9.4	≥ 45 typ. 60	see Figs 5 and 6
Class C - 100 ms 50%	1.6	28	typ. 15	typ. 9.4	typ. 60	

Note



- May be used for narrowband or broadband amplifiers within the frequency range 1.4 to 1.8 GHz. Operation below 1.4 GHz may damage the transistor due to resonance of the internal output prematching circuit.

List of components (see Fig.4)

COMPONENT	DESCRIPTION	VALUE	DIMENSIONS	CATALOGUE NO.
L1, L2	5 turns 0.2 mm diameter copper wire		int. dia. = 2 mm	
C1	DC blocking capacitor	100 pF		
C2	feedthrough bypass capacitor			Erie, ref.1250-003
C3	trimmer capacitor	0.6 - 4.5 pF		AT-3-7-271SL
C4	electrolytic capacitor	150 μF , 45 V		

NPN microwave power transistor

PLB16012U

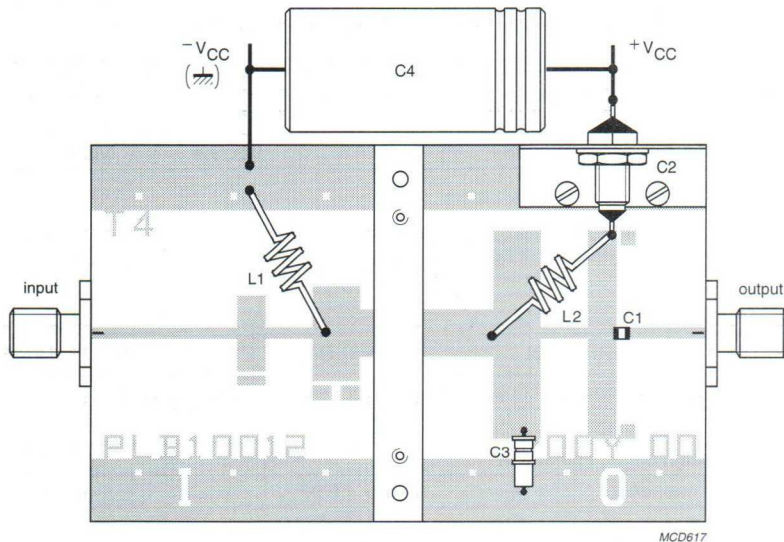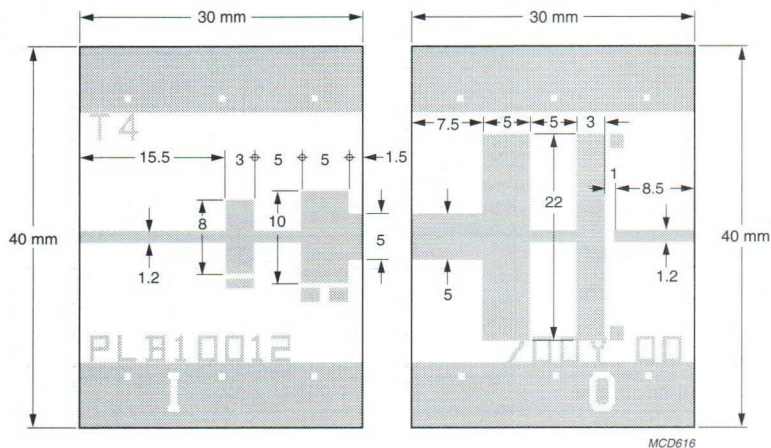


Substrate: Teflon fibre glass.
 Thickness: 0.4 mm.
 Permittivity: $\epsilon_r = 2.55$.

Fig.4 Narrowband test circuit.


NPN microwave power transistor

PLB16012U

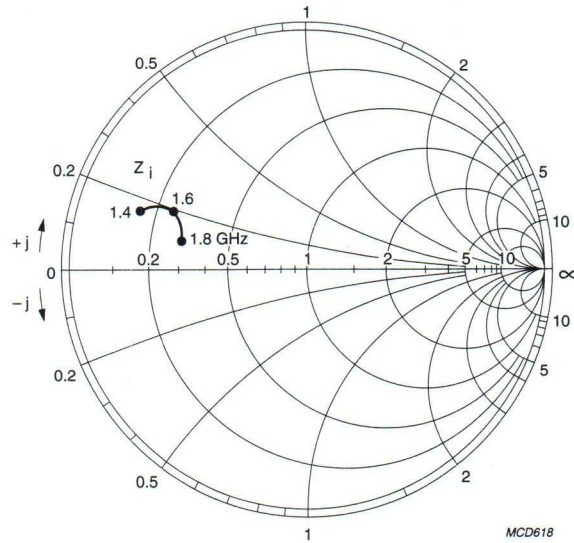

$V_{CC} = 28 \text{ V}; Z_0 = 10 \Omega.$

Fig.5 Input impedance as a function of frequency; typical values.

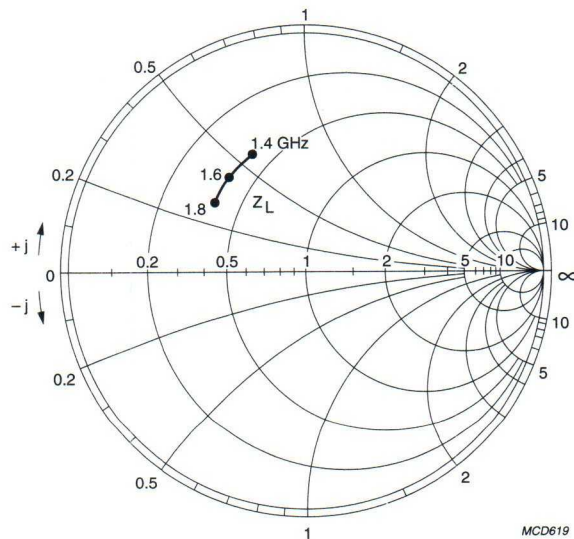

$V_{CC} = 28 \text{ V}; Z_0 = 10 \Omega.$

Fig.6 Optimum load impedance as a function of frequency; typical values.

NPN microwave power transistor

PLB16030U

FEATURES

- Input and output matching cell allows an easier design of circuits
- Diffused emitter ballasting resistors providing excellent current sharing and withstanding a high VSWR
- Interdigitated structure provides high emitter efficiency
- Gold metallization realizes very stable characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance.

APPLICATIONS

Common base class B power amplifiers at 1.6 GHz. Also suitable for operation in the frequency range 1.4 to 1.8 GHz.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT437A glued cap metal ceramic flange package with base connected to flange.

QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common base class B narrowband amplifier.

MODE OF OPERATION	f (GHz)	V _{CC} (V)	P _L (W)	G _p (dB)	η_c (%)	Z _i ; Z _L (Ω)
Class B (CW)	1.6	28	>30	>7	>45	see Figs 5 and 6

PINNING - SOT437A

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

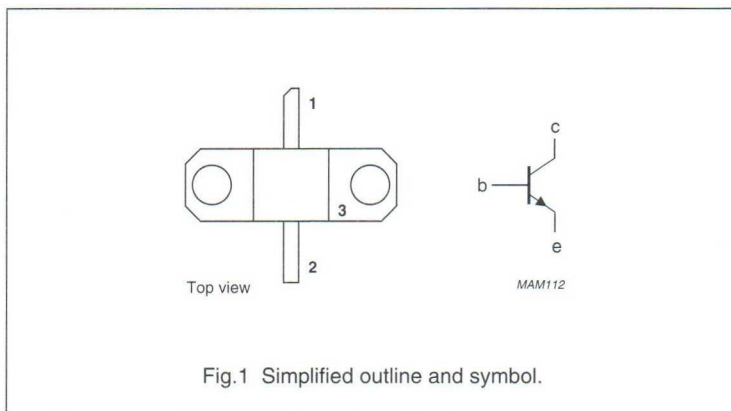


Fig.1 Simplified outline and symbol.

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

NPN microwave power transistor

PLB16030U



LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	—	45	V
V_{CEO}	collector-emitter voltage	open base	—	15	V
V_{CES}	collector-emitter voltage	$R_{BE} = 0\ \Omega$	—	40	V
V_{EBO}	emitter-base voltage	open collector	—	3	V
I_C	collector current (DC)		—	2.6	A
P_{tot}	total power dissipation	$T_{mb} = 75\ ^\circ\text{C}$	—	40	W
T_{stg}	storage temperature		-65	+150	$^\circ\text{C}$
T_j	operating junction temperature		—	200	$^\circ\text{C}$
T_{sld}	soldering temperature	$t \leq 10\text{ s}$; note 1	—	235	$^\circ\text{C}$

Note

- 1. Up to 0.3 mm from ceramic.

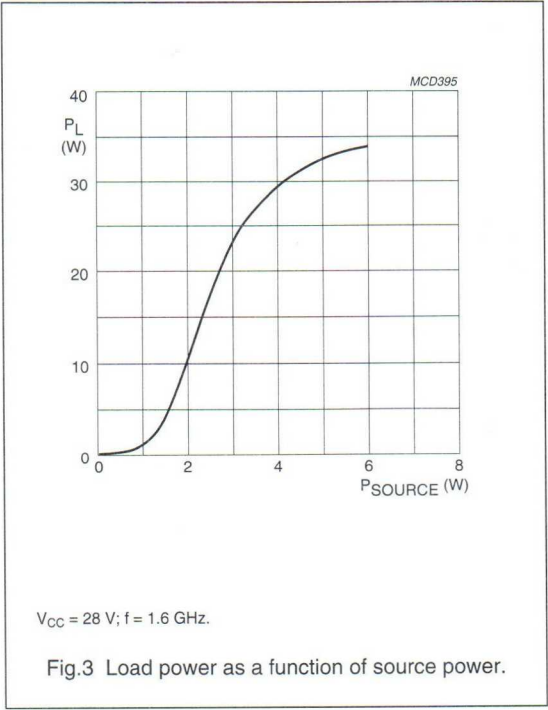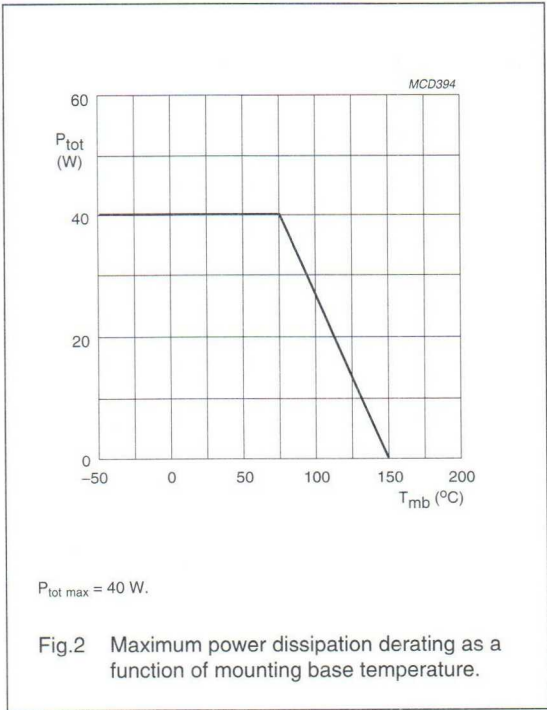

NPN microwave power transistor

PLB16030U

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	$T_j = 100\ ^\circ\text{C}$	2.4	K/W
$R_{th\ mb-h}$	thermal resistance from mounting base to heatsink	note 1	0.3	K/W

Note

1. See "Mounting recommendations in the General part of handbook SC15".

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MAX	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 28\ \text{V}; I_E = 0$	0.9	mA
		$V_{CB} = 35\ \text{V}; I_E = 0$	1.8	mA
I_{CES}	collector cut-off current	$V_{CE} = 28\ \text{V}; R_{BE} = 0\ \Omega$	1.8	mA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\ \text{V}; I_C = 0$	90	μA

APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ in a common-base test circuit and working in CW class B mode.

MODE OF OPERATION	f (GHz)	V_{CC} (V)	P_L (W)	G_p (dB)	η_c (%)	$Z_i; Z_L$ (Ω)
Class B (CW); note 1	1.6	28	≥ 30	≥ 7 ; typ. 8.2	≥ 45 ; typ. 52	see Figs 5 and 6
Class B - 100 ms 50%	1.6	28	typ. 38	typ. 8.8	typ. 56	

Note


1. May be used for narrowband or broadband amplifiers within the frequency range 1.4 to 1.8 GHz. Operation below 1.4 GHz may damage the transistor due to resonance of the internal output prematching circuit.

List of components (see Fig.4)


COMPONENT	DESCRIPTION	VALUE	DIMENSIONS	CATALOGUE NO.
L1, L2	5 turns 0.2 mm diameter copper wire		int. dia. 2 mm	
C1	DC blocking capacitor	100 pF		
C2	feedthrough bypass capacitor			Erie, ref.1250-003
C3, C4	trimmer capacitor	0.4 to 2.5 pF		Tekelec AT-3-7281SL
C5	electrolytic capacitor	150 μF		

NPN microwave power transistor

PLB16030U

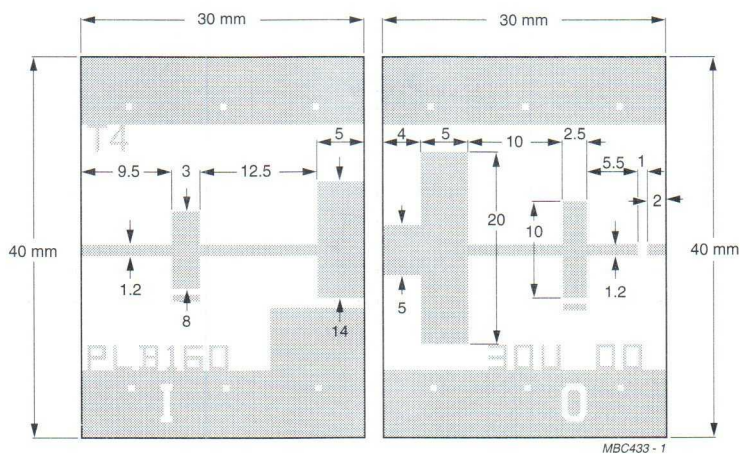

MBC433 - 1

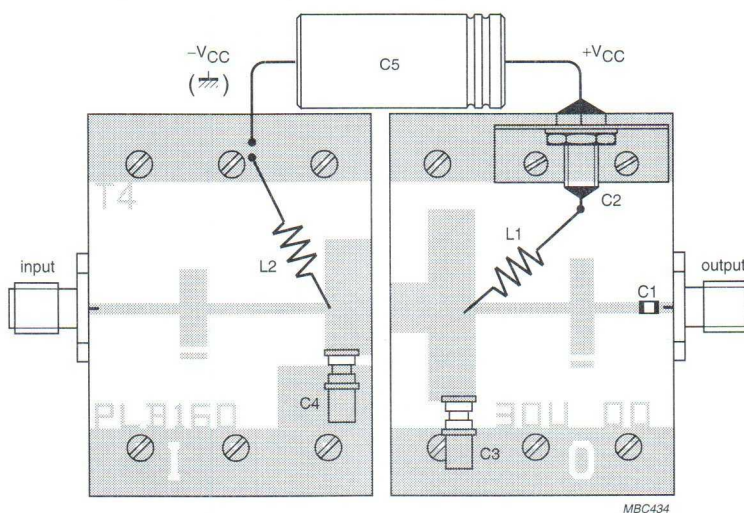


MBC434

Substrate: Teflon fibreglass.
 Thickness: 0.4 mm.
 Permittivity: $\epsilon_r = 2.55$.

Fig.4 Narrowband test circuit.


NPN microwave power transistor

PLB16030U

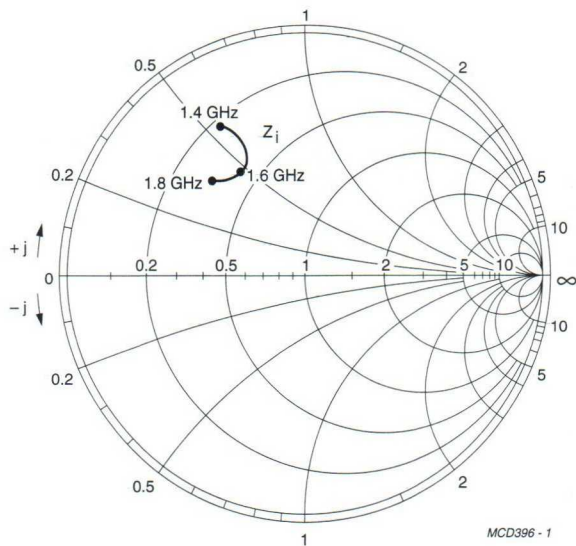

$V_{CC} = 28 \text{ V}$; $Z_0 = 10 \Omega$; $P_O = 30 \text{ W}$.

Fig.5 Input impedance as a function of frequency; typical values.

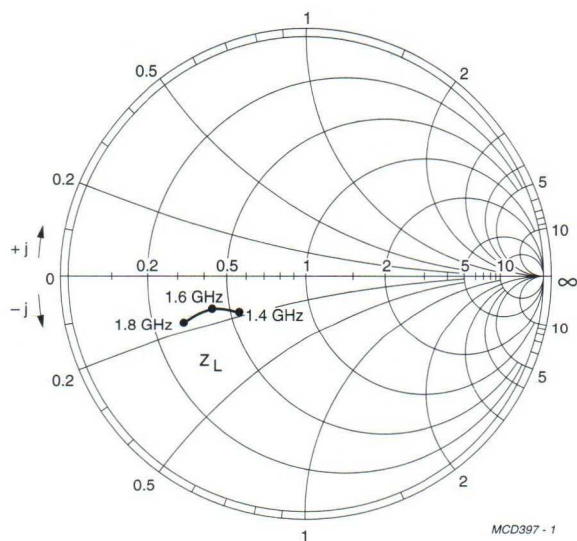

$V_{CC} = 28 \text{ V}$; $Z_0 = 10 \Omega$; $P_O = 30 \text{ W}$.

Fig.6 Optimum load impedance as a function of frequency; typical values.

NPN microwave power transistor

PPC5001T

FEATURES

- Diffused emitter ballasting resistors providing excellent current sharing and withstanding a high VSWR
- Interdigitated structure provides high emitter efficiency
- Gold metallization realizes very stable characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance

APPLICATIONS


Intended for use in common-collector oscillator circuits in military and professional applications up to 5 GHz.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT447A metal ceramic flange package.

PINNING - SOT447A

PIN	DESCRIPTION
1	base
2	emitter
3	collector

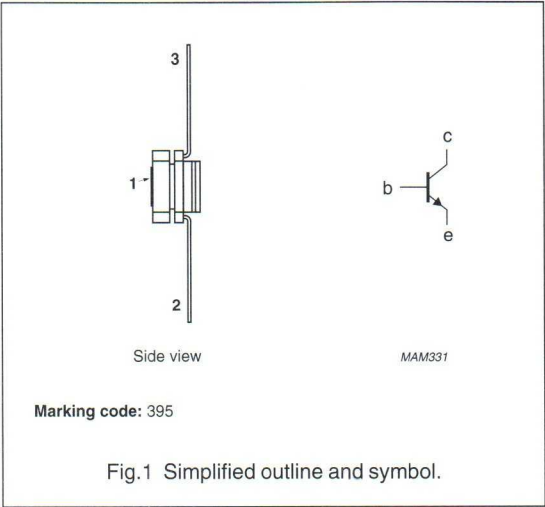

QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in an oscillator circuit up to 5 GHz; typical values.

MODE OF OPERATION	f (GHz)	V_{CE} (V)	I_C (mA)	P_L (mW)
Class A (CW)	5	20	200	450

NPN microwave power transistor

PPC5001T


LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	–	40	V
V_{CER}	collector-emitter voltage	$R_{BE} = 70 \Omega$	–	35	V
V_{CEO}	collector-emitter voltage	open emitter	–	16	V
V_{EBO}	emitter-base voltage	open collector	–	3	V
I_C	collector current (DC)		–	0.25	A
P_{tot}	total power dissipation	$T_{amb} \leq 75^\circ\text{C}$	–	4	W
T_{stg}	storage temperature		–65	+200	$^\circ\text{C}$
T_j	junction temperature		–	200	$^\circ\text{C}$
T_{slid}	soldering temperature	$t \leq 10 \text{ s}$; note 1	–	235	$^\circ\text{C}$

Note

1. At 0.1 mm from the case.

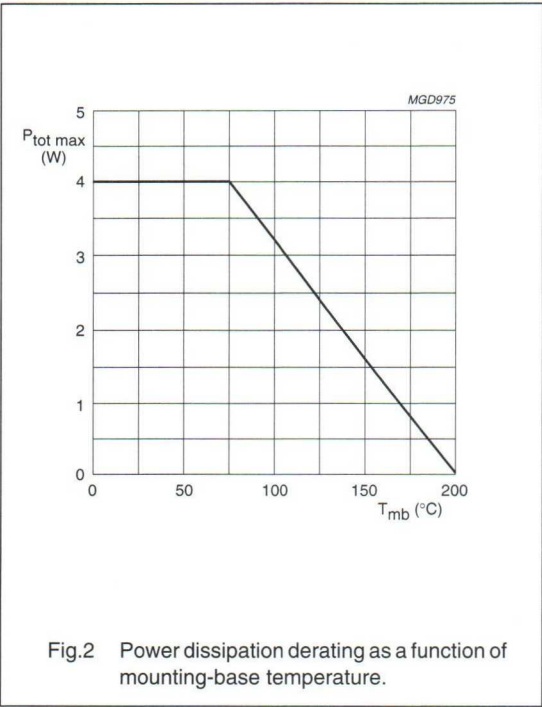

NPN microwave power transistor

PPC5001T

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	$T_j = 75\ ^\circ\text{C}$	24	K/W

CHARACTERISTICS

 $T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 24\ \text{V}; I_E = 0$	—	—	100	μA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\ \text{V}; I_C = 0$	—	—	200	nA
$V_{(BR)CBO}$	collector-base breakdown voltage	$I_C = 500\ \mu\text{A}; I_E = 0$	40	—	—	V
$V_{(BR)CER}$	collector-emitter breakdown voltage	$I_C = 2.5\ \text{mA}; R_{BE} = 70\ \Omega$	35	—	—	V
C_{cb}	collector-base capacitance	$V_{CB} = 18\ \text{V}; V_{EB} = 1.5\ \text{V};$ $I_E = I_C = 0; f = 1\ \text{MHz}$	—	1.4	—	pF
C_{ce}	collector-emitter capacitance	$V_{CE} = 18\ \text{V}; V_{EB} = 1.5\ \text{V};$ $I_E = I_C = 0; f = 1\ \text{MHz}$	—	0.9	—	pF
C_{eb}	emitter-base capacitance	$V_{CB} = 10\ \text{V}; V_{EB} = 1\ \text{V};$ $I_C = I_E = 0; f = 1\ \text{MHz}$	—	5.5	—	pF

NPN microwave power transistor

PPC5001T

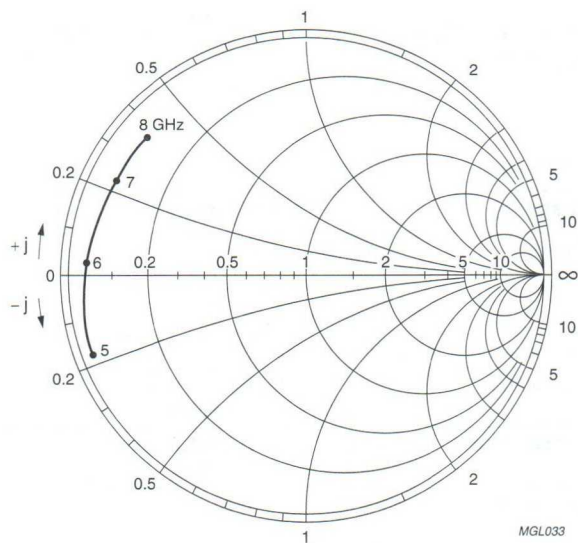
 $V_{CE} = 20 \text{ V}; I_C = 200 \text{ mA}; Z_0 = 50 \Omega.$

Fig.3 Emitter reflection coefficient.

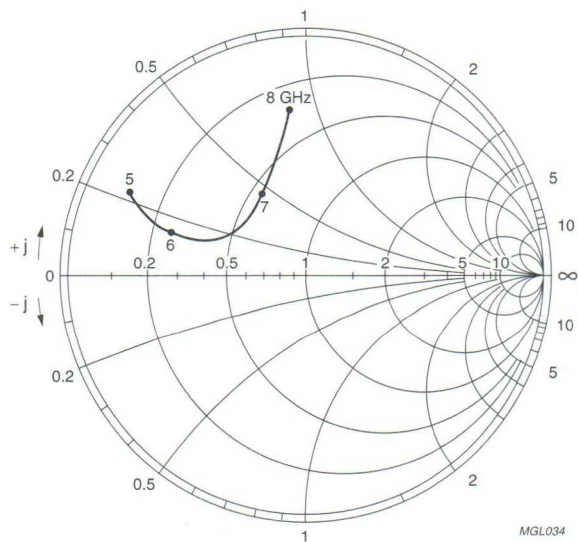
 $V_{CE} = 20 \text{ V}; I_C = 200 \text{ mA}; Z_0 = 50 \Omega.$

Fig.4 Base reflection coefficient

NPN microwave power transistors

PTB23001X; PTB23003X;
PTB23005X

FEATURES

- Diffused emitter ballasting resistors providing excellent current sharing and withstanding a high VSWR
- Interdigitated structure provides high emitter efficiency
- Multicell geometry gives good balance of dissipated power and low thermal resistance
- Localized thick oxide auto-alignment process and gold sandwich metallization ensure an optimum temperature profile and excellent performance and reliability.

APPLICATIONS

Common-base, class B power amplifiers up to 4.2 GHz.

DESCRIPTION


NPN silicon planar epitaxial microwave power transistor in a metal ceramic SOT440A flange package with base connected to the flange.

MARKING

TYPE NUMBER	MARKING CODE
PTB23001X	2301X
PTB23003X	2303X
PTB23005X	2305X

PINNING - SOT440A

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

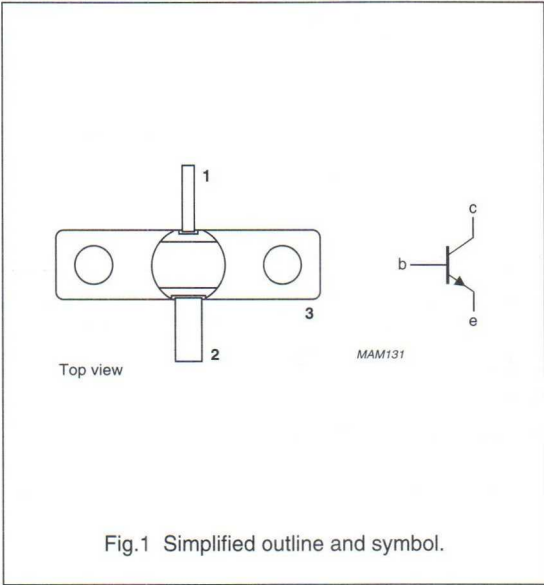

QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common-base class B circuit.

TYPE NUMBER	MODE OF OPERATION	f (GHz)	V _{CC} (V)	P _L (W)	G _{po} (dB)	η _c (%)	Z _i (Ω)	Z _L (Ω)
PTB23001X	CW	2	24	≥1	≥7	≥45	8 + j14	8 + j20
PTB23003X	CW	2	24	≥3	≥8.75	≥45	2.5 + j14	8 + j6
PTB23005X	CW	2	24	≥5	≥9.2	≥50	1.9 + j12	7.5 + j3

WARNING1

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

NPN microwave power transistors

PTB23001X; PTB23003X;
PTB23005X



LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	–	40	V
V_{CEO}	collector-emitter voltage	open base	–	15	V
V_{CES}	collector-emitter voltage	$R_{BE} = 0 \ \Omega$	–	40	V
I_C	collector current (DC)				A
	PTB23001X		–	0.25	A
	PTB23003X		–	0.5	A
	PTB23005X		–	0.75	A
P_{tot}	total power dissipation	$T_{mb} = 75 \ ^\circ\text{C}; f > 1 \text{ MHz}$			W
	PTB23001X		–	4.2	W
	PTB23003X		–	7.6	W
	PTB23005X		–	8.7	W
T_{stg}	storage temperature		–65	+200	$^\circ\text{C}$
T_j	operating junction temperature		–	200	$^\circ\text{C}$
T_{sld}	soldering temperature	$t \leq 10 \text{ s; note 1}$	–	235	$^\circ\text{C}$


Note

- Up to 0.3 mm from ceramic.

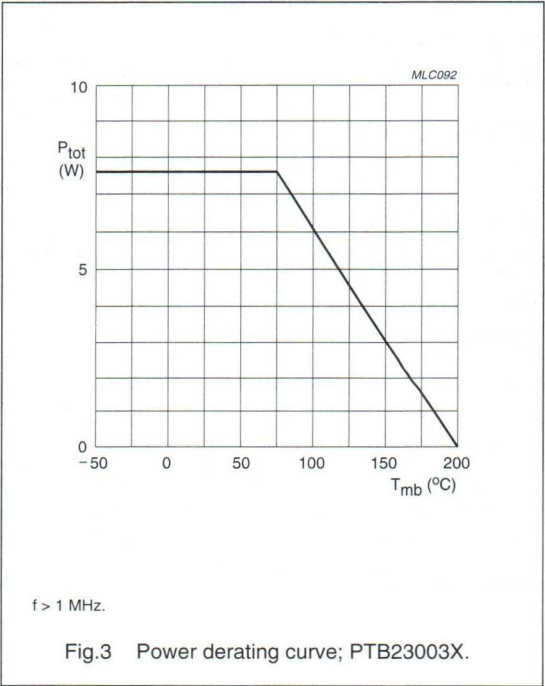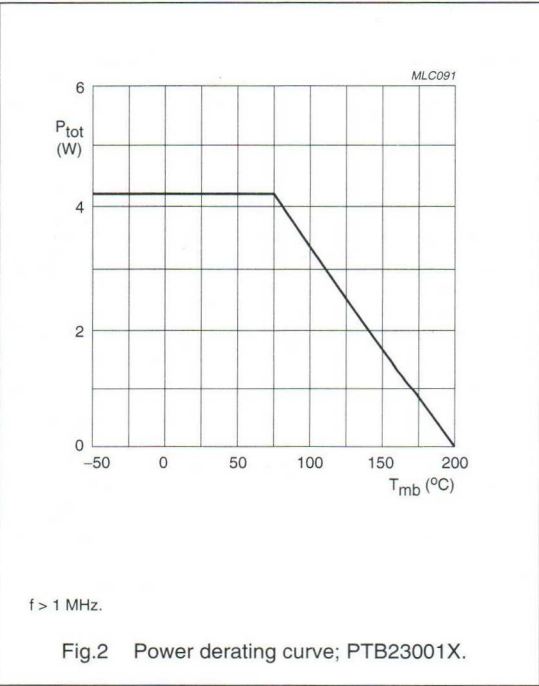

NPN microwave power transistors

PTB23001X; PTB23003X;
PTB23005X

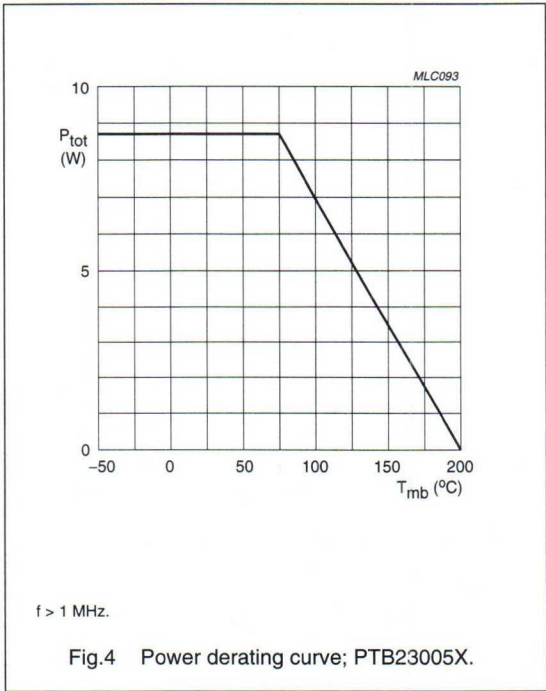

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	$T_j = 75\text{ °C}$		
	PTB23001X		22	K/W
	PTB23003X		12	K/W
	PTB23005X		10.5	K/W
$R_{th\ mb-h}$	thermal resistance from mounting base to heatsink	$T_j = 75\text{ °C}$; note 1	0.7	K/W

Note

1. See "Mounting recommendations in the General part of handbook SC15".

NPN microwave power transistors

PTB23001X; PTB23003X;
PTB23005X

CHARACTERISTICS

 $T_{mb} = 25\text{ }^{\circ}\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_{(BR)CBO}$	collector-base breakdown voltage					
	PTB23001X	$I_C = 1\text{ mA}; I_E = 0$	40	—	—	V
	PTB23003X	$I_C = 2\text{ mA}; I_E = 0$	40	—	—	V
	PTB23005X	$I_C = 3\text{ mA}; I_E = 0$	40	—	—	V
$V_{(BR)CES}$	collector-emitter breakdown voltage	$I_C = 10\text{ mA}; R_{BE} = 0\text{ }\Omega$	40	—	—	V
I_{CBO}	collector cut-off current					
	PTB23001X	$V_{CE} = 24\text{ V}; I_E = 0$	—	—	10	μA
	PTB23003X	$V_{CE} = 24\text{ V}; I_E = 0$	—	—	20	μA
	PTB23005X	$V_{CE} = 24\text{ V}; I_E = 0$	—	—	30	μA
I_{EBO}	emitter cut-off current					
	PTB23001X	$V_{EB} = 1.5\text{ V}; I_C = 0$	—	—	0.2	μA
	PTB23003X	$V_{EB} = 1.5\text{ V}; I_C = 0$	—	—	0.4	μA
	PTB23005X	$V_{EB} = 1.5\text{ V}; I_C = 0$	—	—	0.6	μA
C_{cb}	collector-base capacitance					
	PTB23001X	$I_E = I_C = 0; V_{CB} = 24\text{ V}; V_{EB} = 1.5\text{ V}; f = 1\text{ MHz}$	—	2.2	—	pF
	PTB23003X	$I_E = I_C = 0; V_{CB} = 24\text{ V}; V_{EB} = 1.5\text{ V}; f = 1\text{ MHz}$	—	3	—	pF
	PTB23005X	$I_E = I_C = 0; V_{CB} = 24\text{ V}; V_{EB} = 1.5\text{ V}; f = 1\text{ MHz}$	—	3.8	—	pF
C_{ce}	collector-emitter capacitance					
	PTB23001X	$I_E = I_C = 0; V_{CB} = 24\text{ V}; V_{EB} = 1.5\text{ V}; f = 1\text{ MHz}$	—	0.3	—	pF
	PTB23003X	$I_E = I_C = 0; V_{CB} = 24\text{ V}; V_{EB} = 1.5\text{ V}; f = 1\text{ MHz}$	—	0.6	—	pF
	PTB23005X	$I_E = I_C = 0; V_{CB} = 24\text{ V}; V_{EB} = 1.5\text{ V}; f = 1\text{ MHz}$	—	0.9	—	pF

APPLICATION INFORMATION


Microwave performance in a common-base class B selective amplifier circuit; see note 1.

MODE OF OPERATION	TYPE NUMBER	f (GHz)	V_{CC} (V)	P_L (W)	G_{po} (dB)	η_c (%)
Class B (CW)	PTB23001X	2	24	>1; typ. 1.8	>7; typ. 9	>45; typ. 50
	PTB23003X	2	24	>3; typ. 4	>8.75; typ. 10	>45; typ. 50
	PTB23005X	2	24	>5; typ. 7	>9.2; typ. 11	>40; typ. 50

Note

1. Circuit consists of prematching circuit board in combination with complementary input and output slug tuners.

NPN microwave power transistors

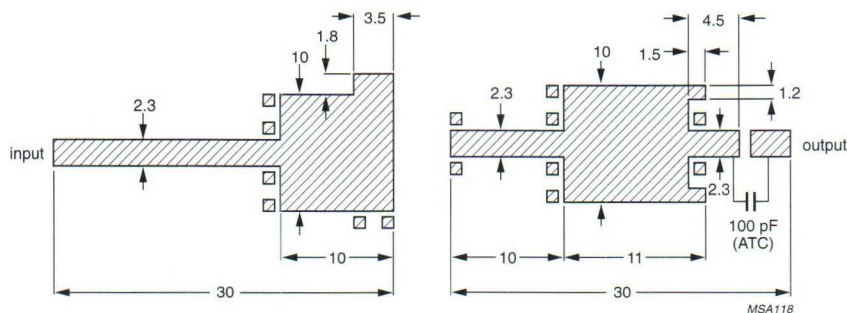PTB23001X; PTB23003X;
PTB23005X


Dimensions in mm.

Thickness: 0.8 mm.

Permittivity: $\epsilon_r = 2.55$.

Substrate: circuits on a double copper-clad printed board Teflon fibre glass dielectric.

Fig.5 Prematching test circuit board for PTB23001X.

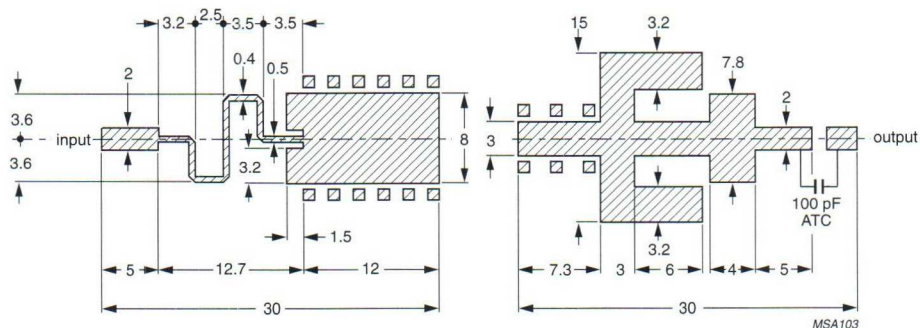

Dimensions in mm.


Thickness: 0.8 mm.

Permittivity: $\epsilon_r = 2.55$.

Substrate: circuits on a double copper clad printed-circuit board Teflon fibreglass dielectric.

Fig.6 Prematching test circuit board for PTB23003X.

NPN microwave power transistors

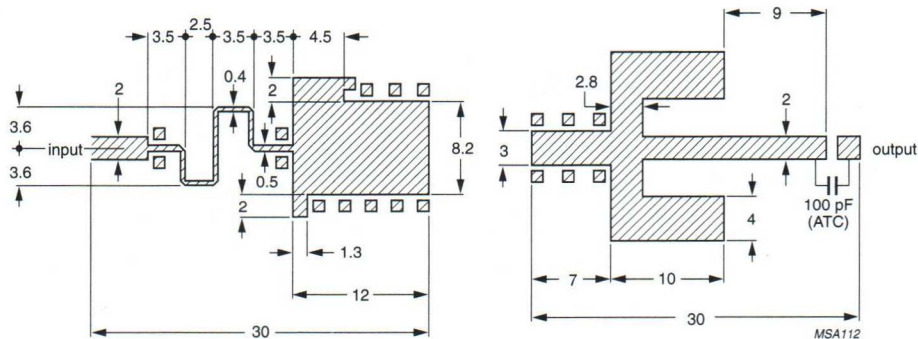PTB23001X; PTB23003X;
PTB23005X

Dimensions in mm.

Thickness: 0.8 mm.

Permittivity: $\epsilon_r = 2.55$.

Substrate: circuits on a double copper clad printed-circuit board Teflon fibreglass dielectric.

Fig.7 Prematching test circuit board for PTB23005X.

NPN microwave power transistor

PTB23002U

FEATURES

- Very high power gain
- Internal input prematching network
- Diffused emitter ballasting resistors improve ruggedness
- Interdigitated emitter-base structure
- Gold metallization with barrier layer to prevent electromigration and gold diffusion during life
- Multicell geometry improves power sharing and reduces thermal resistance.

APPLICATIONS

Common-base, class C power amplifiers at frequencies up to 2.3 GHz.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT440A hermetically sealed metal ceramic flange package, with base connected to flange.


QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common-base class C narrowband amplifier.

MODE OF OPERATION	f (GHz)	V _{CC} (V)	P _L (W)	G _p (dB)	η _c (%)	Z _i ; Z _L (Ω)
Class C (CW)	2.3	28	>2	>9	>45	see Figs 5 and 6

PINNING - SOT440A

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

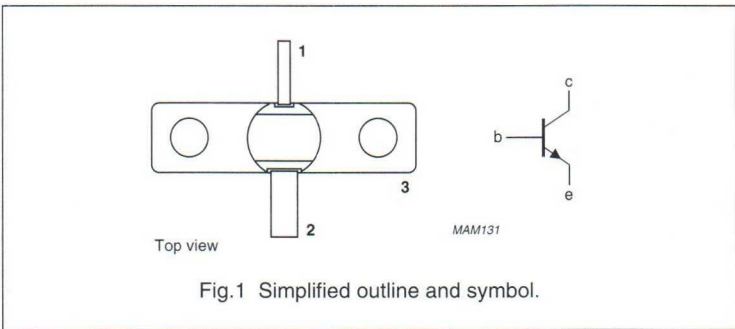

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

NPN microwave power transistor

PTB23002U



LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	—	40	V
V_{CEO}	collector-emitter voltage	open base	—	15	V
V_{CES}	collector-emitter voltage	$R_{BE} = 0 \Omega$	—	40	V
V_{EBO}	emitter-base voltage	open collector	—	3	V
I_C	collector current (DC)		—	0.25	A
P_{tot}	total power dissipation	$T_{mb} = 75^\circ\text{C}$	—	5	W
T_{stg}	storage temperature		-65	+200	$^\circ\text{C}$
T_j	operating junction temperature		—	200	$^\circ\text{C}$
T_{sld}	soldering temperature	$t \leq 10 \text{ s}$; note 1	—	235	$^\circ\text{C}$

Note

- Up to 0.2 mm from ceramic.

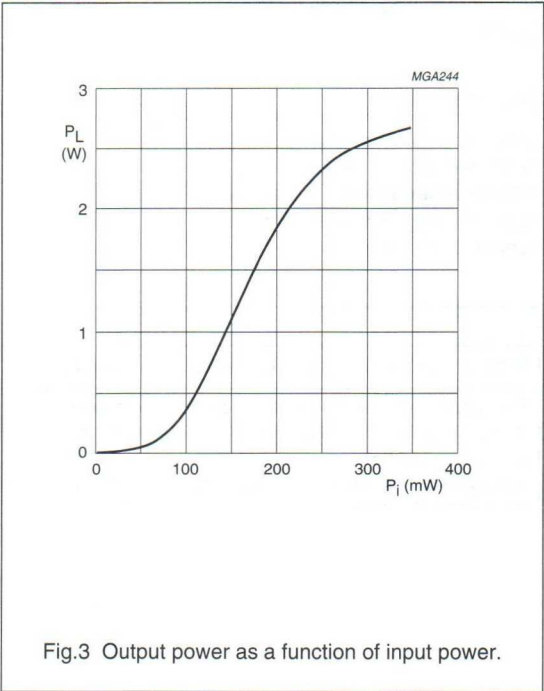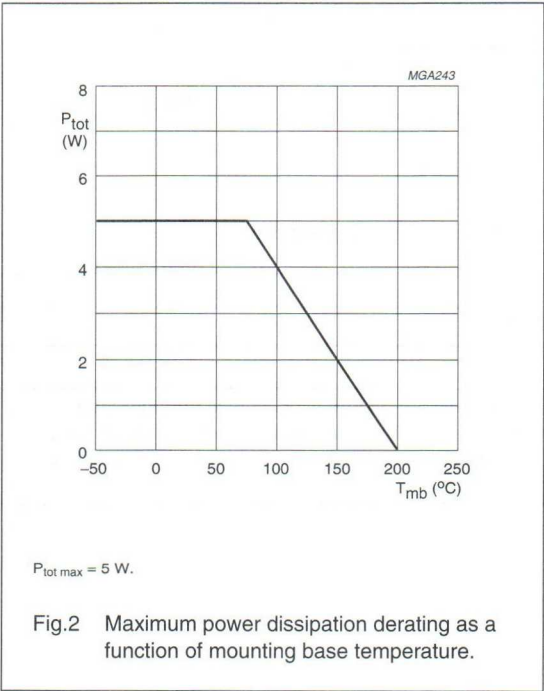

NPN microwave power transistor

PTB23002U

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	$T_j = 75\ ^\circ\text{C}$	22	K/W
$R_{th\ mb-h}$	thermal resistance from mounting base to heatsink	note 1	0.7	K/W

Note

1. See "Mounting recommendations in the General part of handbook SC15".

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
$V_{(BR)CBO}$	collector-base breakdown voltage	$I_C = 1\ \text{mA}; I_E = 0$	40	—	V
$V_{(BR)CES}$	collector-emitter breakdown voltage	$I_C = 1\ \text{mA}; R_{BE} = 0\ \Omega$	40	—	V
I_{CBO}	collector cut-off current	$V_{CE} = 30\ \text{V}; I_E = 0$	—	15	μA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\ \text{V}; I_C = 0$	—	1.5	μA

APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ in a common-base test circuit as shown in Fig.4 and working in CW class C mode.



MODE OF OPERATION	f (GHz)	V_{CC} (V)	P_L (W)	G_p (dB)	η_c (%)	$Z_i; Z_L$ (Ω)
Class C (CW)	2.3	28	≥ 2 ; typ. 2.3	≥ 9 ; typ. 9.6	≥ 45 ; typ. 50	see Figs 5 and 6

List of components (see Fig.4)

COMPONENT	DESCRIPTION	VALUE	DIMENSIONS	CATALOGUE NO.
L1, L2	3 turns 0.5 mm diameter copper wire		int.dia. = 2 mm	
C1	feedthrough bypass capacitor			Erie, ref.1250-003
C2	DC blocking capacitor	100 pF		
C3	tuning capacitor	0.5 - 5 pF		Tekelec 5855

NPN microwave power transistor

PTB23002U

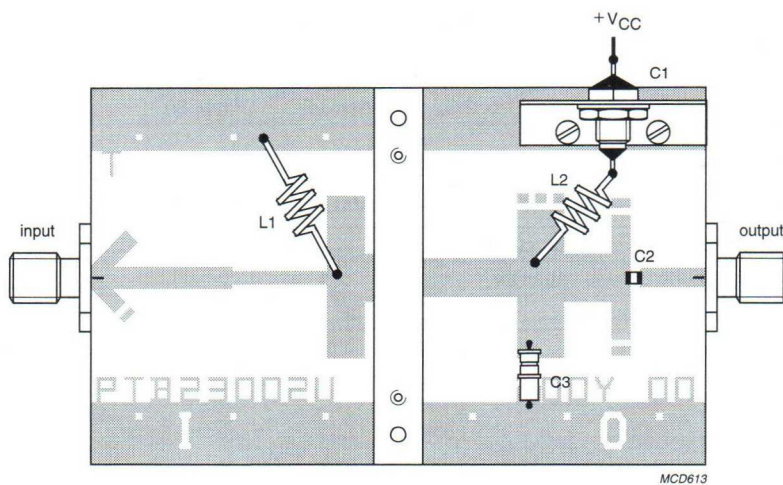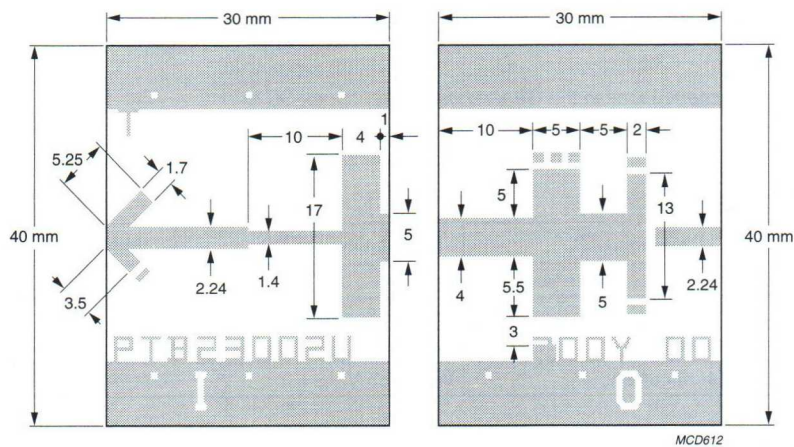


Substrate: PTFE fibreglass.
 Thickness: 0.8 mm.
 Permittivity: $\epsilon_r = 2.54$.

Fig.4 Prematching test circuit.


NPN microwave power transistor

PTB23002U

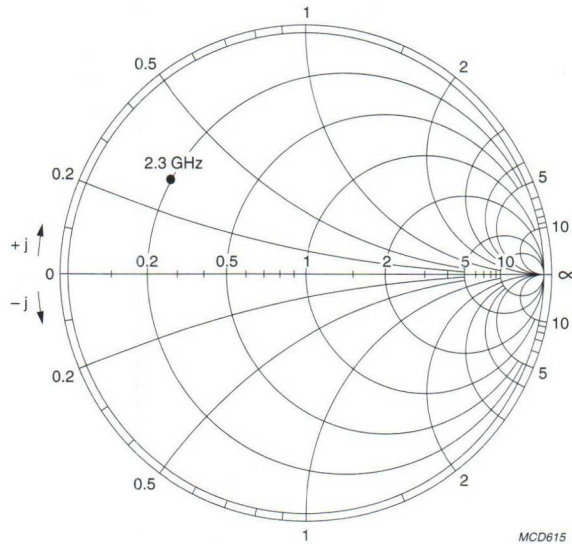

$V_{CC} = 28 \text{ V}$; $Z_0 = 50 \Omega$; $P_L = 2.3 \text{ W}$.

Fig.5 Input impedance as a function of frequency.

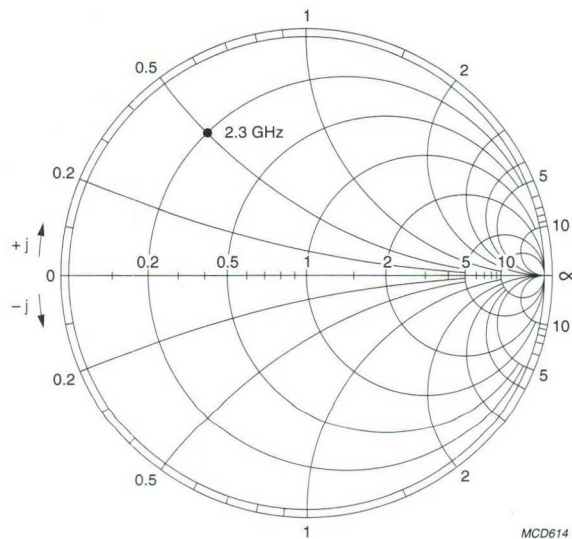

$V_{CC} = 28 \text{ V}$; $Z_0 = 50 \Omega$; $P_L = 2.3 \text{ W}$.

Fig.6 Optimum load impedance as a function of frequency.

Microwave power transistor

PTB23006U

FEATURES

- Very high power gain
- Diffused emitter ballasting resistors improve ruggedness
- Interdigitated emitter-base structure
- Gold metallization with barrier layer to prevent electromigration and gold diffusion during life
- Multicell geometry improves power sharing and reduces thermal resistance
- Internal input prematching network.

APPLICATIONS

Intended for use in common-base, class C power amplifiers at frequencies up to 2.3 GHz.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT440A hermetically sealed metal ceramic flange package, with base connected to flange.


QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common-base class C narrowband amplifier.

MODE OF OPERATION	f (GHz)	V _{CC} (V)	P _L (W)	G _p (dB)	η _c (%)	Z _i ; Z _L (Ω)
Class C (CW)	2	28	>5	>9	>40	see Figs 5 and 6

PINNING - SOT440A

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

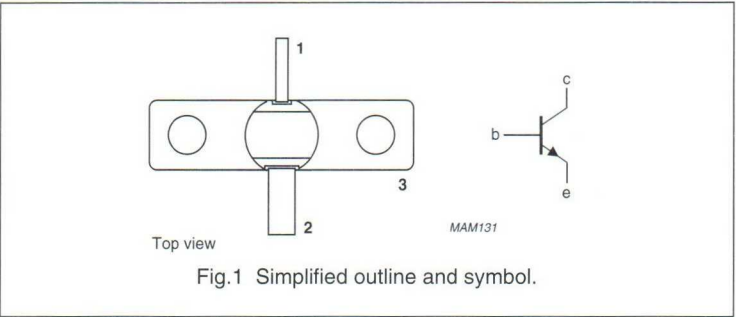

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO disc is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

Microwave power transistor

PTB23006U


LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	–	40	V
V_{CES}	collector-emitter voltage	$R_{BE} = 0$	–	40	V
V_{CEO}	collector-emitter voltage	open base	–	15	V
V_{EBO}	emitter-base voltage	open collector	–	3	V
I_C	collector current		–	0.75	A
P_{tot}	total power dissipation	$T_{mb} = 75\text{ }^{\circ}\text{C}$	–	11	W
T_{stg}	storage temperature		–65	+200	$^{\circ}\text{C}$
T_j	junction temperature		–	200	$^{\circ}\text{C}$
T_{sld}	soldering temperature	$t \leq 10\text{ s}$; note 1	–	235	$^{\circ}\text{C}$

Note

- 1. Up to 0.2 mm from ceramic.

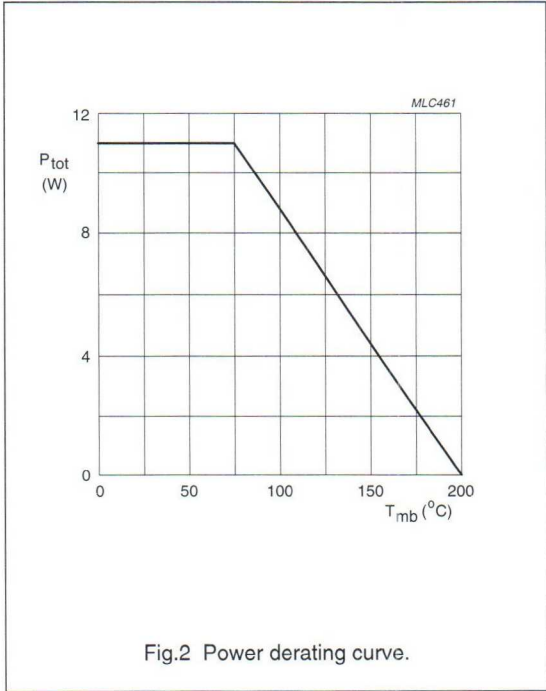

Microwave power transistor

PTB23006U

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	$T_j = 75\ ^\circ\text{C}$	8.5	K/W
$R_{th\ mb-h}$	thermal resistance from mounting base to heatsink	note 1	0.7	K/W

Note

1. See "Mounting recommendations in the General part of handbook SC15".

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
I_{CES}	collector cut-off current	$I_E = 0$; $V_{CE} = 30\ \text{V}$	—	300	μA
$V_{(BR)CBO}$	collector-base breakdown voltage	$I_C = 3\ \text{mA}$; $I_E = 0$	40	—	V
$V_{(BR)CES}$	collector-emitter breakdown voltage	$I_C = 3\ \text{mA}$; $R_{BE} = 0$	40	—	V
$V_{(BR)EBO}$	emitter-base breakdown voltage	$I_C = 1.5\ \text{mA}$	3	—	V
h_{FE}	DC current gain	$I_C = 450\ \text{mA}$; $V_{CE} = 3\ \text{V}$	15	150	



APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ in a common-base class C test circuit.

MODE OF OPERATION	f (GHz)	V_{CE} (V)	P_L (W)	G_p (dB)	η_c (%)	Z_i ; Z_L (Ω)
class C (CW)	2	28	>5 typ. 5.8	>9 typ. 10.5	>40 typ. 45	see Figs 5 and 6

Microwave power transistor

PTB23006U

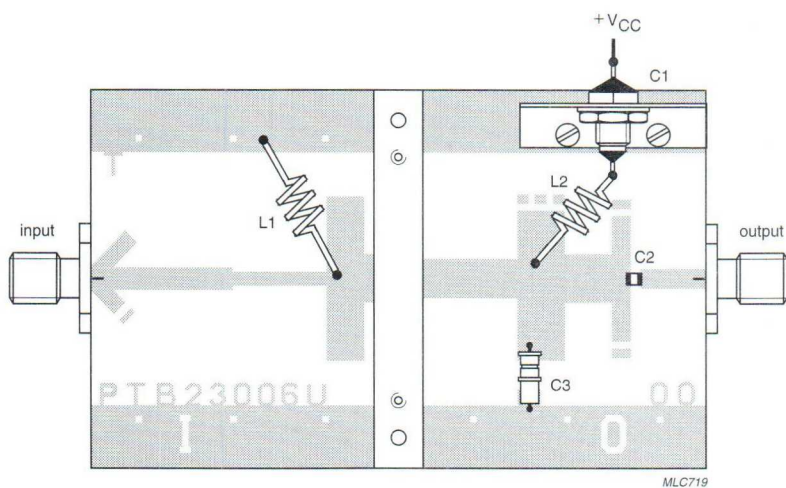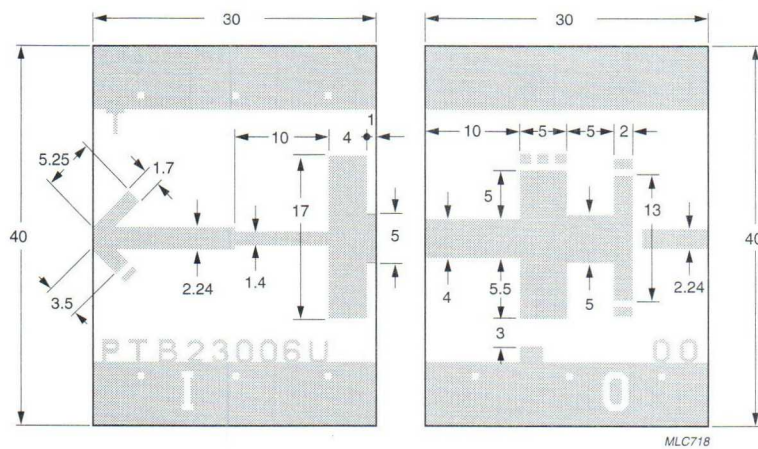

Dimensions in mm.
 Substrate: PTFE fibreglass.
 Thickness: 0.8 mm.
 Permittivity: $\epsilon_r = 2.54$.


Fig.3 Prematching test circuit.

Microwave power transistor

PTB23006U


List of components (see Fig.3)

COMPONENT	DESCRIPTION	VALUE	ORDERING INFORMATION
C1	feedthrough bypass capacitor		Erie1250-003
C2	DC blocking chip capacitor	100 pF	
C3	tuning capacitor	0.5 to 5 pF	Tekelec 5855
L1, L2	3 turns 0.5 mm copper wire; internal diameter = 2 mm		

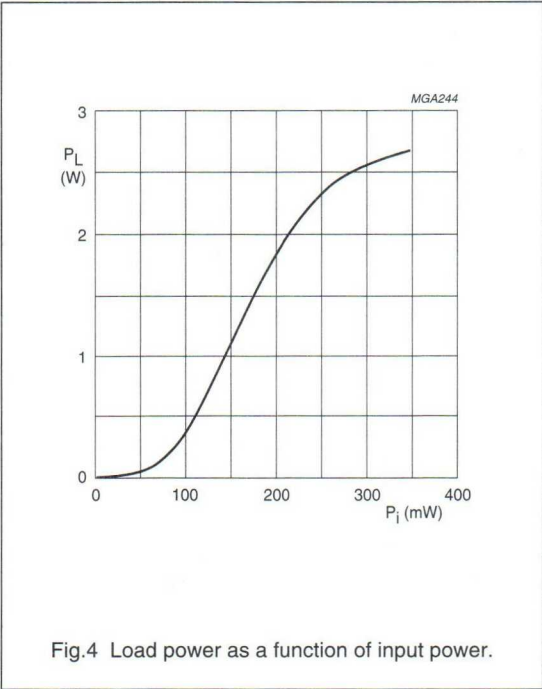


Microwave power transistor

PTB23006U

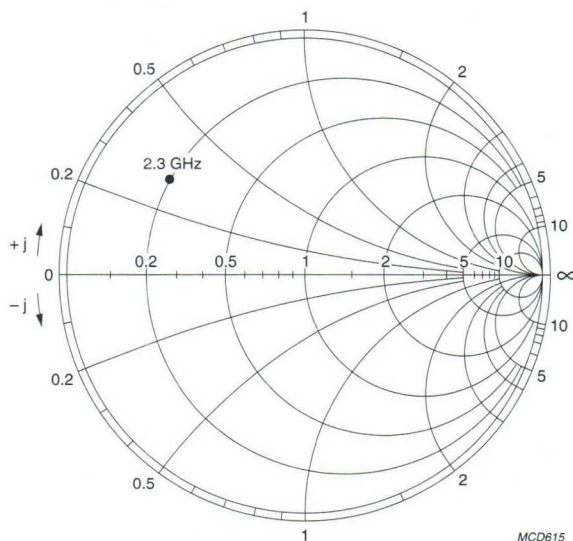

$V_{CC} = 28 \text{ V}$; $Z_0 = 50 \Omega$; $P_L = 2.3 \text{ W}$.

Fig.5 Input impedance as a function of frequency.

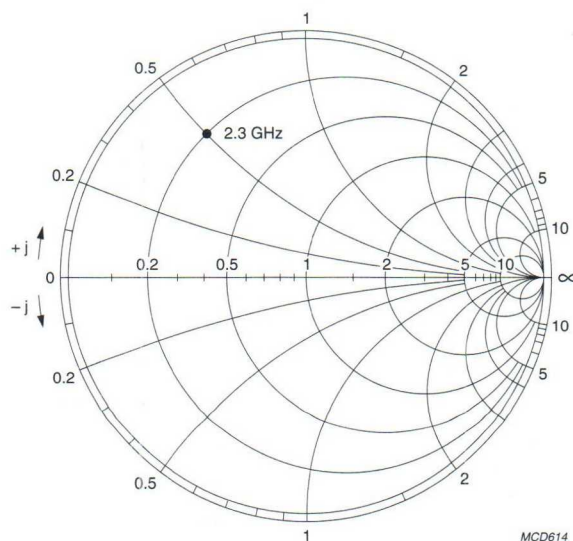

$V_{CC} = 28 \text{ V}$; $Z_0 = 50 \Omega$; $P_L = 2.3 \text{ W}$.

Fig.6 Optimum load impedance as a function of frequency.

NPN microwave power transistors

PTB32001X; PTB32003X;
PTB32005X

FEATURES

- Diffused emitter ballasting resistors providing excellent current sharing and withstanding a high VSWR
- Interdigitated structure provides high emitter efficiency
- Multicell geometry gives good balance of dissipated power and low thermal resistance
- Localized thick oxide auto-alignment process and gold sandwich metallization ensure an optimum temperature profile and excellent performance and reliability.

APPLICATIONS

Common-base, class B power amplifiers up to 4.2 GHz.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a metal ceramic SOT440A flange package with base connected to the flange.

MARKING

TYPE NUMBER	MARKING CODE
PTB32001X	3201X
PTB32003X	3203X
PTB32005X	3205X


QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common-base class B circuit.

TYPE NUMBER	MODE OF OPERATION	f (GHz)	V _{CC} (V)	P _L (W)	G _{po} (dB)	η _c (%)	Z _i (Ω)	Z _L (Ω)
PTB32001X	CW	3	24	≥1.3	≥8	≥35	15 + j31	5.5 + j10
PTB32003X	CW	3	24	≥2.5	≥8	≥35	5.5 + j29	5 – j2.2
PTB32005X	CW	3	24	≥4.5	≥8	≥35	2.8 + j20	4 – j7

PINNING - SOT440A

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

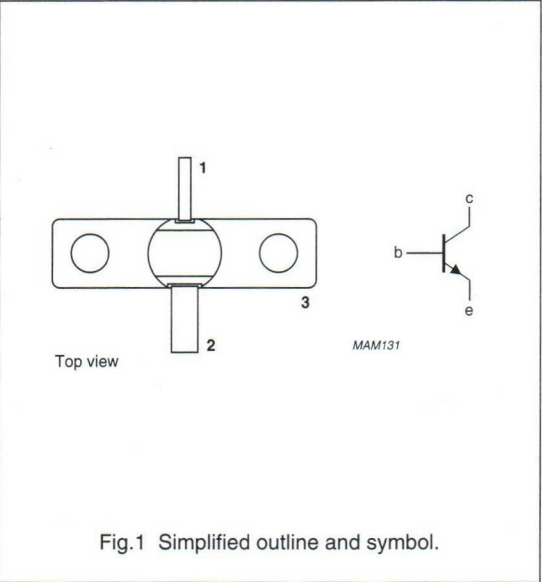

WARNING
Product and environmental safety - toxic materials
This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

NPN microwave power transistors

PTB32001X; PTB32003X;
PTB32005X



LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	—	40	V
V_{CEO}	collector-emitter voltage	open base	—	15	V
V_{CES}	collector-emitter voltage	$R_{BE} = 0 \Omega$	—	40	V
V_{EBO}	emitter-base voltage	open collector	—	3.0	V
I_C	collector current (DC)				
	PTB32001X		—	0.25	A
	PTB32003X		—	0.5	A
	PTB32005X		—	0.75	A
P_{tot}	total power dissipation	$T_{mb} \leq 75^\circ\text{C}; f > 1 \text{ MHz}$			
	PTB32001X		—	4.2	W
	PTB32003X		—	7.6	W
	PTB32005X		—	8.7	W
T_{stg}	storage temperature range		-65	+200	$^\circ\text{C}$
T_J	operating junction temperature		—	200	$^\circ\text{C}$
T_{sld}	soldering temperature	$t \leq 10 \text{ s}$; note 1	—	235	$^\circ\text{C}$


Note

- Up to 0.3 mm from ceramic.

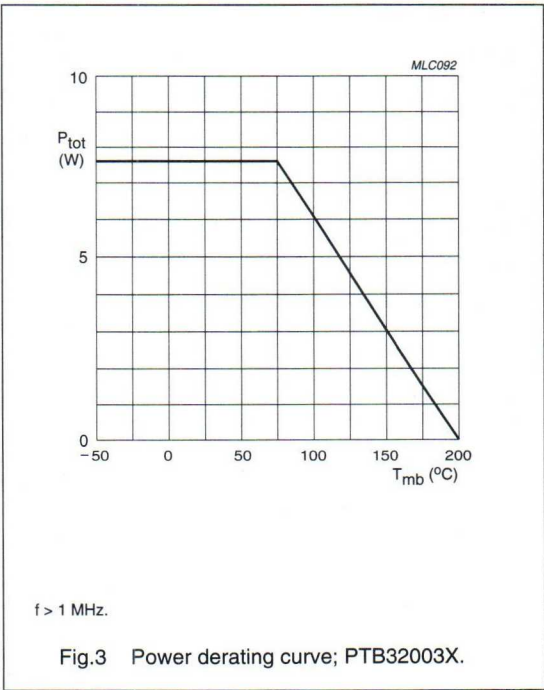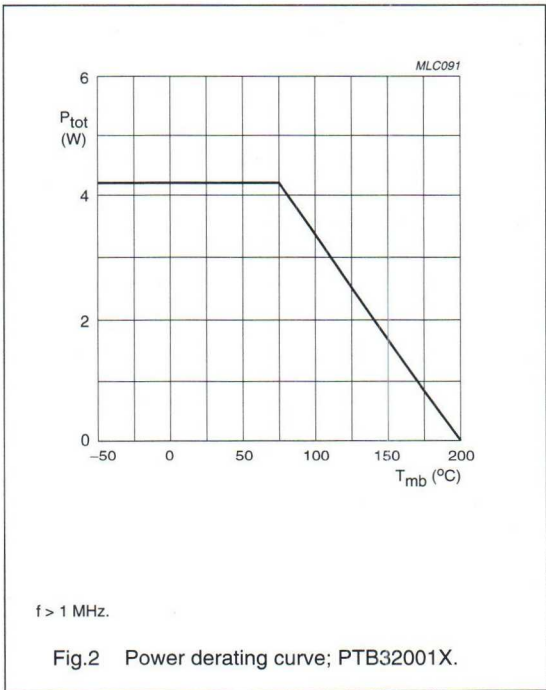

NPN microwave power transistors

PTB32001X; PTB32003X;
PTB32005X

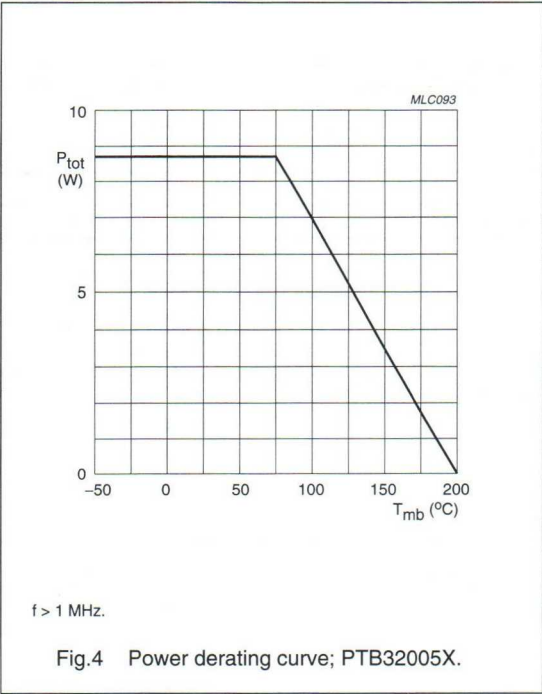

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	$T_j = 75\text{ °C}$		
	PTB32001X		22	K/W
	PTB32003X		12	K/W
	PTB32005X		10.5	K/W
$R_{th\ mb-h}$	thermal resistance from mounting base to heatsink	$T_j = 75\text{ °C}$; note 1	0.7	K/W

Note

1. See "Mounting recommendations in the General part of handbook SC15".

NPN microwave power transistors

PTB32001X; PTB32003X;
PTB32005X

CHARACTERISTICS

 $T_{mb} = 25\text{ }^{\circ}\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_{(BR)CBO}$	collector-base breakdown voltage					
	PTB32001X	$I_C = 1\text{ mA}; I_E = 0$	40	—	—	V
	PTB32003X	$I_C = 2\text{ mA}; I_E = 0$	40	—	—	V
	PTB32005X	$I_C = 3\text{ mA}; I_E = 0$	40	—	—	V
$V_{(BR)CES}$	collector-emitter breakdown voltage	$I_C = 10\text{ mA}; R_{BE} = 0\text{ }\Omega$	40	—	—	V
I_{CBO}	collector cut-off current					
	PTB32001X	$V_{CE} = 24\text{ V}; I_E = 0$	—	—	10	μA
	PTB32003X	$V_{CE} = 24\text{ V}; I_E = 0$	—	—	20	μA
	PTB32005X	$V_{CE} = 24\text{ V}; I_E = 0$	—	—	30	μA
I_{EBO}	emitter cut-off current					
	PTB32001X	$V_{EB} = 1.5\text{ V}; I_C = 0$	—	—	0.2	μA
	PTB32003X	$V_{EB} = 1.5\text{ V}; I_C = 0$	—	—	0.4	μA
	PTB32005X	$V_{EB} = 1.5\text{ V}; I_C = 0$	—	—	0.6	μA
C_{cb}	collector-base capacitance					
	PTB32001X	$I_E = I_C = 0; V_{CB} = 24\text{ V}; V_{EB} = 1.5\text{ V}; f = 1\text{ MHz}$	—	2.2	—	pF
	PTB32003X	$I_E = I_C = 0; V_{CB} = 24\text{ V}; V_{EB} = 1.5\text{ V}; f = 1\text{ MHz}$	—	3	—	pF
	PTB32005X	$I_E = I_C = 0; V_{CB} = 24\text{ V}; V_{EB} = 1.5\text{ V}; f = 1\text{ MHz}$	—	3.8	—	pF
C_{ce}	collector-emitter capacitance					
	PTB32001X	$I_E = I_C = 0; V_{CB} = 24\text{ V}; V_{EB} = 1.5\text{ V}; f = 1\text{ MHz}$	—	0.3	—	pF
	PTB32003X	$I_E = I_C = 0; V_{CB} = 24\text{ V}; V_{EB} = 1.5\text{ V}; f = 1\text{ MHz}$	—	0.6	—	pF
	PTB32005X	$I_E = I_C = 0; V_{CB} = 24\text{ V}; V_{EB} = 1.5\text{ V}; f = 1\text{ MHz}$	—	0.9	—	pF

APPLICATION INFORMATION


Microwave performance in a common-base class B selective amplifier circuit; see note 1.

MODE OF OPERATION	TYPE NUMBER	f (GHz)	V_{CC} (V)	P_L (W)	G_{po} (dB)	η_c (%)
Class B (CW)	PTB32001X	3	24	>1.3; typ. 1.8	>8; typ. 9.5	>35; typ. 45
	PTB32003X	3	24	>2.5; typ. 3.0	>8; typ. 9.5	>35; typ. 45
	PTB32005X	3	24	>4.5; typ. 5.5	>8; typ. 9.5	>35; typ. 45

Note

1. Circuit consists of prematching circuit board in combination with complementary input and output slug tuners.

NPN microwave power transistors

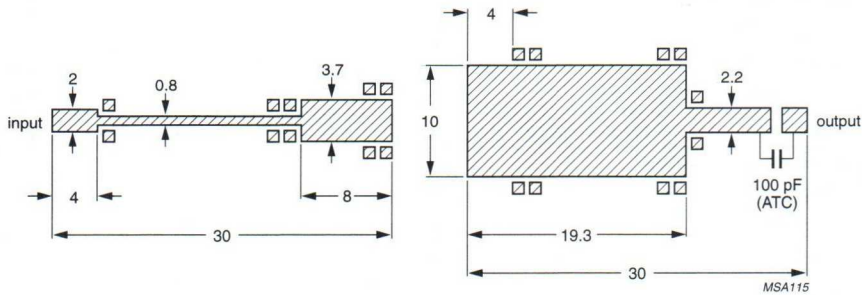PTB32001X; PTB32003X;
PTB32005X


Dimensions in mm.

Thickness: 0.8 mm.

Permittivity: $\epsilon_r = 2.55$.

Substrate: circuits on a double copper-clad printed-circuit board Teflon fibreglass dielectric.

Fig.5 Prematching test circuit board for PTB32001X.

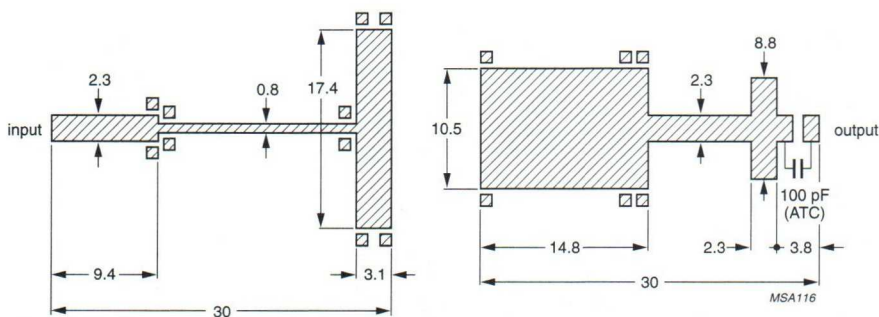

Dimensions in mm.


Thickness: 0.8 mm.

Permittivity: $\epsilon_r = 2.55$.

Substrate: circuits on a double copper-clad printed board Teflon fibre glass dielectric.

Fig.6 Prematching test circuit board for PTB32003X.

NPN microwave power transistors

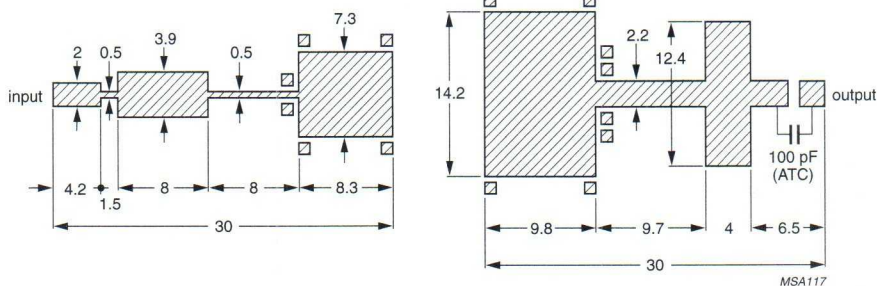PTB32001X; PTB32003X;
PTB32005X

Dimensions in mm.

Thickness: 0.8 mm.

Permittivity: $\epsilon_r = 2.55$.

Substrate: circuits on a double copper-clad printed board Teflon fibreglass dielectric.

Fig.7 Prematching test circuit board for PTB32005X.

NPN microwave power transistor

PTC4001T

FEATURES

- Diffused emitter ballasting resistors providing excellent current sharing and withstanding a high VSWR
- Interdigitated structure provides high emitter efficiency
- Gold metallization realizes very good characteristics stability and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance.

APPLICATIONS

Common collector oscillator circuits under CW conditions in military and professional applications up to 5 GHz.

DESCRIPTION

NPN silicon planar epitaxial microwave transistor in a SOT440A metal ceramic flange package with collector connected to flange.

QUICK REFERENCE DATA

Microwave performance up to $T_h = 25\text{ }^{\circ}\text{C}$ in an oscillator circuit up to 3 GHz.


MODE OF OPERATION	f (GHz)	V _{CC} (V)	P _L (mW)	I _C (mA)
class A (CW)	2.88 to 3; note 1	20	≥550	200

Note

1. Oscillating frequency should stabilize in this range.

PINNING - SOT440A

PIN	DESCRIPTION
1	base
2	emitter
3	collector connected to flange

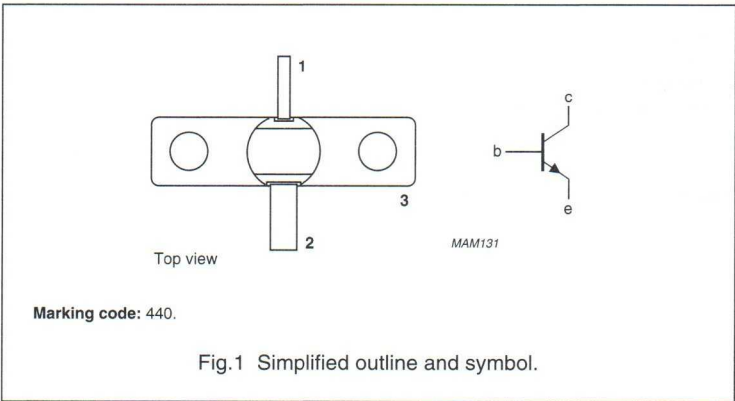

NPN microwave power transistor

PTC4001T



LIMITING VALUES

In accordance with the Absolute Maximum System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	–	40	V
V_{CEO}	collector-emitter voltage	open base	–	16	V
V_{CER}	collector-emitter voltage	$R_{BE} = 70\ \Omega$	–	35	V
V_{EBO}	emitter-base voltage	open collector	–	3	V
I_C	average collector current		–	0.25	A
P_{tot}	total power dissipation	$T_{mb} = 75\ ^\circ\text{C}$	–	4	W
T_{stg}	storage temperature		–65	+200	$^\circ\text{C}$
T_j	operating junction temperature		–	200	$^\circ\text{C}$
T_{sld}	soldering temperature	$t < 10\ \text{s}$; note 1	–	235	$^\circ\text{C}$

Note

1. At 0.1 mm from case.

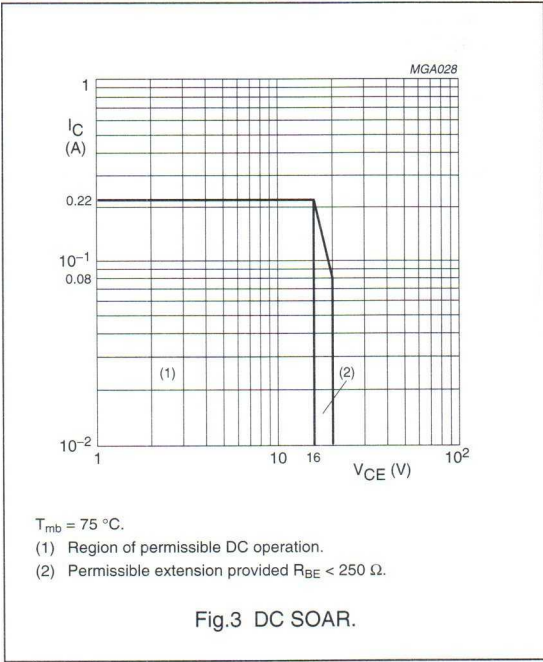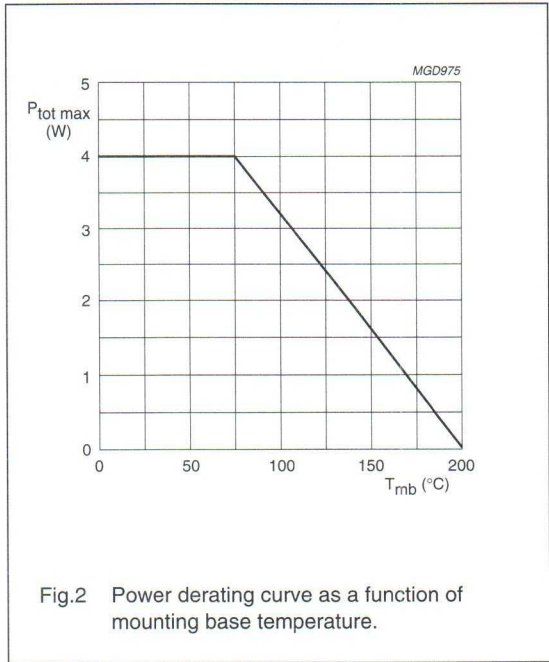

NPN microwave power transistor

PTC4001T

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	$T_j = 75\ ^\circ\text{C}$	22	K/W

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 24\ \text{V}; I_E = 0$	–	100	μA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\ \text{V}; I_C = 0$	–	0.75	μA
$V_{(BR)CBO}$	collector-base breakdown voltage	$I_C = 500\ \mu\text{A}; I_E = 0$	40	–	V
$V_{(BR)CER}$	collector-emitter breakdown voltage	$I_C = 2.5\ \text{mA}; R_{BE} = 70\ \Omega$	35	–	V

APPLICATION INFORMATION

Microwave performance up to $T_j = 25\ ^\circ\text{C}$ in a common collector test circuit and working in CW class A.

MODE OF OPERATION	f (GHz)	V_{CC} (V)	P_L (mW)	I_C (mA)
class A (CW)	2.88 to 3; note 1	20	550 to 750	200

Note

- Oscillating frequency should stabilize in this frequency range.

NPN microwave power transistor

PVB42004X

FEATURES

- Interdigitated structure provides high emitter efficiency
- Diffused emitter ballasting resistors providing excellent current sharing and withstanding a high VSWR
- Local thick oxide and gold sandwich metallization realizes very stable characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance.

APPLICATIONS


- Intended for use in common base class-B power amplifiers up to 4.2 GHz.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a 2-lead rectangular flange package with a ceramic cap (SOT445A) with the common base connected to the flange.

PINNING - SOT445A

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

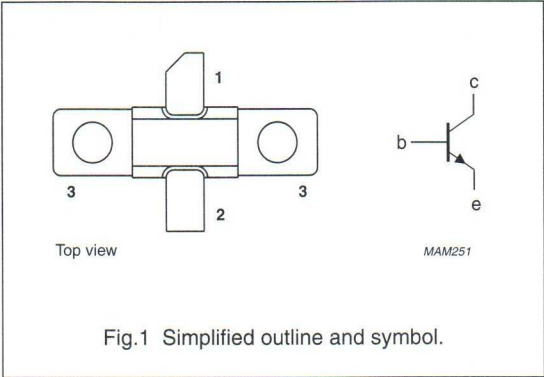

QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common base class-B test circuit.

MODE OF OPERATION	f (GHz)	V _{CC} (V)	P _L (W)	G _p (dB)	η _c (%)	Z _i (Ω)	Z _L (Ω)
Class-B (CW)	1	24	typ. 13	typ. 11	typ. 60	2.3 + j2.8	7.8 + j11.6
	2	24	typ. 10	typ. 10	typ. 48	1.4 + j9.5	3.9 + j2.6
	3	24	typ. 7.5	typ. 8.8	typ. 30	4.2 + j21	2.3 – j2.5
	4	24	typ. 4	typ. 6	typ. 25	38 – j32	1.9 – j8.5

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.


NPN microwave power transistor

PVB42004X

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CB0}	collector-base voltage	open emitter	–	40	V
V_{CEO}	collector-emitter voltage	open base	–	15	V
V_{CES}	collector-emitter voltage	$R_{BE} = 0\ \Omega$	–	40	V
V_{EBO}	emitter-base voltage	open collector	–	3	V
I_C	collector current		–	1	A
P_{tot}	total power dissipation	$T_{mb} = 75\ ^\circ\text{C}$	–	18	W
T_{stg}	storage temperature		–65	+200	$^\circ\text{C}$
T_j	operating junction temperature		–	200	$^\circ\text{C}$
T_{sld}	soldering temperature	at 0.1 mm from the case; $t \leq 10\text{ s}$	–	235	$^\circ\text{C}$

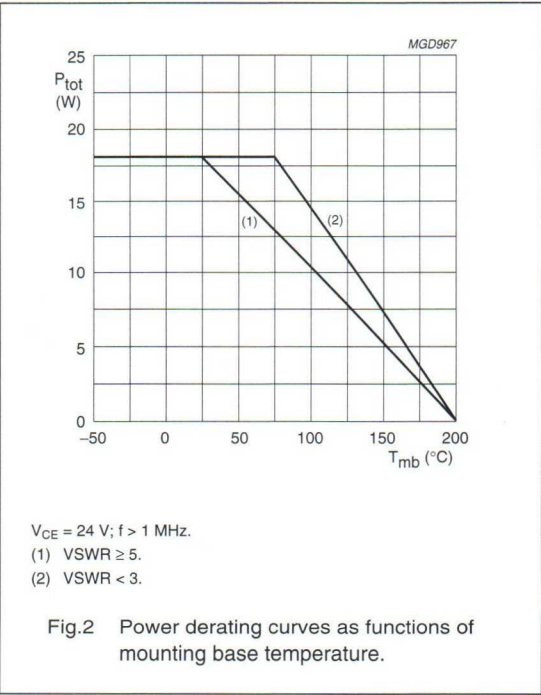

NPN microwave power transistor

PVB42004X

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	$T_j = 75\text{ }^{\circ}\text{C}$	6.5	K/W
$R_{th\ mb-h}$	thermal resistance from mounting-base to heatsink	$T_j = 75\text{ }^{\circ}\text{C}$; note 1	0.7	K/W



Note

1. See “Mounting recommendations in the General part of handbook SC15”.

CHARACTERISTICS

$T_{mb} = 25\text{ }^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_{(BR)CES}$	collector-emitter breakdown voltage	$I_C = 30\text{ mA}$; $R_{BE} = 0$	40	—	—	V
I_{CBO}	collector cut-off current	$V_{CB} = 24\text{ V}$; $I_E = 0$	—	—	50	mA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\text{ V}$; $I_C = 0$	—	—	1.5	mA
C_{cb}	collector-base capacitance	$V_{CB} = 24\text{ V}$; $V_{EB} = 1.5\text{ V}$; $I_E = I_C = 0$; $f = 1\text{ MHz}$	—	50	—	pF
C_{ce}	collector-emitter capacitance	$V_{CB} = 24\text{ V}$; $V_{EB} = 1.5\text{ V}$; $I_E = I_C = 0$; $f = 1\text{ MHz}$	—	1.2	—	pF
C_{eb}	emitter-base capacitance	$V_{CB} = 24\text{ V}$; $V_{EB} = 1\text{ V}$; $I_E = I_C = 0$; $f = 1\text{ MHz}$	—	30	—	pF

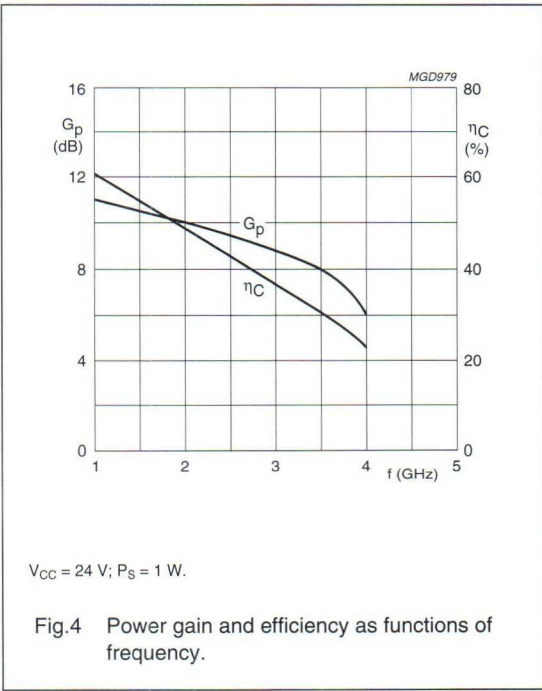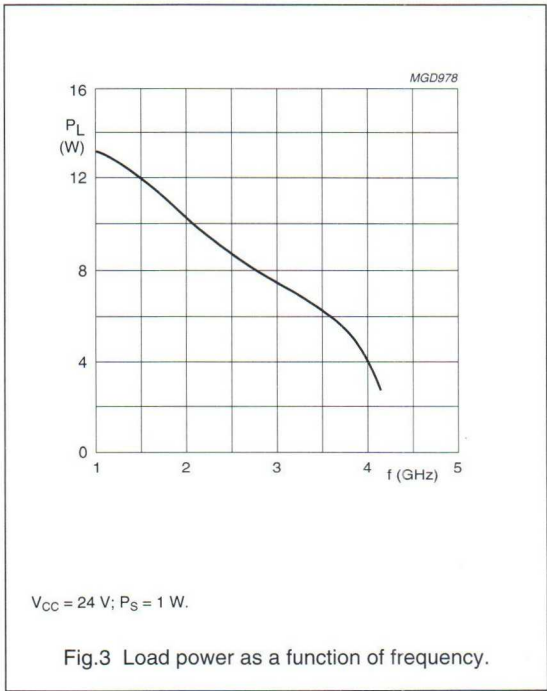

NPN microwave power transistor

PVB42004X

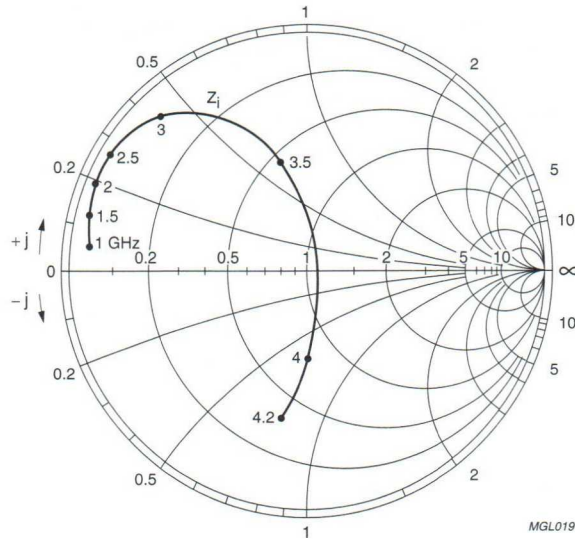

 $V_{CC} = 24 \text{ V}; P_S = 1 \text{ W}; Z_0 = 50 \Omega.$

Fig.5 Input impedance as a function of frequency; typical values.

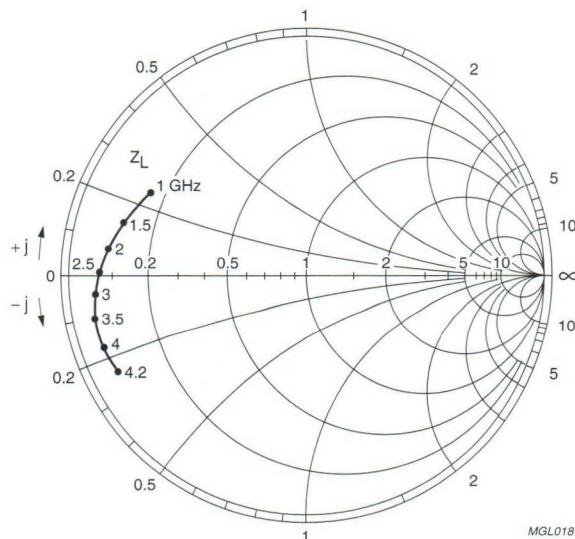

 $V_{CC} = 24 \text{ V}; P_S = 1 \text{ W}; Z_0 = 50 \Omega.$

Fig.6 Output impedance as a function of frequency; typical values.

NPN microwave power transistor

PXB16050U

FEATURES

- Input and output matching cells allow an easier design of circuits
- Diffused emitter ballasting resistors providing excellent current sharing and withstanding a high VSWR
- Interdigitated structure provides high emitter efficiency
- Gold metallization realizes very stable characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance.

APPLICATIONS

Common-base class C power amplifiers at frequencies between 1.5 and 1.8 GHz.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT439A metal ceramic flange package with base connected to the flange.


QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common base class C narrowband amplifier.

MODE OF OPERATION	f (GHz)	V _{CC} (V)	P _L (W)	G _{po} (dB)	η _C (%)	Z _i /Z _L (Ω)
Class C (CW)	1.65	28	>45	>8.5	>45	see Figs 6 and 7

PINNING - SOT439A

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

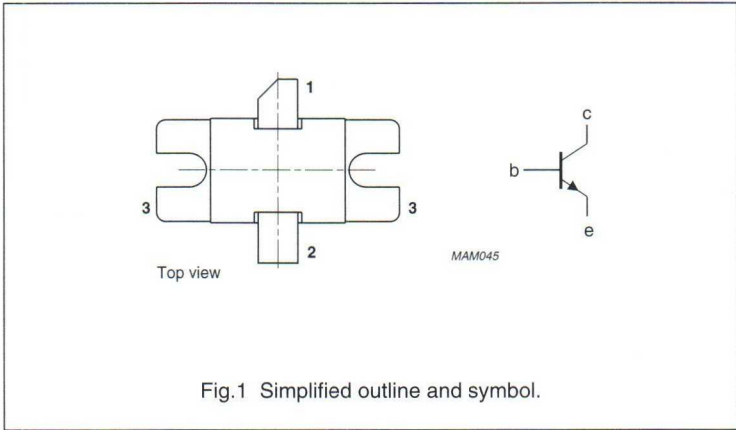

WARNING
Product and environmental safety - toxic materials
This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

NPN microwave power transistor

PXB16050U



LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V _{CB0}	collector-base voltage	open emitter	–	45	V
V _{CEO}	collector-emitter voltage	open base	–	15	V
V _{CES}	collector-emitter voltage	R _{BE} = 0 Ω	–	45	V
V _{EBO}	emitter-base voltage	open collector	–	3	V
I _C	collector current (DC)		–	6	A
P _{tot}	total power dissipation	T _{mb} = 75 °C	–	67	W
T _{stg}	storage temperature		–65	+200	°C
T _j	junction temperature		–	200	°C
T _{sld}	soldering temperature	t ≤ 10 s; note 1	–	235	°C

Note

1. Up to 0.2 mm from ceramic.

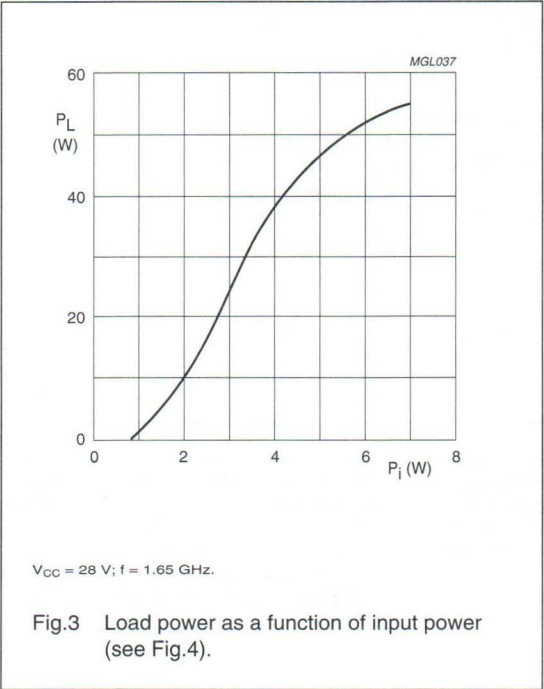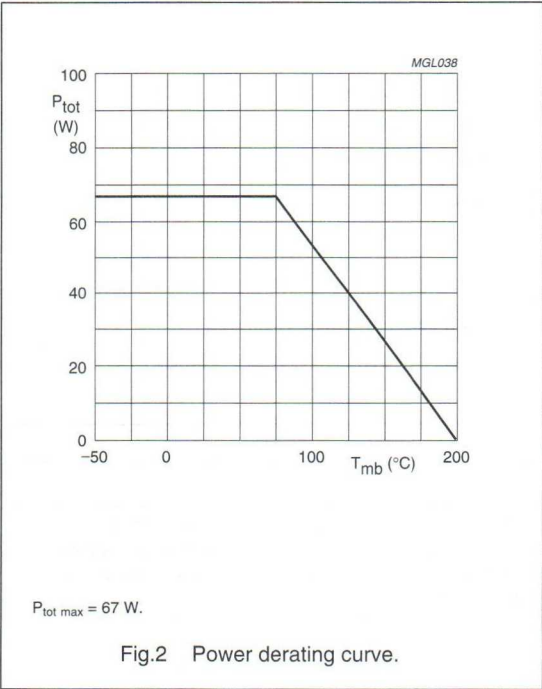

NPN microwave power transistor

PXB16050U

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	$T_J = 100\ ^\circ\text{C}$	1.5	K/W
$R_{th\ mb-h}$	thermal resistance from mounting base to heatsink	note 1	0.2	K/W

Note

- See "Mounting recommendations in the General part of handbook SC15".

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 40\ \text{V}; I_E = 0$	3	mA
		$V_{CB} = 45\ \text{V}; I_E = 0$	15	mA
I_{CES}	collector cut-off current	$V_{CE} = 30\ \text{V}; R_{BE} = 0$	3	mA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\ \text{V}; I_C = 0$	300	μA

APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ measured in the common base test circuit as shown in Fig.4 and working in CW class C mode.


MODE OF OPERATION	f (GHz)	V_{CC} (V)	P_L (W)	G_{po} (dB)	η_c (%)	Z_i/Z_L (Ω)
Class C (CW); see note 1	1.65	28	≥ 45 ; typ. 50	≥ 8.5 ; typ. 9.5	≥ 45 ; typ. 52	see Figs 6 and 7

Note

- Type PXB16050U may be used for narrowband or broadband amplifiers within the frequency range 1.5 to 1.8 GHz. Operation below 1.5 GHz may damage the transistor due to resonance of the internal output prematching circuit.

NPN microwave power transistor

PXB16050U

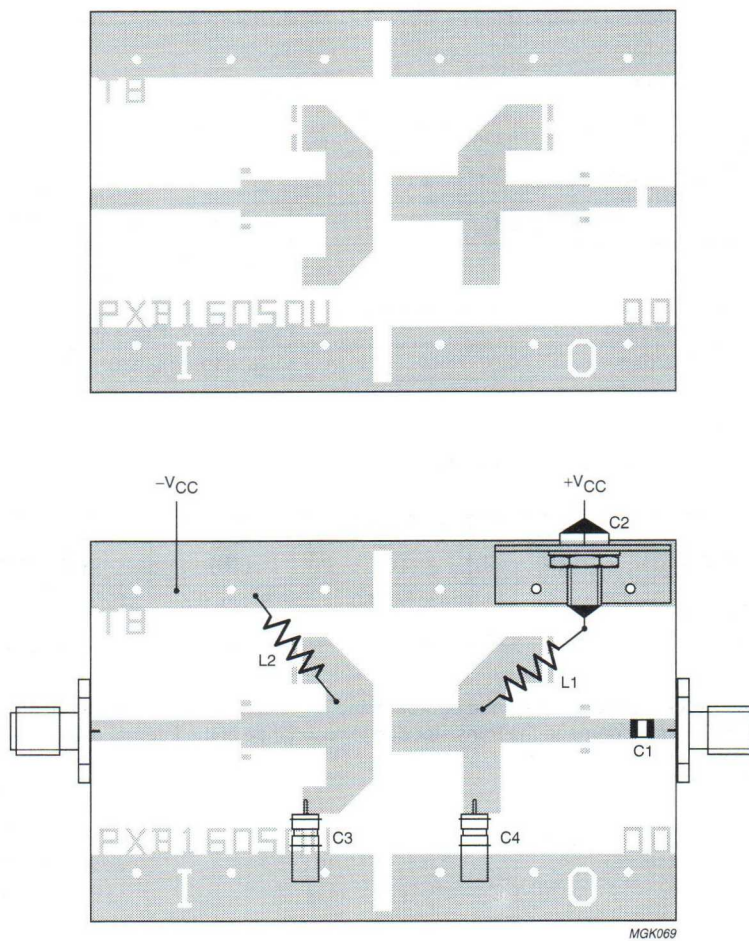

Substrate: Teflon fibreglass.

Permittivity: $\epsilon_r = 2.55$.


Thickness: 0.8 mm.

The narrowband test circuit is split into two totally independent halves each being 30 × 40 mm in size.

Fig.4 Narrowband test circuit.

NPN microwave power transistor

PXB16050U

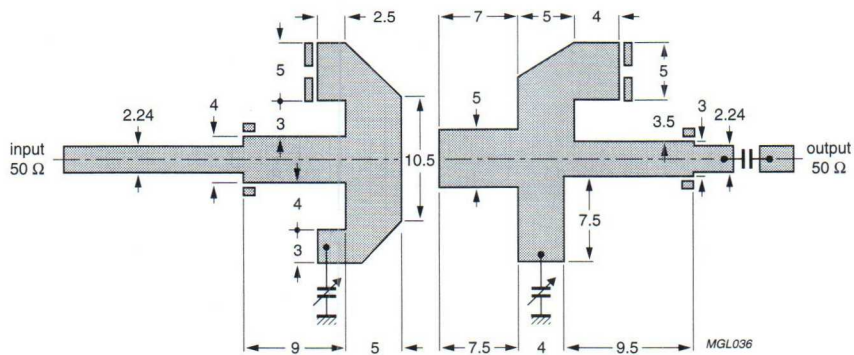

Dimensions in mm.


Fig.5 Narrowband test circuit dimensions.

List of components (see Fig.4)

COMPONENT	DESCRIPTION	VALUE	CATALOGUE NO.
L1	4 turns 0.5 mm diameter copper wire internal diameter = 2 mm	—	—
L2	5 turns 0.5 mm diameter copper wire internal diameter = 2 mm	—	—
C1	DC blocking capacitor	100 pF	ATC
C2	feedthrough bypass capacitor	—	Erie 1250-003
C3, C4	trimmer	0.6 to 4.5 pF	Tekelec AT-3-7271SL


NPN microwave power transistor

PXB16050U

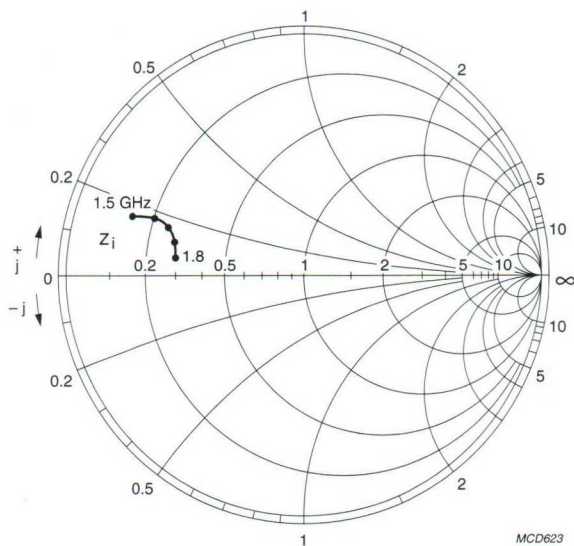

$V_{CC} = 28 \text{ V}$; $Z_O = 10 \Omega$.

Fig.6 Input impedance as a function of frequency; typical values.

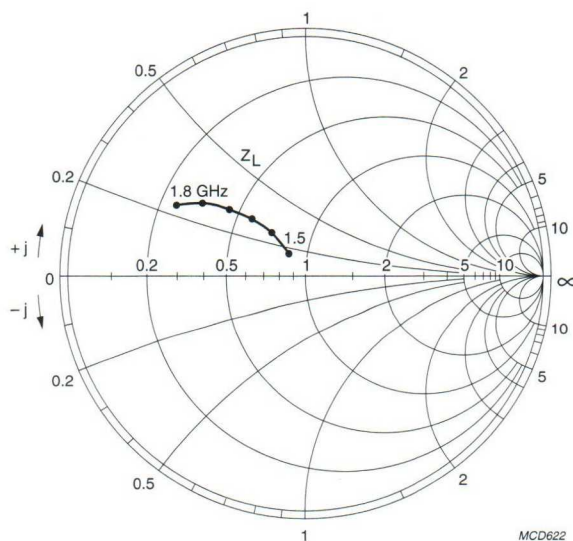

$V_{CC} = 28 \text{ V}$; $Z_O = 10 \Omega$.

Fig.7 Optimum load impedance as a function of frequency; typical values.

NPN microwave power transistor

PZ1418B15U

FEATURES

- Interdigitated structure provides high emitter efficiency
- Diffused emitter ballasting resistors providing excellent current sharing and withstanding a high VSWR
- Gold metallization realizes very stable characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance
- Internal input and output prematching ensures good stability and easy broadband use.

APPLICATIONS


- Common base class-B wideband amplifiers under CW conditions in military and professional applications, and to drive the type PZ1418B30U.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT443A metal ceramic flange package with the base connected to the flange.

PINNING - SOT443A

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

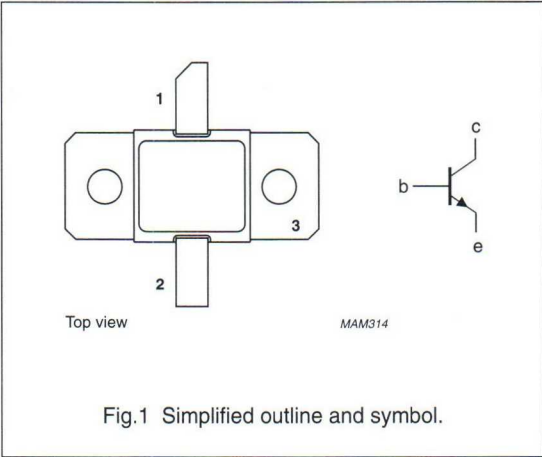

QUICK REFERENCE DATA

RF performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common base class-B wideband amplifier.

MODE OF OPERATION	f (GHz)	V _{CC} (V)	P _L (W)	G _p (dB)	η _c (%)	Z _i ; Z _L (Ω)
Class-B	1.4 to 1.8	28	≥12.5	≥7	≥38	see Figs 6 and 7

WARNING
Product and environmental safety - toxic materials
This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

NPN microwave power transistor

PZ1418B15U

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	–	40	V
V_{CEO}	collector-emitter voltage	open base	–	15	V
V_{CES}	collector-emitter voltage	$R_{BE} = 0\ \Omega$	–	35	V
V_{EBO}	emitter-base voltage	open collector	–	3	V
I_C	collector current (DC)		–	2	A
P_{tot}	total power dissipation	$T_{mb} \leq 75\ ^\circ\text{C}$	–	27	W
T_{stg}	storage temperature		–65	+200	$^\circ\text{C}$
T_j	operating junction temperature		–	200	$^\circ\text{C}$
T_{sld}	soldering temperature		–	235	$^\circ\text{C}$

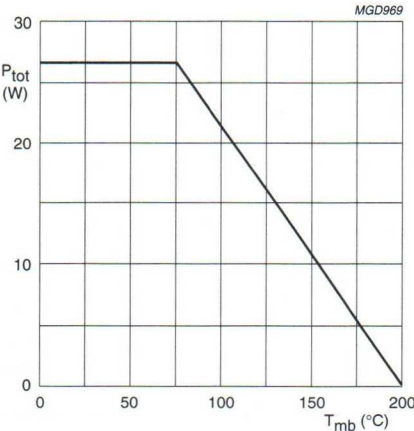


Fig.2 Power derating curve.

NPN microwave power transistor

PZ1418B15U

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting-base	$T_j = 75\text{ }^{\circ}\text{C}$	4	K/W
$R_{th\ mb-h}$	thermal resistance from mounting-base to heatsink	$T_j = 75\text{ }^{\circ}\text{C}$; note 1	0.2	K/W

Note

1. See "Mounting recommendations in the General part of handbook SC15".

CHARACTERISTICS


$T_{mb} = 25\text{ }^{\circ}\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 40\text{ V}; I_E = 0$	5	mA
		$V_{CB} = 30\text{ V}; I_E = 0$	2.5	mA
I_{CES}	collector cut-off current	$V_{CE} = 35\text{ V}; R_{BE} = 0$	25	mA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\text{ V}; I_C = 0$	100	μA

APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common base class B wideband amplifier.

MODE OF OPERATION	f (GHz)	V_{CC} (V)	P_L (W)	G_p (dB)	η_c (%)	$Z_i; Z_L$ (Ω)
Class-B	1.4 to 1.8	28	≥ 12.5 typ. 15	≥ 7 typ. 7.8	≥ 38 typ. 45	see Figs 6 and 7

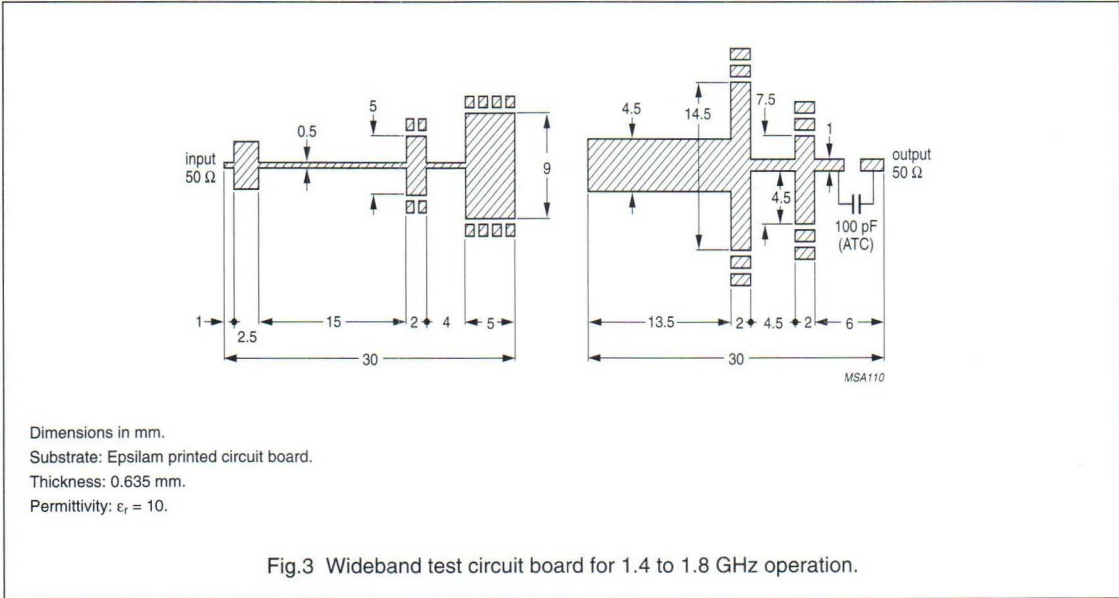

NPN microwave power transistor

PZ1418B15U

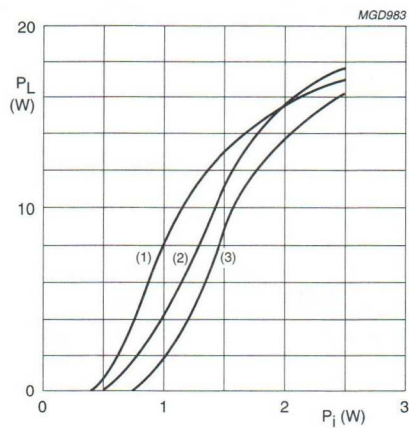


Fig. 4 Load power as a function of input power; typical values.

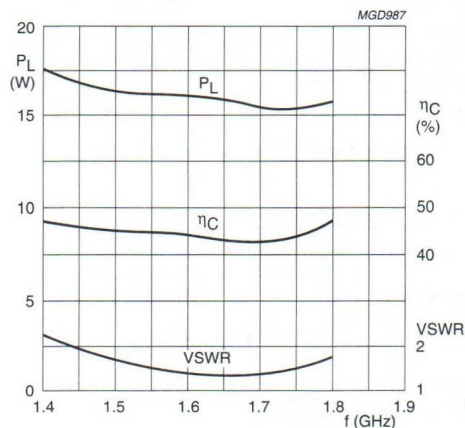


Fig. 5 Load power, efficiency and VSWR as functions of frequency; typical values.

NPN microwave power transistor

PZ1418B15U

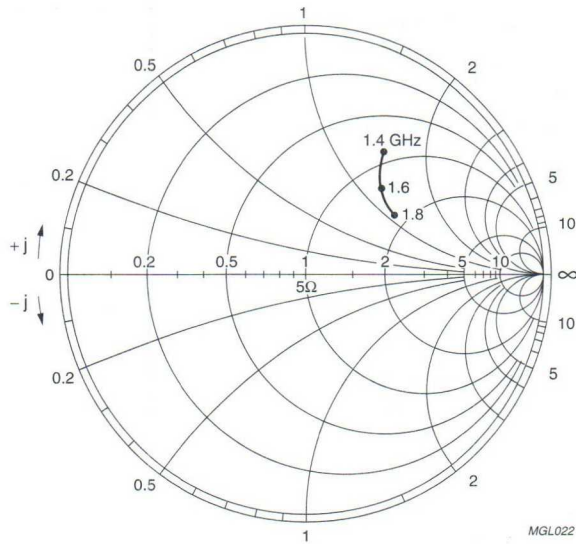
 $Z_0 = 5 \Omega$.

Fig.6 Input impedance as a function of frequency; typical values.

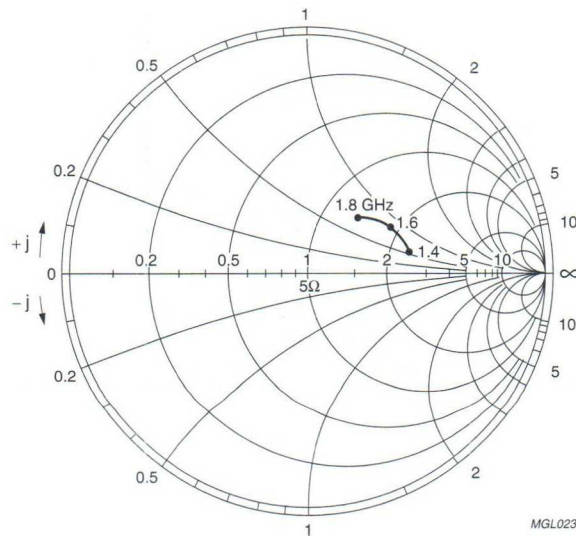
 $Z_0 = 5 \Omega$.

Fig.7 Optimum load impedance as a function of frequency; typical values.

NPN microwave power transistors

**PZ1418B30U; PZ1721B25U;
PZ2024B20U**

FEATURES

- Interdigitated structure provides high emitter efficiency
- Diffused emitter ballasting resistors providing excellent current sharing and withstanding a high VSWR
- Gold metallization realizes very stable characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance
- Internal input and output prematching ensures good stability and easy broadband use.

APPLICATIONS


- Common base class-B broadband amplifiers under CW conditions in military and professional applications.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT443A metal ceramic flange package with the base connected to the flange.

PINNING - SOT443A

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

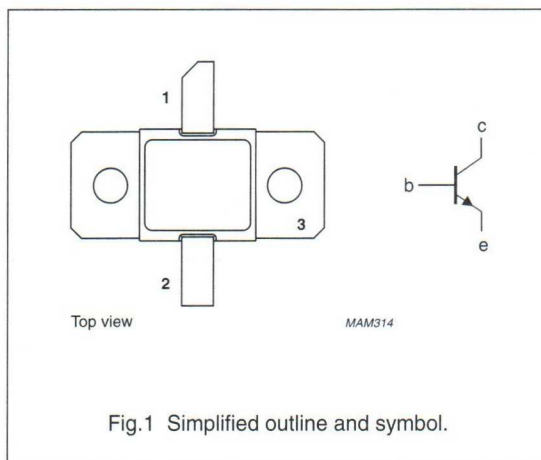

QUICK REFERENCE DATA

RF performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common base class-B wideband amplifier.

TYPE NUMBER	f (GHz)	V _{CC} (V)	P _L (W)	G _p (dB)	η_c (%)	Z _i ; Z _L (Ω)
PZ1418B30U	1.4 to 1.8	28	≥ 27	≥ 7.3	≥ 38	see Figs 6 and 7
PZ1721B25U	1.7 to 2.1	28	≥ 25	≥ 7	≥ 35	see Figs 11 and 12
PZ2024B20U	2 to 2.4	28	≥ 20	≥ 6	≥ 35	see Figs 16 and 17

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.


NPN microwave power transistors

PZ1418B30U; PZ1721B25U;
PZ2024B20U

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V _{CBO}	collector-base voltage	open emitter	–	40	V
V _{CEO}	collector-emitter voltage	open base	–	15	V
V _{CES}	collector-emitter voltage	R _{BE} = 0 Ω	–	35	V
V _{EBO}	emitter-base voltage	open collector	–	3	V
I _C	collector current (DC)		–	4	A
P _{tot}	total power dissipation	T _{mb} ≤ 75 °C	–	45	W
T _{stg}	storage temperature		–65	+200	°C
T _j	operating junction temperature		–	200	°C
T _{slid}	soldering temperature		–	235	°C

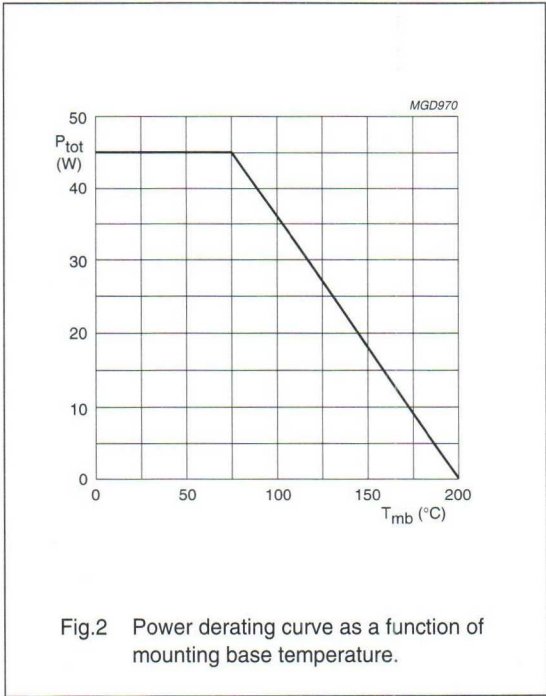

NPN microwave power transistors

PZ1418B30U; PZ1721B25U;
PZ2024B20U

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting-base	$T_j = 75\ ^\circ\text{C}$	2.2	K/W
$R_{th\ mb-h}$	thermal resistance from mounting-base to heatsink	$T_j = 75\ ^\circ\text{C}$; note 1	0.2	K/W

Note

1. See “Mounting recommendations in the General part of handbook SC15”.

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.


SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 40\ \text{V}; I_E = 0$	10	mA
		$V_{CB} = 30\ \text{V}; I_E = 0$	5	mA
I_{CES}	collector cut-off current	$V_{CE} = 35\ \text{V}; R_{BE} = 0$	50	mA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\ \text{V}; I_C = 0$	200	μA

APPLICATION INFORMATION

PZ1418B30U

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ in a common base class B wideband amplifier.


TYPE NUMBER	f (GHz)	V_{CC} (V)	P_L (W)	G_p (dB)	η_c (%)	$Z_i; Z_L$ (Ω)
PZ1418B30U	1.4 to 1.8	28	≥ 27 typ. 35	≥ 7.3 typ. 8.4	≥ 38 typ. 45	see Figs 6 and 7

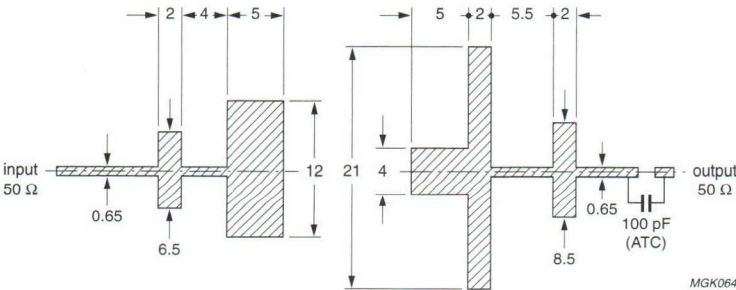


Dimensions in mm.
Substrate: Epsilam printed-circuit board.
Thickness: 0.635 mm.
Permittivity: $\epsilon_r = 10$.

Fig.3 Wideband test circuit board for 1.4 to 1.8 GHz operation (PZ1418B30U).

NPN microwave power transistors

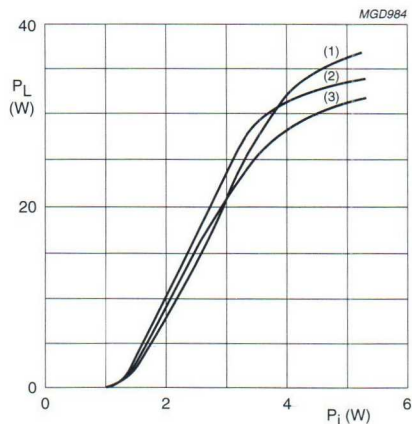PZ1418B30U; PZ1721B25U;
PZ2024B20UClass-B operation; $V_{CC} = 28$ V; $T_{mb} = 25$ °C.

- (1) 1.4 GHz.
- (2) 1.6 GHz.
- (3) 1.8 GHz.

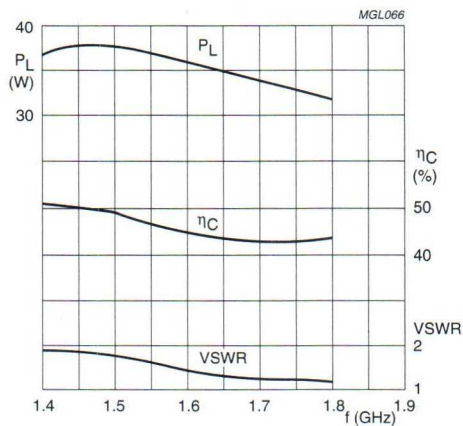Fig.4 Load power as a function of input power;
typical values for PZ1418B30U.Class-B operation; $V_{CC} = 28$ V; $T_{mb} = 25$ °C; $P_i = 5$ W.Fig.5 Load power, efficiency and VSWR as
functions of frequency; typical value
for PZ1418B30U.

NPN microwave power transistors

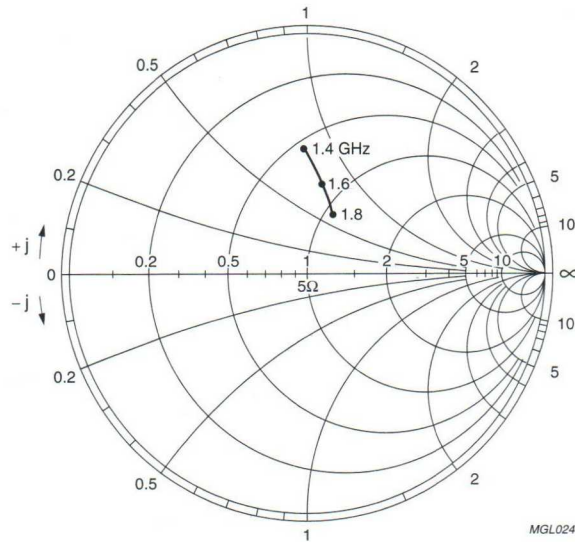
PZ1418B30U; PZ1721B25U;
PZ2024B20U $Z_0 = 5 \Omega$.

Fig.6 Input impedance as a function of frequency; typical values for PZ1418B30U.

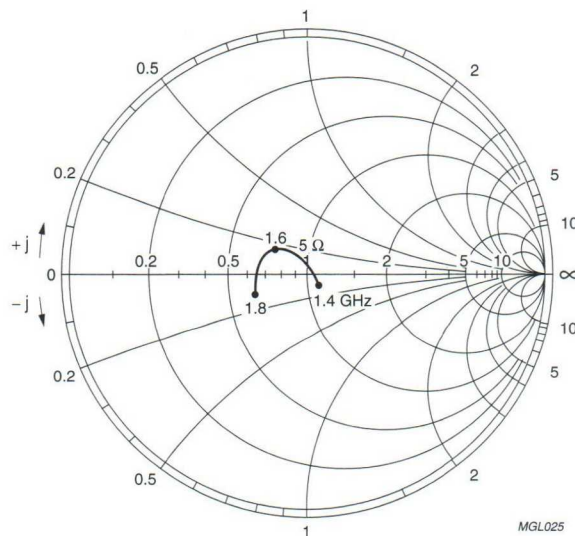
 $Z_0 = 5 \Omega$.

Fig.7 Optimum load impedance as a function of frequency; typical values for PZ1418B30U.


NPN microwave power transistors

PZ1418B30U; PZ1721B25U;
PZ2024B20U

PZ1721B25U


Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common base class B wideband amplifier.

TYPE NUMBER	f (GHz)	V _{CC} (V)	P _L (W)	G _p (dB)	η _C (%)	Z _i ; Z _L (Ω)
PZ1721B25U	1.7 to 2.1	28	≥25 typ. 30	≥7 typ. 7.8	≥35 typ. 44	see Figs 11 and 12

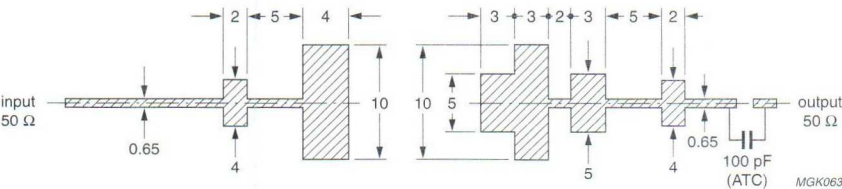


Dimensions in mm.
Substrate: Epsilam printed-circuit board.
Thickness: 0.635 mm.
Permittivity: ε_r = 10.

Fig.8 Wideband test circuit board for 1.7 to 2.1 GHz operation (PZ1721B25U).

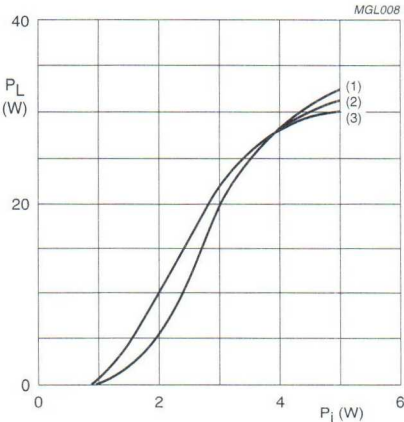

Class-B operation; V_{CC} = 28 V; T_{mb} = 25 °C.
(1) 1.7 GHz.
(2) 1.9 GHz.
(3) 2.1 GHz.

Fig.9 Load power as a function of input power; typical values for PZ1721B25U.

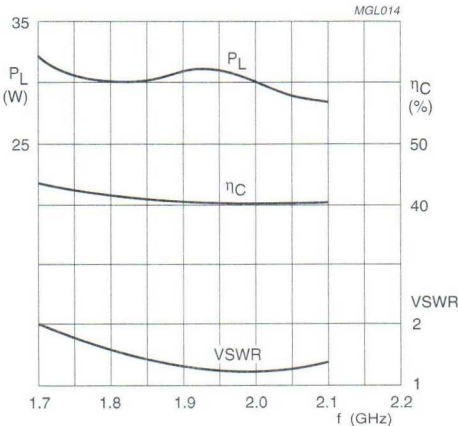

Class-B operation; V_{CC} = 28 V; T_{mb} = 25 °C; P_i = 5 W.

Fig.10 Load power, efficiency and VSWR as functions of frequency; typical values for PZ1721B25U.

NPN microwave power transistors

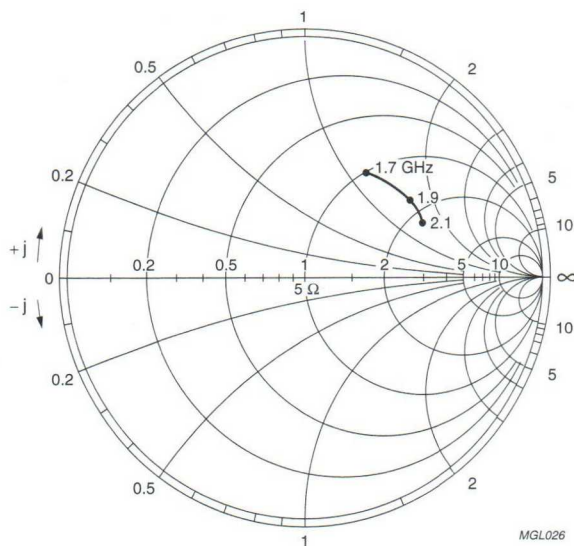
PZ1418B30U; PZ1721B25U;
PZ2024B20U $Z_0 = 5 \Omega$.

Fig.11 Input impedance as a function of frequency; typical values for PZ1721B25U.

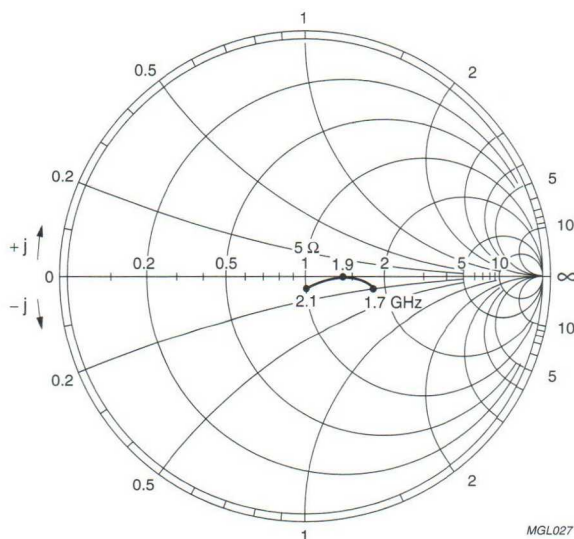
 $Z_0 = 5 \Omega$.

Fig.12 Optimum load impedance as a function of frequency; typical values for PZ1721B25U.


NPN microwave power transistors

PZ1418B30U; PZ1721B25U;
PZ2024B20U

PZ2024B20U


Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common base class B wideband amplifier.

TYPE NUMBER	f (GHz)	V _{CC} (V)	P _L (W)	G _p (dB)	η _c (%)	Z _i ; Z _L (Ω)
PZ2024B20U	2 to 2.4	28	≥20 typ. 26	≥6 typ. 7	≥35 typ. 42	see Figs 16 and 17

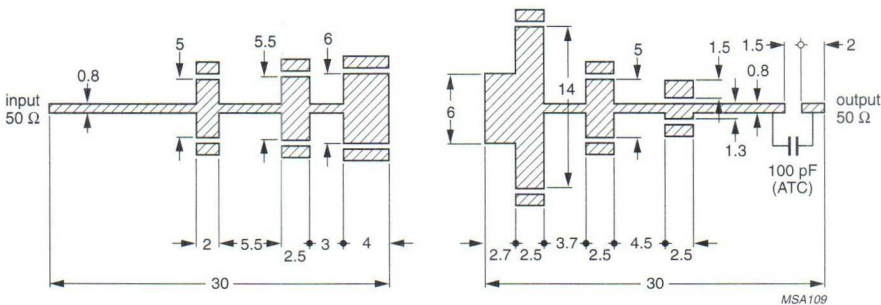


Dimensions in mm.
Substrate: Epsilam printed-circuit board.
Thickness: 0.635 mm.
Permittivity: $\epsilon_r = 10$.

Fig.13 Wideband test circuit board for 2 to 2.4 GHz operation (PZ2024B20U).

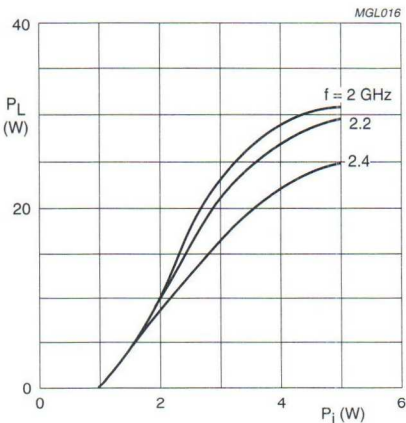

Class-B operation; $V_{CC} = 28\text{ V}$; $T_{mb} = 25\text{ }^{\circ}\text{C}$.

Fig.14 Load power as a function of input power; typical values for PZ2024B20U.

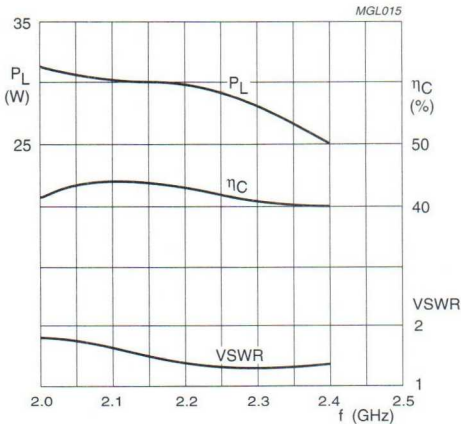

Class-B operation; $V_{CC} = 28\text{ V}$; $T_{mb} = 25\text{ }^{\circ}\text{C}$; $P_i = 5\text{ W}$.

Fig.15 Load power, efficiency and VSWR as functions of frequency; typical values for PZ2024B20U.

NPN microwave power transistors

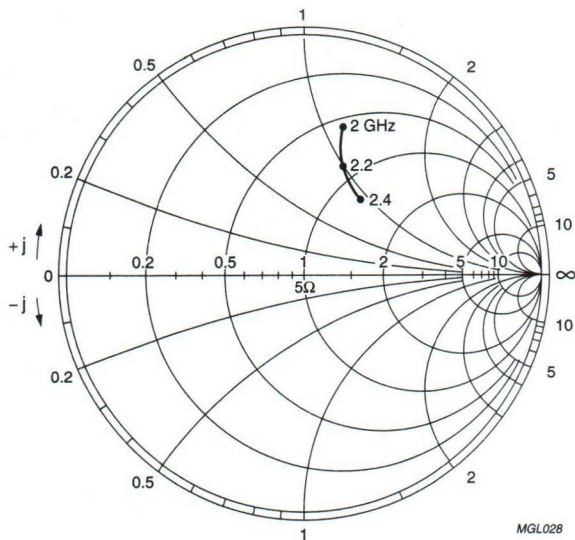
PZ1418B30U; PZ1721B25U;
PZ2024B20U $Z_0 = 5 \Omega$.

Fig.16 Input impedance as a function of frequency; typical values for PZ2024B20U.

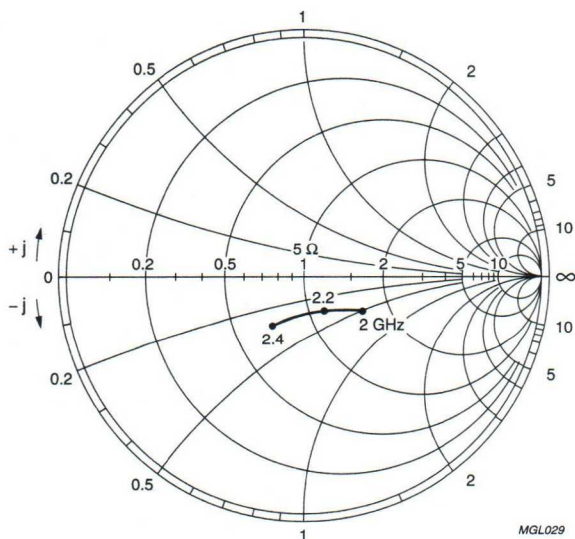
 $Z_0 = 5 \Omega$.

Fig.17 Optimum load impedance as a function of frequency; typical values for PZ2024B20U.

NPN microwave power transistor

PZB16035U

FEATURES

- Interdigitated structure provides high emitter efficiency
- Diffused emitter ballasting resistors providing excellent current sharing and withstanding a high VSWR
- Gold metallization realizes very stable characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance.
- Input matching cell improves input impedance and allows an easier design of wideband circuits.

APPLICATIONS


- Common base class-B power amplifiers under CW conditions in military and professional applications up to 1.6 GHz.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT443A metal ceramic flange package with the base connected to the flange.

PINNING - SOT443A

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

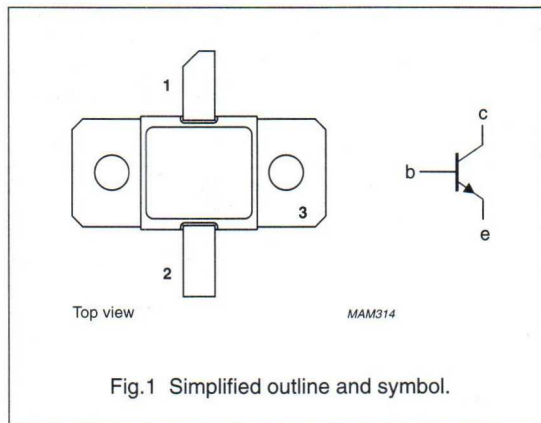

QUICK REFERENCE DATA

RF performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common base class-B selective amplifier.

MODE OF OPERATION	f (GHz)	V_{CC} (V)	P_L (W)	G_p (dB)	η_c (%)	$Z_i; Z_L$ (Ω)
Class-B (CW)	1.55	28	≥ 35	≥ 8	≥ 45	see Figs 5 and 6

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

NPN microwave power transistor

PZB16035U

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	–	40	V
V_{CEO}	collector-emitter voltage	open base	–	15	V
V_{CES}	collector-emitter voltage	$R_{BE} = 0\ \Omega$	–	35	V
V_{EBO}	emitter-base voltage	open collector	–	3	V
I_C	collector current (DC)		–	4	A
P_{tot}	total power dissipation	$T_{mb} = 75\ ^\circ\text{C}$	–	45	W
T_{stg}	storage temperature		–65	+200	$^\circ\text{C}$
T_j	operating junction temperature		–	200	$^\circ\text{C}$
T_{sld}	soldering temperature	Up to 0.2 mm from the flange; $t < 10\ \text{s}$	–	235	$^\circ\text{C}$

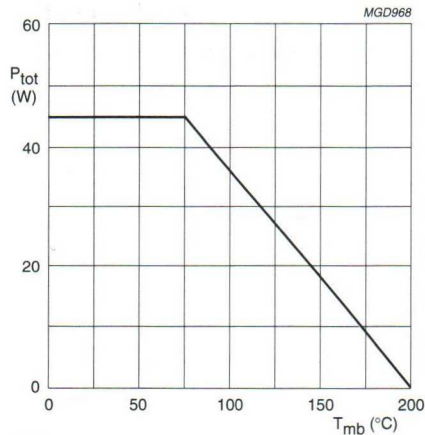


Fig.2 Power derating curve.

NPN microwave power transistor

PZB16035U

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting-base	$T_j = 75\ ^\circ\text{C}$	2.2	K/W
$R_{th\ mb-h}$	thermal resistance from mounting-base to heatsink	$T_j = 75\ ^\circ\text{C}$; note 1	0.2	K/W

Note

1. See “Mounting recommendations in the General part of handbook SC15”.

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	TYP.	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 40\ \text{V}; I_E = 0$	–	10	mA
		$V_{CB} = 30\ \text{V}; I_E = 0$	–	5	mA
I_{CES}	collector cut-off current	$V_{CER} = 35\ \text{V}; R_{BE} = 0$	–	50	mA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\ \text{V}; I_C = 0$	–	200	μA
C_{cb}	collector-base capacitance	$V_{CB} = 28\ \text{V}; I_E = I_C = 0$	17	–	pF


APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ in a common base class B selective amplifier; note 1.

MODE OF OPERATION	f (GHz)	V_{CC} (V)	P_L (W)	G_p (dB)	η_c (%)	$Z_i; Z_L$ (Ω)
Class B (CW)	1.55	28	>35; typ. 38	>8; typ. 9.8	>45; typ. 50	see Figs 5 and 6

Note

1. Amplifier consists of pre-matching test-circuit with complementary input and output slug tuners.

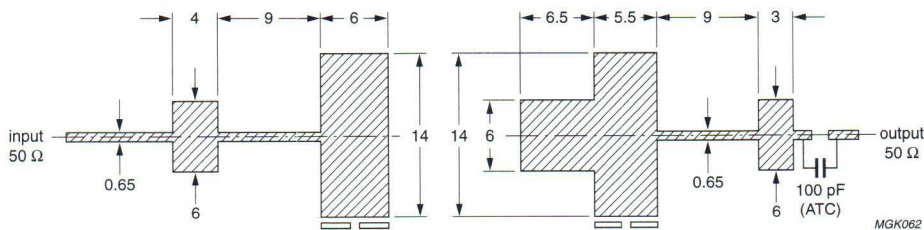


Dimensions in mm.
Substrate: Epsilam printed-circuit board.
Thickness: 0.65 mm.
Permittivity: $\epsilon_r = 10$.

Fig.3 Prematching test circuit boards for CW, class B operation at 1.55 GHz.


NPN microwave power transistor

PZB16035U

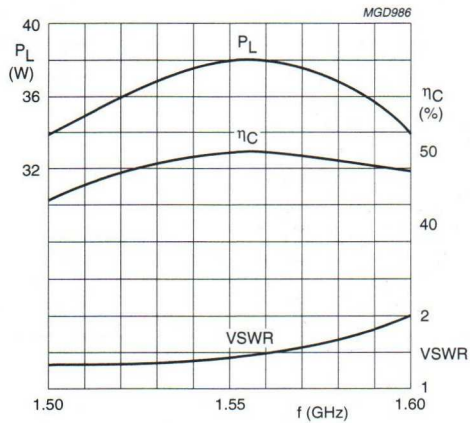

$V_{CC} = 28 \text{ V}$; $T_{mb} = 25 \text{ }^\circ\text{C}$.

Fig.4 Load power, efficiency and VSWR as functions of frequency.

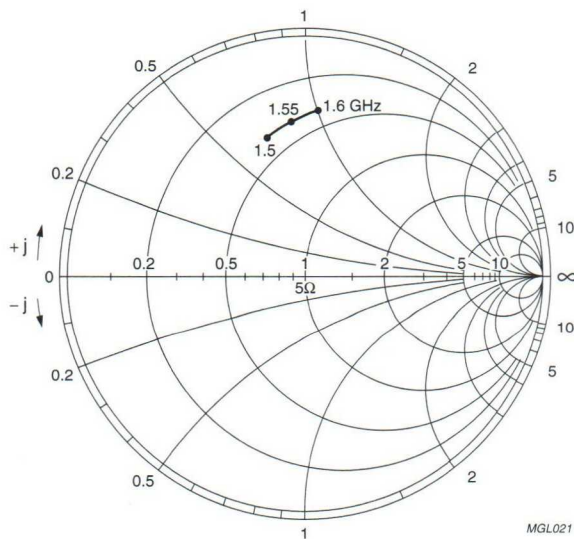

$P_L = 38 \text{ W}$; $Z_0 = 5 \Omega$.

Fig.5 Input impedance as a function of frequency; typical values.

NPN microwave power transistor

PZB16035U

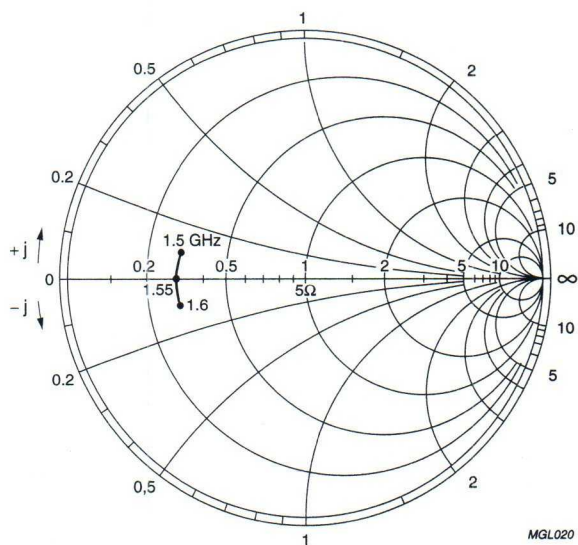
 $P_L = 38 \text{ W}; Z_0 = 5 \Omega.$

Fig.6 Optimum load impedance as a function of frequency; typical values.

NPN microwave power transistors

RX1214B80W; RX1214B130Y

FEATURES

- Suitable for short and medium pulse applications up to 1 ms pulse width, 10% duty factor
- Diffused emitter ballasting resistors improve ruggedness
- Interdigitated emitter-base structure provides high emitter efficiency
- Gold metallization with barrier realizes very stable characteristics and excellent lifetime
- Multicell geometry improves power sharing and reduces thermal resistance
- Internal input and output prematching networks allow an easier design of circuits.

APPLICATIONS

Common-base class C broadband pulsed power amplifiers for radar applications in the 1.2 to 1.4 GHz band. Also suitable for long pulse, heavy duty operation within this band.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT439A metal ceramic flange package, with base connected to flange.


QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common-base class C narrowband amplifier.

MODE OF OPERATION	CONDITIONS	f (GHz)	V _{CC} (V)	P _L (W)	G _p (dB)	η _c (%)
Class C RX1214B80W	t _p = 500 μs; δ = 10%	1.2 to 1.4	40	≥80	≥7	≥35
Class C RX1214B130Y	t _p = 150 μs; δ = 5%	1.2 to 1.4	50	≥130	≥7	≥35

PINNING - SOT439A

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

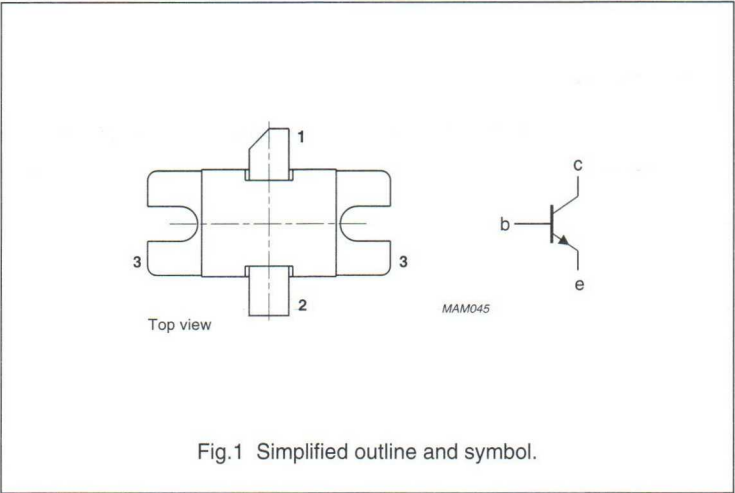

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

NPN microwave power transistors

RX1214B80W; RX1214B130Y


LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V _{CBO}	collector-base voltage	open emitter	–	65	V
V _{CEO}	collector-emitter voltage	open base	–	15	V
V _{CES}	collector-emitter voltage	R _{BE} = 0 Ω	–	60	V
V _{EBO}	emitter-base voltage	open collector	–	3	V
I _C	collector current (DC)	t _p ≤ 150 μs; δ ≤ 5%	–	9	A
P _{tot}	total power dissipation	T _{mb} < 75 °C; t _p ≤ 150 μs; δ ≤ 5%	–	280	W
T _{stg}	storage temperature		–65	+200	°C
T _j	operating junction temperature		–	200	°C
T _{sld}	soldering temperature	t ≤ 10 s; note 1	–	235	°C

Note

1. Up to 0.2 mm from ceramic.

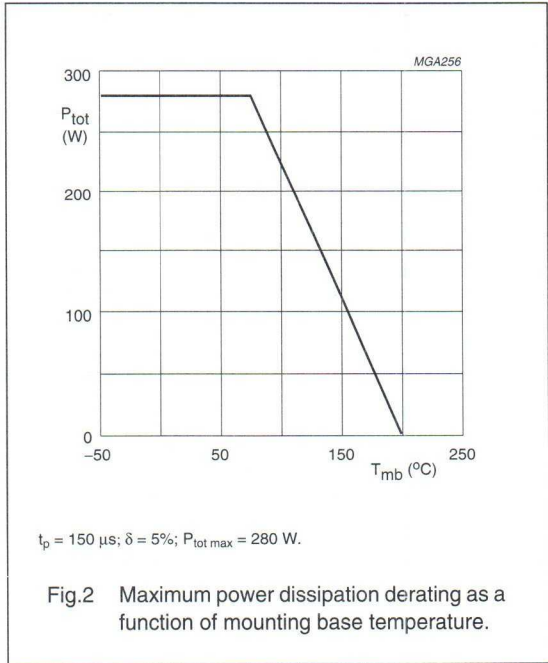

NPN microwave power transistors

RX1214B80W; RX1214B130Y

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	$T_j = 120\ ^\circ\text{C}$	1.75	K/W
$R_{th\ mb-h}$	thermal resistance from mounting base to heatsink	note 1	0.2	K/W
$Z_{th\ j-h}$	thermal impedance from junction to heatsink	$t_p = 150\ \mu\text{s}$; $\delta = 5\%$; notes 1 and 2	0.4	K/W

Notes

1. See "Mounting recommendations in the General part of handbook SC15".
2. Equivalent thermal impedance under pulsed microwave operating conditions.

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
I_{CBO}	collector cut-off current	$I_E = 0$; $V_{CB} = 50\ \text{V}$	—	6	mA
I_{EBO}	emitter cut-off current	$I_C = 0$; $V_{EB} = 1.5\ \text{V}$	—	0.6	mA
$V_{(BR)CES}$	collector-emitter breakdown voltage	$I_C = 60\ \text{mA}$; $V_{BE} = 0$	60	—	V

APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ in a common-base test circuit as shown in Fig.3.



MODE OF OPERATION	CONDITIONS	f (GHz)	V_{CC} (V)	P_L (W)	G_p (dB)	η_c (%)
Class C	$t_p = 150\ \mu\text{s}$; $\delta = 5\%$	1.2 to 1.4	50	≥ 130 ; typ. 140	≥ 7 ; typ. 7.5	≥ 35 ; typ. 39
	$t_p = 500\ \mu\text{s}$; $\delta = 10\%$	1.2 to 1.4	40	typ. 80	typ. 8.5	typ. 40

List of components (see Fig.3)

COMPONENT	DESCRIPTION	VALUE	DIMENSIONS	CATALOGUE NO.
L1	0.5 mm copper wire		total length = 15 mm	
C1	trimmer capacitor	0.6 – 5 pF		Tekelec, ref AT3-7271SL
C2	chip capacitor			
C3	tantalum capacitor	10 μF , 50 V		
C4	feedthrough bypass capacitor			Erie, ref.1250-003

NPN microwave power transistors

RX1214B80W; RX1214B130Y

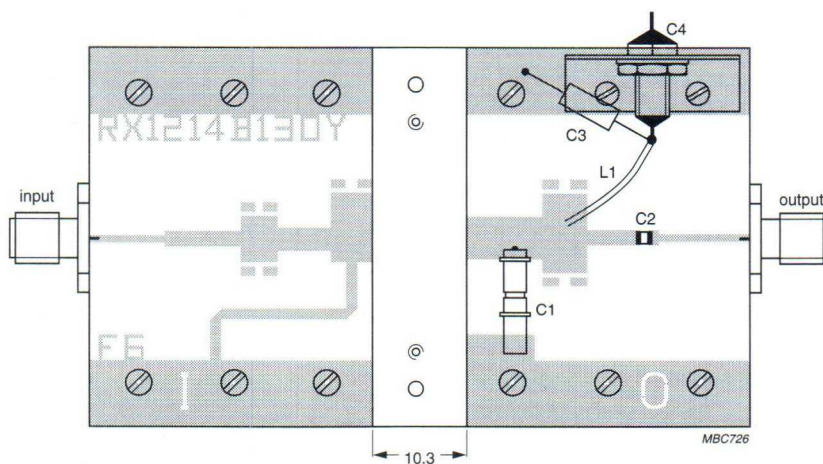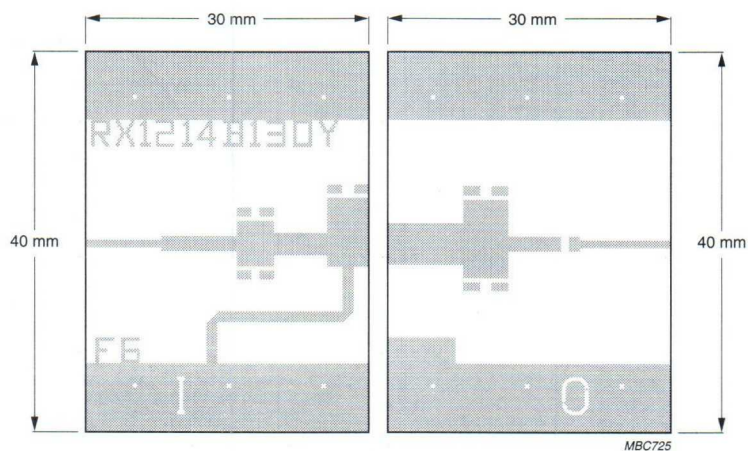


Substrate: Epsilam 10.
 Thickness: 0.635 mm.
 Permittivity: $\epsilon_r = 10$.

Fig.3 Broadband test circuit.

NPN microwave power transistors

RX1214B80W; RX1214B130Y

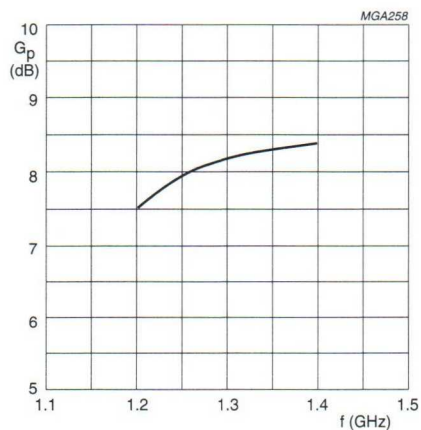


Class C pulse operation; $t_p = 500 \mu s$; $\delta = 5\%$.

$V_{CC} = 50 V$; $P_O = 130 W$.

Broadband test circuit as shown in Fig.3.

Fig.4 Power gain as a function of frequency.

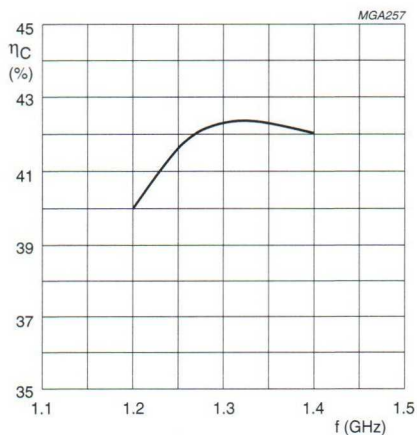

Class C pulse operation; $t_p = 500 \mu s$; $\delta = 5\%$.


$V_{CC} = 50 V$; $P_O = 130 W$.

Broadband test circuit as shown in Fig.3.

Fig.5 Collector efficiency as a function of frequency.


NPN microwave power transistors

RX1214B80W; RX1214B130Y

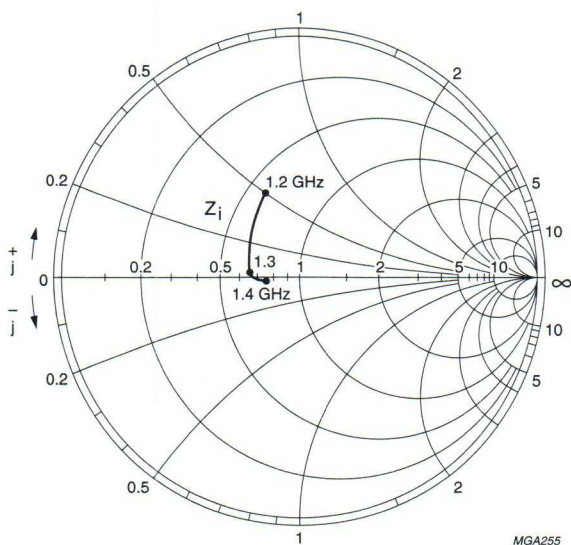

$V_{CC} = 50 \text{ V}$; $Z_O = 10 \Omega$; $P_{OUT} = 130 \text{ W}$.

Fig.6 Input impedance as a function of frequency, associated with optimum load impedance.

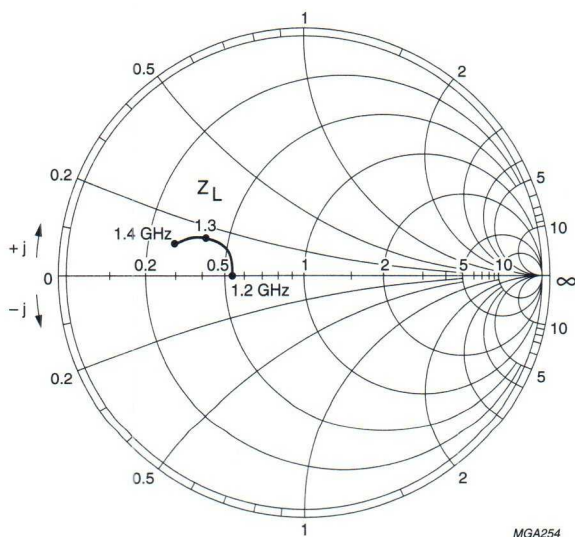

$V_{CC} = 50 \text{ V}$; $Z_O = 10 \Omega$; $P_{OUT} = 130 \text{ W}$.

Fig.7 Load impedance as a function of frequency, associated with optimum input impedance.

Microwave power transistor

RX1214B170W

FEATURES

- Suitable for short and medium pulse applications up to 1 ms pulse width, 10% duty factor
- Diffused emitter ballasting resistors improve ruggedness
- Interdigitated emitter-base structure provides high emitter efficiency
- Gold metallization with barrier realizes very stable characteristics and excellent lifetime
- Multicell geometry improves power sharing and reduces thermal resistance
- Internal input and output prematching networks allow an easier design of circuits.

APPLICATIONS

Intended for use in common-base class C broadband pulsed power amplifiers for radar applications in the 1.2 to 1.4 GHz band. Also suitable for long pulse, heavy duty operation within this band.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT439A metal ceramic flange package, with base connected to flange.

QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common base class C narrowband amplifier.

MODE OF OPERATION	CONDITIONS	f (GHz)	V _{CC} (V)	P _L (W)	G _p (dB)	η_c (%)
Class C	$t_p = 500\text{ }\mu\text{s}$; $\delta = 10\%$	1.2 to 1.4	42	≥ 170	≥ 6.7	≥ 40

PINNING - SOT439A

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

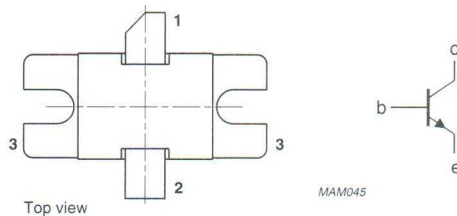


Fig.1 Simplified outline and symbol.

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

Microwave power transistor

RX1214B170W


LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	—	65	V
V_{CES}	collector-emitter voltage	$R_{BE} = 0$	—	65	V
V_{CEO}	collector-emitter voltage	open base	—	15	V
V_{EBO}	emitter-base voltage	open collector	—	3	V
I_C	collector current	$t_p \leq 150 \mu s; \delta \leq 5\%$	—	15	A
P_{tot}	total power dissipation	$T_{mb} \leq 75\text{ }^{\circ}C; t_p \leq 150 \mu s; \delta \leq 5\%$	—	350	W
T_{stg}	storage temperature		−65	+200	$^{\circ}C$
T_j	junction temperature		—	200	$^{\circ}C$
T_{sld}	soldering temperature	$t \leq 10\text{ s; note 1}$	—	235	$^{\circ}C$

Note

1. Up to 0.2 mm from ceramic.

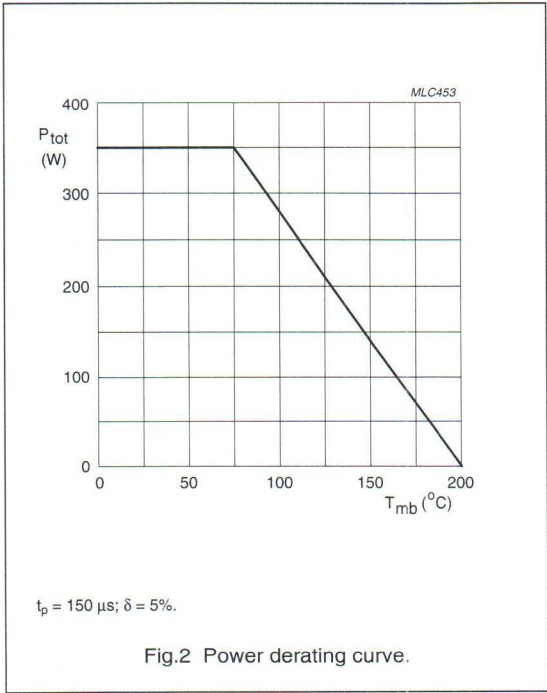

Microwave power transistor

RX1214B170W

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	$T_j = 120\ ^\circ\text{C}$	1.9	K/W
$R_{th\ mb-h}$	thermal resistance from mounting base to heatsink	note 1	0.2	K/W
Z_{th}	thermal impedance from junction to heatsink	$t_p = 500\ \mu\text{s}$; $\delta = 10\%$; notes 1 and 2	0.28	K/W

Notes

1. See "Mounting recommendations in the General part of handbook SC15".
2. Equivalent thermal impedance under pulsed microwave operating conditions.

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
I_{CBO}	collector cut-off current	$I_E = 0$; $V_{CB} = 50\ \text{V}$	–	20	mA
I_{EBO}	emitter cut-off current	$I_C = 0$; $V_{EB} = 1.5\ \text{V}$	–	2	mA
$V_{(BR)CES}$	collector-emitter breakdown voltage	$I_C = 60\ \text{mA}$; $V_{BE} = 0$	65	–	V

APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ in a common-base test circuit as shown in Fig.3; note 1.


MODE OF OPERATION	CONDITIONS	f (GHz)	V_{CC} (V)	P_L (W)	G_p (dB)	η_c (%)
Class C	$t_p = 500\ \mu\text{s}$; $\delta = 10\%$	1.2 to 1.4	42	170	≥ 6.7 typ. 7.2	≥ 40 typ. 45

Note

1. Equivalent thermal impedance under pulsed microwave operating conditions.

Microwave power transistor

RX1214B170W

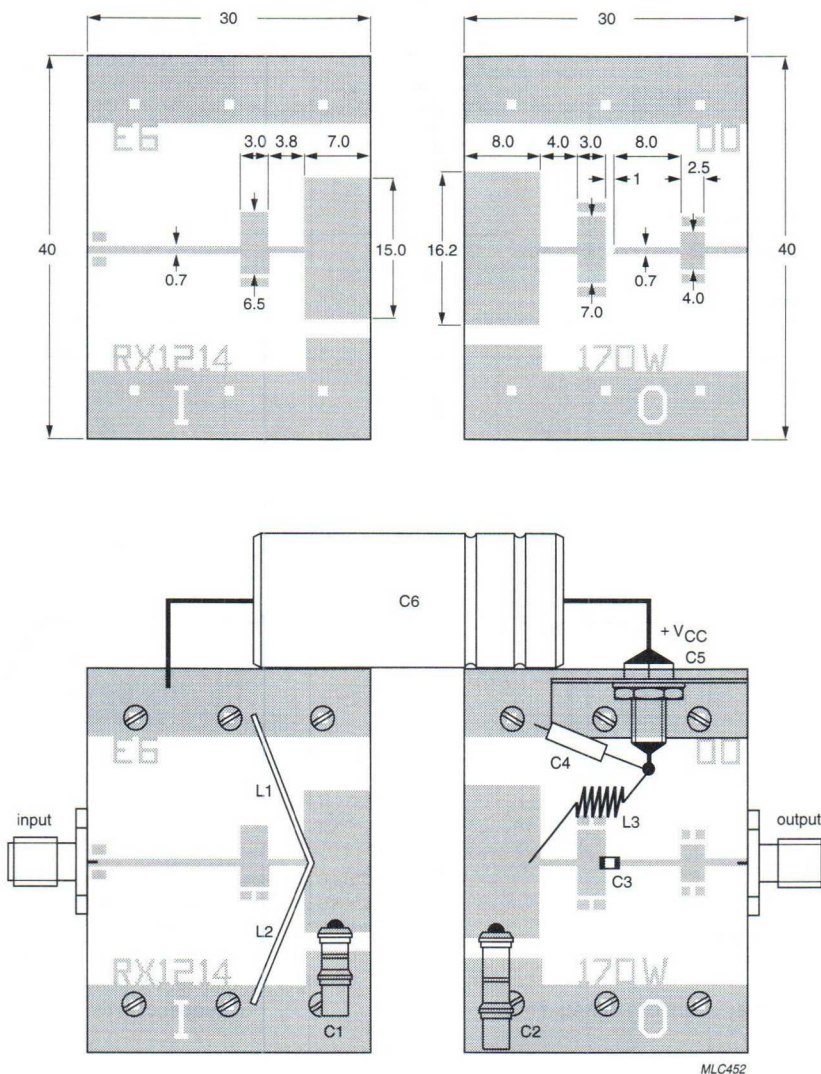

Dimensions in mm.
 Substrate: Epsilam 10.
 Thickness: 0.635 mm.
 Permittivity: $\epsilon_r = 10$.



Fig.3 Broadband test circuit.

Microwave power transistor

RX1214B170W

List of components (see Fig.3)

COMPONENT	DESCRIPTION	VALUE	ORDERING INFORMATION
C1	variable gigatrim capacitor	0.6 to 5 pF	Tekelec AT3-7271SL
C2	variable gigatrim capacitor	0.8 to 8 pF	Tekelec 729-1
C3	capacitor	100 pF	ATC 100A101kp50x
C4	tantalum capacitor	10 μ F; 50 V	
C5	feedthrough bypass capacitor		Erie 1250-003
L1, L2	0.65 mm copper wire; total length = 24 mm; height of loop = 10 mm		
L3	4 turns 0.65 mm copper wire; total length = 4 mm; internal diameter = 3 mm		

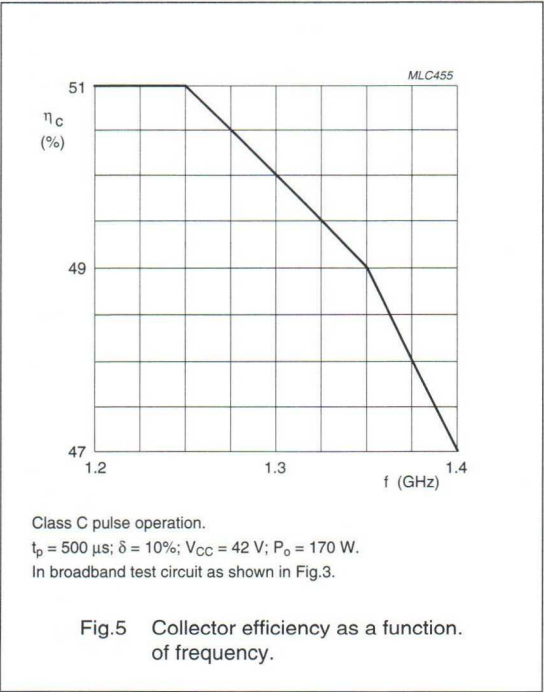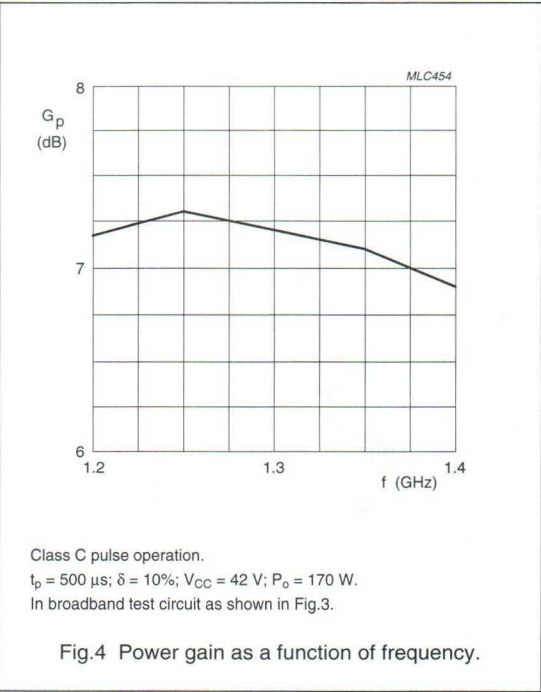

NPN microwave power transistor

RX1214B300Y

FEATURES

- Interdigitated structure provides high emitter efficiency
- Diffused emitter ballasting resistors providing excellent current sharing and withstanding a high VSWR
- Gold metallization realizes very stable characteristics and excellent lifetime
- Multicell geometry improves power sharing and reduces thermal resistance
- Internal input and output matching networks for an easy circuit design.

APPLICATIONS


- Common base class-C wideband amplifiers operating under pulsed conditions, recommended for L-band radar applications.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT439A metal ceramic flange package with the base connected to the flange.

PINNING - SOT439A

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

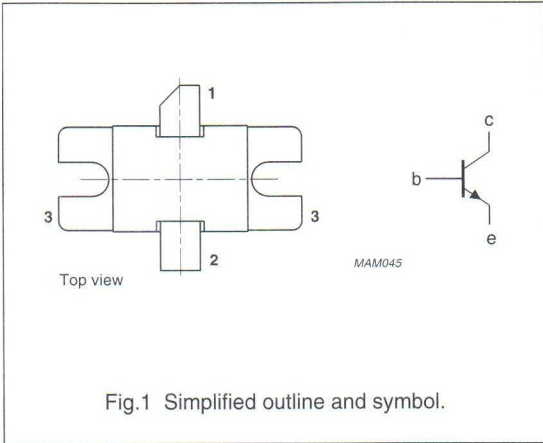

QUICK REFERENCE DATA

Microwave performance at $T_{mb} \leq 25\text{ }^{\circ}\text{C}$ in a common base class-C wideband amplifier.

MODE OF OPERATION	f (GHz)	V _{CC} (V)	P _L (W)	G _P (dB)	η_C (%)	Z _i ; Z _L (Ω)
Class-C $t_p = 150\text{ }\mu\text{s}$; $\delta = 5\text{ }\%$	1.2 to 1.4	50	≥ 250	≥ 7	≥ 35	see Fig 6

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.


NPN microwave power transistor

RX1214B300Y

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V _{CBO}	collector-base voltage	open emitter	–	65	V
V _{CES}	collector-emitter voltage	R _{BE} = 0 Ω	–	60	V
V _{EBO}	emitter-base voltage	open collector	–	3	V
I _C	collector current (DC)	t _p ≤ 150 μs; δ = 5 %	–	21	A
P _{tot}	total power dissipation	t _p ≤ 150 μs; δ = 5 %; T _{mb} = 75 °C	–	570	W
T _{stg}	storage temperature		–65	+200	°C
T _j	operating junction temperature		–	200	°C
T _{slid}	soldering temperature	at 0.2 mm from case; t ≤ 10 s	–	235	°C

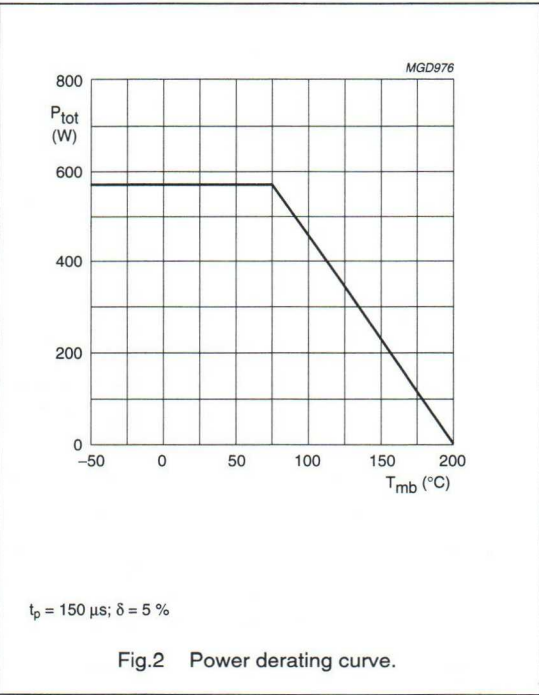

NPN microwave power transistor

RX1214B300Y

THERMAL CHARACTERISTICS

 $T_j = 100\text{ }^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting-base		0.8	K/W
$R_{th\ mb-h}$	thermal resistance from mounting base to heatsink	note 1	0.2	K/W
$Z_{th\ j-h}$	thermal impedance from junction to heatsink	$t_p = 150\text{ }\mu\text{s}$; $\delta = 5\%$; notes 1 and 2	0.22	K/W

Notes

1. See "Mounting recommendations in the General part of handbook SC15".
2. Equivalent thermal impedance under nominal pulse microwave operating conditions.

CHARACTERISTICS

 $T_{mb} = 25\text{ }^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
$V_{(BR)CBO}$	collector-base breakdown voltage	$I_C = 140\text{ mA}$; $I_E = 0$	65	—	V
$V_{(BR)CES}$	collector-emitter breakdown voltage	$I_C = 140\text{ mA}$; $R_{BE} = 0\text{ }\Omega$	60	—	V
$V_{(BR)EBO}$	emitter-base breakdown voltage	$I_C = 0$; $I_E = 20\text{ mA}$	3	—	V
I_{CBO}	collector cut-off current	$V_{CB} = 50\text{ V}$; $I_E = 0$	—	14	mA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\text{ V}$; $I_C = 0$	—	1.4	mA


APPLICATION INFORMATION

Microwave performance at $T_{mb} \leq 25\text{ }^{\circ}\text{C}$ in a common base class C wideband amplifier.

MODE OF OPERATION	f (GHz)	V_{CC} (V)	P_L (W)	G_P (dB)	η_c (%)	Z_i ; Z_L (Ω)
Pulsed $t_p = 150\text{ }\mu\text{s}$; $\delta = 5\%$	1.2 to 1.4	50	≥ 250 typ. 320	≥ 7 typ. 8	≥ 35 typ. 40	see Fig 6
$t_p = 300\text{ }\mu\text{s}$; $\delta = 10\%$	1.2 to 1.4	50	typ. 300	typ. 7.5	typ. 35	see Fig 6

NPN microwave power transistor

RX1214B300Y

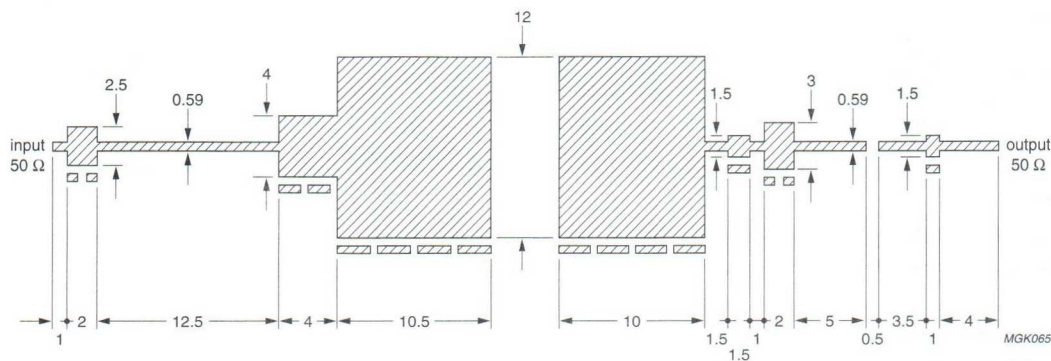

Dimensions in mm.

Substrate: Epsilam printed-circuit board.

Thickness: 0.635 mm.

Permittivity: $\epsilon_r = 10$.

Fig.3 Wideband test circuit board for 1.2 to 1.4 GHz application.

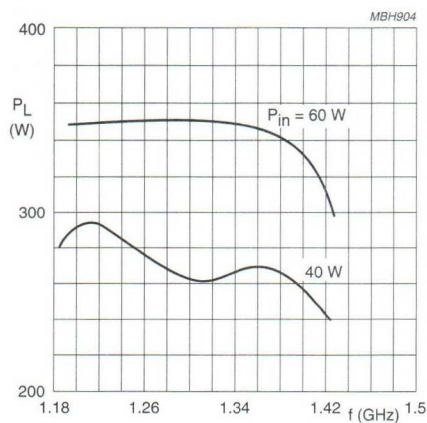
 $t_p = 150 \mu\text{s}$; $\delta = 5\%$.

Fig.4 Load power as a function of frequency; typical values.


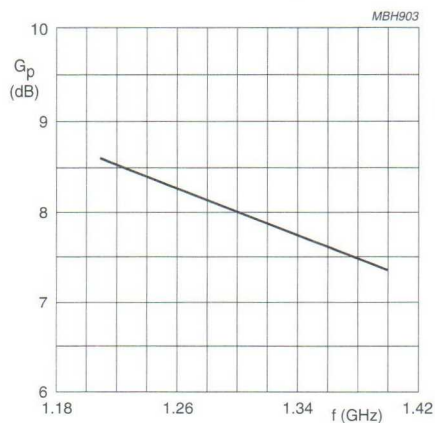
 $t_p = 150 \mu\text{s}$; $\delta = 5\%$.

Fig.5 Power gain as a function of frequency; typical values.

NPN microwave power transistor

RX1214B300Y

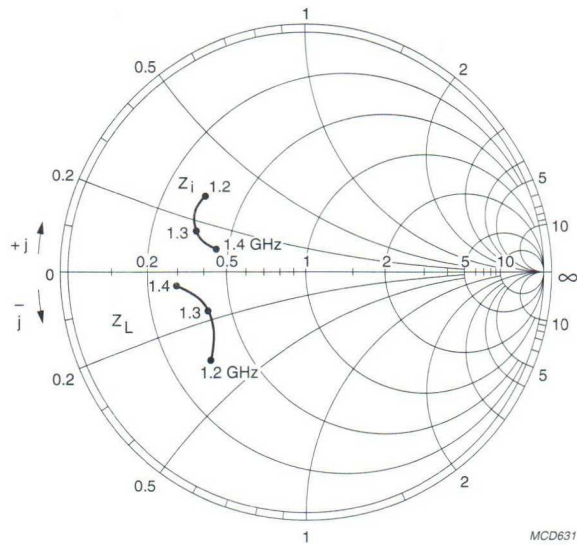

$Z_0 = 5 \Omega$; $V_{CC} = 50 \text{ V}$; $P_L = 250 \text{ W}$; $T_{mb} = 25^\circ\text{C}$; $t_p = 150 \mu\text{s}$; $\delta = 5\%$; class C operation.

Fig.6 Input and optimum load impedances as functions of frequency; typical values.

NPN microwave power transistor

RX1214B350Y

FEATURES

- Suitable for short and medium pulse applications up to 1 ms/10%
- Internal input prematching networks allow an easier design of circuits
- Diffused emitter ballasting resistors improve ruggedness
- Interdigitated emitter-base structure provides high emitter efficiency
- Gold metallization with barrier realizes very stable characteristics and excellent lifetime
- Multicell geometry improves power sharing and reduces thermal resistance.

APPLICATIONS

Common base, class C, broadband, pulsed power amplifiers for L-Band radar applications in the 1.2 to 1.4 GHz band. Also suitable for medium pulse, heavy duty operation within this band.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT439A metal ceramic flange package with base connected to flange.

QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common base class C broadband amplifier.

MODE OF OPERATION	CONDITIONS	f (GHz)	V _{CC} (V)	P _L (W)	G _p (dB)	η _C (%)
Class C	t _p = 130 μs; δ = 6%	1.2 to 1.4	50	280	≥7	≥40

PINNING - SOT439A

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

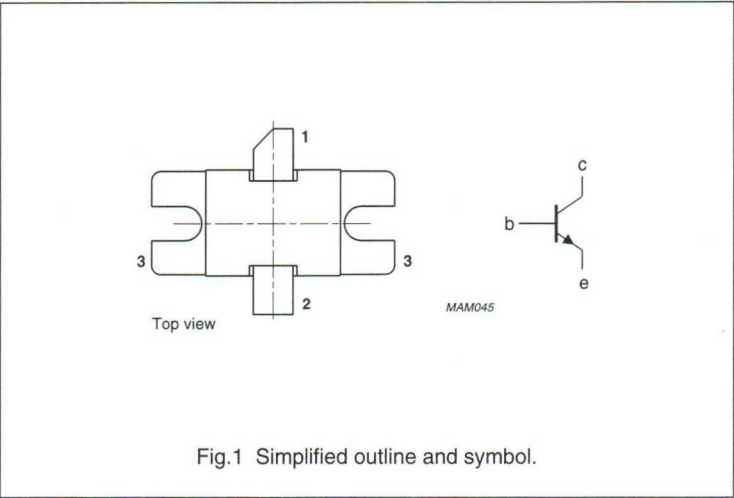


Fig.1 Simplified outline and symbol.

WARNING
Product and environmental safety - toxic materials
This product contains beryllium oxide. The product is entirely safe provided that the BeO disc is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.

NPN microwave power transistor

RX1214B350Y


LIMITING VALUES

In accordance with the Absolute Maximum System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	—	65	V
V_{CEO}	collector-emitter voltage	open base	—	20	V
V_{CES}	collector-emitter voltage	$R_{BE} = 0\ \Omega$	—	65	V
V_{EBO}	emitter-base voltage	open collector	—	3	V
I_C	collector current (DC)	$t_p \leq 130\ \mu s; \delta \leq 6\%$	—	25	A
P_{tot}	total power dissipation	$T_{mb} < 75\ ^\circ C;$ $t_p \leq 30\ \mu s; \delta \leq 1\%$	—	750	W
T_{stg}	storage temperature		−65	200	$^\circ C$
T_j	operating junction temperature		—	200	$^\circ C$
T_{sld}	soldering temperature	$t \leq 10\ s;$ note 1	—	235	$^\circ C$

Note

1. Up to 0.2 mm from ceramic.

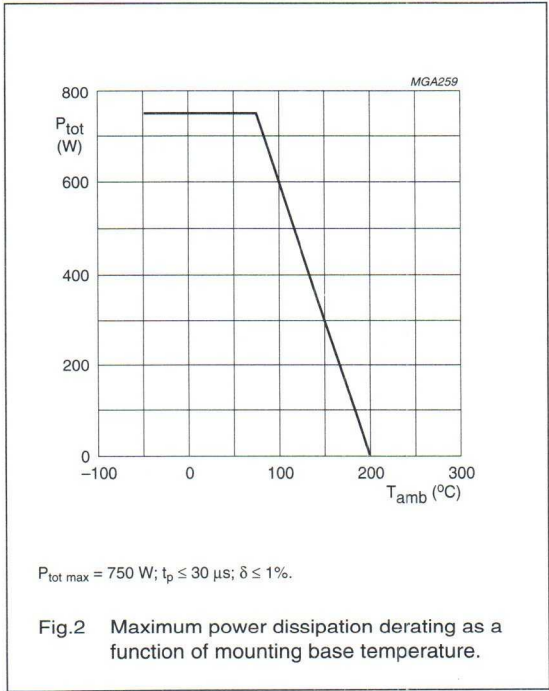

NPN microwave power transistor

RX1214B350Y

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting base	$T_j = 120\ ^\circ\text{C}$	1.2	K/W
$R_{th\ mb-h}$	thermal resistance from mounting base to heatsink	note 1	0.2	K/W
$Z_{th\ j-h}$	thermal impedance from junction to heatsink	$t_p = 130\ \mu\text{s}$; $\delta = 6\%$; $T_j = 110\ ^\circ\text{C}$; notes 1 and 2	0.17	K/W

Notes

1. See "Mounting recommendations in the General part of handbook SC15".
2. Equivalent thermal impedance under pulsed microwave operating conditions.

CHARACTERISTICS

$T_{mb} = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
I_{CBO}	collector cut-off current	$V_{CB} = 50\ \text{V}$; $I_E = 0$	30	mA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\ \text{V}$; $I_C = 0$	3	mA

APPLICATION INFORMATION

Microwave performance up to $T_{mb} = 25\ ^\circ\text{C}$ in a common base test circuit as shown in Fig.3.

MODE OF OPERATION	CONDITIONS	f (GHz)	V_{CC} (V) note 1	P_L (W)	G_p (dB)	η_c (%)
Class C	$t_p = 130\ \mu\text{s}$; $\delta = 6\%$; note 2	1.2 to 1.4	50	280	≥ 7 ; typ. 8	≥ 40 ; typ. 44

Notes

1. V_{CC} during pulse.
2. Operating conditions and performances for other pulse formats can be made available on request.

RX1214B350Y



Fig.3 Broadband test circuit.


NPN microwave power transistor

RX1214B350Y

List of components (see Fig.3)


COMPONENT	DESCRIPTION	VALUE	DIMENSIONS	CATALOGUE NO.
L1, L2, L3	3 turns 0.65 mm diameter copper wire		int dia. = 4 mm; length of turn = 3 mm	
C1	capacitor	100 pF		ATC, ref. 100B101KP50X
C2	tantalum capacitor	10 μ F, 50 V		
C3	electrolytic capacitor	470 μ F, 63 V		
C4	feedthrough bypass capacitor			Erie, ref.1250-003
C5	variable gigatrim capacitor	0.8 - 8 pF		Tekelec, ref.729.1
C6	capacitor	4.7 nF		
R1	resistor	4.7 Ω		

The test jig consists of two circuits (input and output), each being 30 mm x 40 mm in size. The two circuits are mounted on a 10 mm thick hard aluminium alloy block. A recess should be machined in the aluminium block in which the transistor can be mounted. The mounting surface must be lapped to a surface roughness of $R_a < 0.5 \mu\text{m}$ and the sum of the depth of the recess and the thickness of the circuits should not exceed the specified minimum dimension between mounting face and the leads of the transistor. Tolerances on this dimension may be absorbed by placing a gold plated metal shim under the leads, close to the body of the transistor.

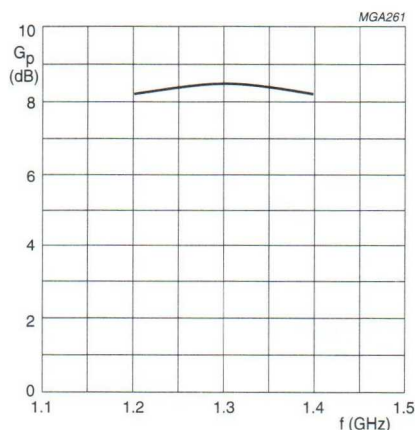

Class C pulse operation; $t_p = 130 \mu\text{s}$; $\delta = 6\%$.
 $V_{CC} = 50 \text{ V}$; $P_O = 280 \text{ W}$.
 Broadband test circuit as shown in Fig.3.

Fig.4 Power gain as a function of frequency.

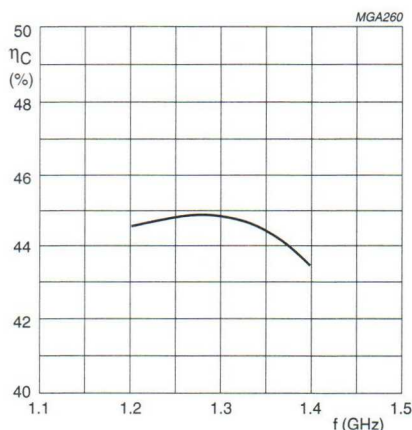


Class C pulse operation; $t_p = 130 \mu\text{s}$; $\delta = 6\%$.
 $V_{CC} = 50 \text{ V}$; $P_O = 280 \text{ W}$.
 Broadband test circuit as shown in Fig.3.

Fig.5 Collector efficiency as a function of frequency.


NPN microwave power transistor

RX1214B350Y

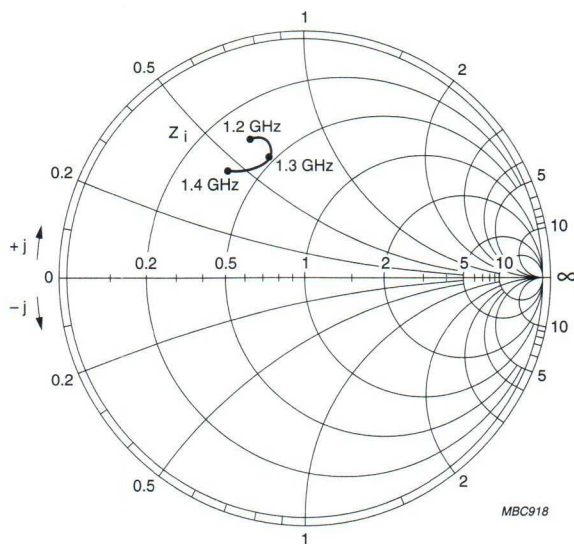

$V_{CC} = 50 \text{ V}$; $Z_O = 5 \Omega$; $P_O = 280 \text{ W}$.

Fig.6 Input impedance as a function of frequency, associated with optimum load impedance.

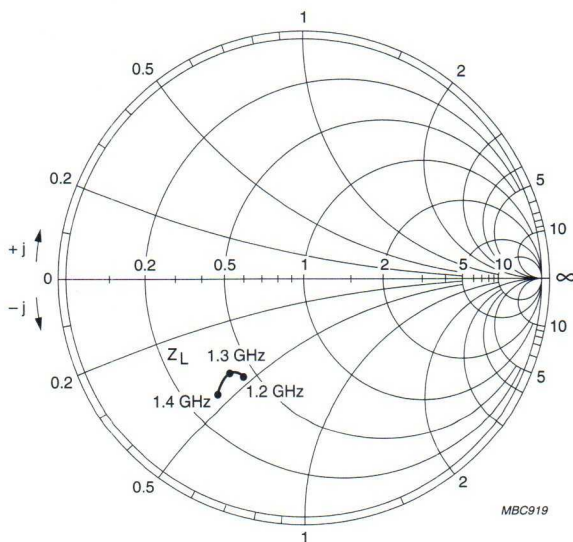

$V_{CC} = 50 \text{ V}$; $Z_O = 5 \Omega$; $P_O = 280 \text{ W}$.

Fig.7 Optimum load impedance as a function of frequency, associated with input impedance.

NPN microwave power transistor

RZ1214B35Y

FEATURES

- Interdigitated structure provides high emitter efficiency
- Diffused emitter ballasting resistor providing excellent current sharing and withstanding a high VSWR
- Gold metallization realizes very stable characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance
- Internal input matching ensures good stability and allows an easier design of wideband circuits.

APPLICATIONS


- Common base class-C wideband pulsed power amplifiers for L-band radar applications in the 1.2 to 1.4 GHz band.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT443A metal ceramic flange package with the base connected to the flange.

PINNING - SOT443A

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

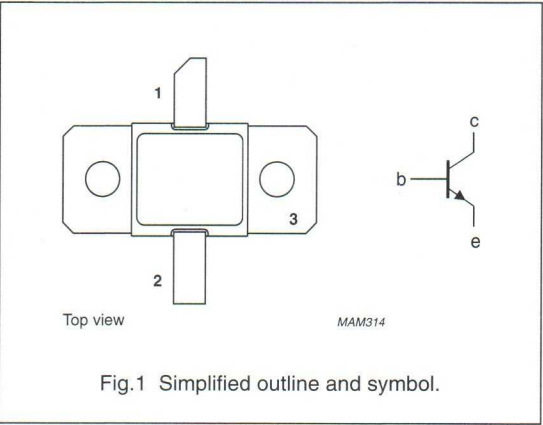

QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common base class-C wideband amplifier.

MODE OF OPERATION	f (GHz)	V _{CC} (V)	P _L (W)	G _p (dB)	η _C (%)	Z _i ; Z _L (Ω)
Class-C; t _p = 150 μs; δ = 5%	1.2 to 1.4	50	≥35	≥7	≥30	see Fig 4

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.


NPN microwave power transistor

RZ1214B35Y

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	–	65	V
V_{CEO}	collector-emitter voltage	open base	–	15	V
V_{CES}	collector-emitter voltage	$R_{BE} = 0\ \Omega$	–	60	V
V_{EBO}	emitter-base voltage	open collector	–	3	V
I_C	collector current (DC)	$t_p \leq 150\ \mu s; \delta \leq 5\% \leq$	–	3	A
P_{tot}	total power dissipation	$T_{mb} \leq 75\ ^\circ C;$ $t_p \leq 150\ \mu s; \delta \leq 5\%$	–	125	W
T_{stg}	storage temperature		–65	+200	$^\circ C$
T_j	operating junction temperature		–	200	$^\circ C$
T_{sld}	soldering temperature	at 0.2 mm from the case; $t \leq 10\ s$	–	235	$^\circ C$

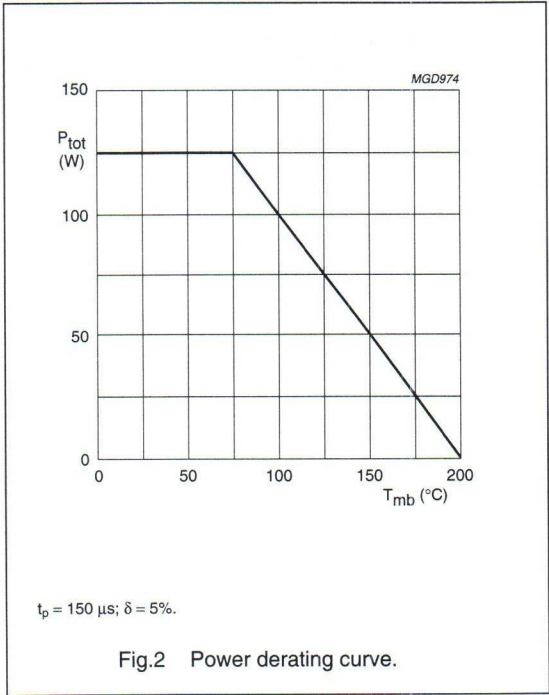

NPN microwave power transistor

RZ1214B35Y

THERMAL CHARACTERISTICS

 $T_j = 75\text{ }^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting-base		5	K/W
$R_{th\ mb-h}$	thermal resistance from mounting-base to heatsink	note 1	0.2	K/W
$Z_{th\ j-h}$	thermal resistance from junction to heatsink	$t_p = 100\text{ }\mu\text{s}$; $\delta = 10\%$; notes 1 and 2	1	K/W

Notes

- See "Mounting recommendations in the General part of handbook SC15".
- Equivalent thermal impedance under pulsed microwave operating conditions.

CHARACTERISTICS

 $T_j = 25\text{ }^{\circ}\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
$V_{(BR)CBO}$	collector-base breakdown voltage	$I_C = 20\text{ mA}$; $I_E = 0$	65	—	V
$V_{(BR)CES}$	collector-emitter breakdown voltage	$I_C = 20\text{ mA}$; $R_{BE} = 0$	60	—	V
$V_{(BR)EBO}$	emitter-base breakdown voltage	$I_C = 0$; $I_E = 3\text{ mA}$	3	—	V
I_{CBO}	collector cut-off current	$V_{CB} = 50\text{ V}$; $I_E = 0$	—	2	mA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\text{ V}$; $I_C = 0$	—	0.2	mA

APPLICATION INFORMATION

The transistors are 100% tested under the following conditions

MODE OF OPERATION	CONDITIONS	f (GHz)	V_{CC} (V)	P_L (W)	G_p (dB)	η_c (%)	Z_i ; Z_L (Ω)
Class-C	$t_p = 150\text{ }\mu\text{s}$; $\delta = 5\%$	1.2 to 1,4	50	typ.40; >35	typ.7.8; >7	typ.35; >35	see Fig 4
	$t_p = 300\text{ }\mu\text{s}$; $\delta = 10\%$	1.2 to 1,4	50	typ.40;	typ.7	typ.35	see Fig 4

NPN microwave power transistor

RZ1214B35Y


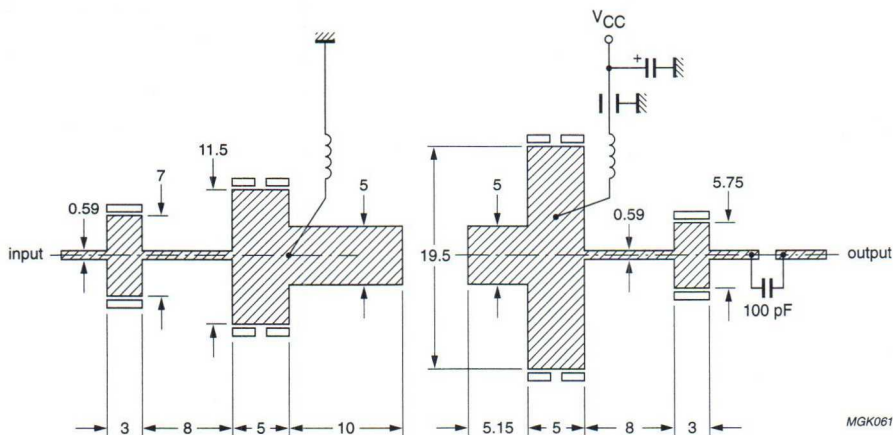


Fig.3 Wideband test circuit for class C operation at 1.2 to 1.4 GHz.

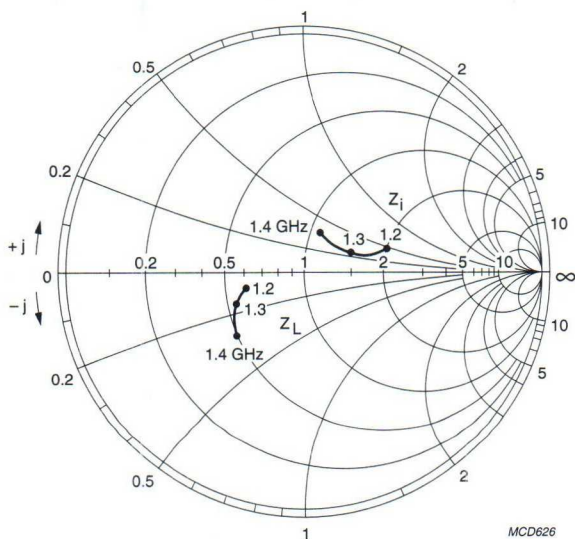

Class C operation; $V_{CE} = 50$ V; $P_L = 35$ W; $Z_0 = 5$ Ω ; $t_p = 150$ μ s; $\delta = 5\%$.

Fig.4 Input and optimum load impedances as functions of frequency; typical values.

NPN microwave power transistor

RZ1214B65Y

FEATURES

- Interdigitated structure provides high emitter efficiency
- Diffused emitter ballasting resistor providing excellent current sharing and withstanding a high VSWR
- Gold metallization realizes very stable characteristics and excellent lifetime
- Multicell geometry gives good balance of dissipated power and low thermal resistance
- Internal input and output matching ensures good stability and allows an easier design of wideband circuits.

APPLICATIONS


- Intended for use in common base class B wideband pulsed power amplifiers for L-band radar applications in the 1.2 to 1.4 GHz band.

DESCRIPTION

NPN silicon planar epitaxial microwave power transistor in a SOT443A metal ceramic flange package with the base connected to the flange.

PINNING - SOT443A

PIN	DESCRIPTION
1	collector
2	emitter
3	base connected to flange

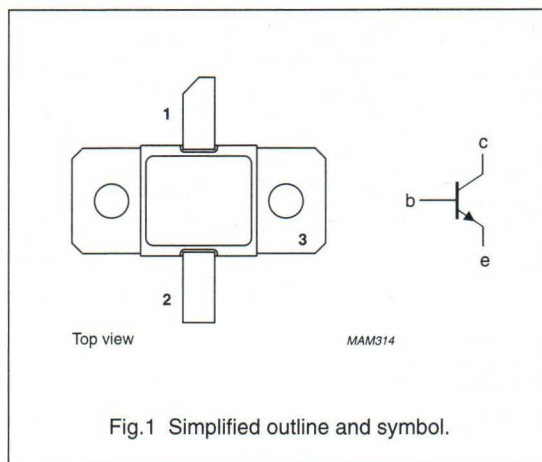

QUICK REFERENCE DATA

Microwave performance up to $T_{mb} = 25\text{ }^{\circ}\text{C}$ in a common base class B wideband amplifier.

MODE OF OPERATION	f (GHz)	V _{CC} (V)	P _L (W)	G _p (dB)	η_c (%)	Z _i ; Z _L (Ω)
Class-B; $t_p = 150\text{ }\mu\text{s}$; $\delta = 5\%$	1.2 to 1.4	50	≥ 70	≥ 7	≥ 35	see Fig 4

WARNING

Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.


NPN microwave power transistor

RZ1214B65Y

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	—	65	V
V_{CEO}	collector-emitter voltage	open base	—	15	V
V_{CES}	collector-emitter voltage	$R_{BE} = 0\ \Omega$	—	60	V
V_{EBO}	emitter-base voltage	open collector	—	3	V
I_C	collector current (DC)	$t_p \leq 150\ \mu s; \delta \leq 5\%$	—	6	A
P_{tot}	total power dissipation	$T_{mb} \leq 75\ ^\circ C; t_p \leq 150\ \mu s; \delta \leq 5\%$	—	225	W
T_{stg}	storage temperature		-65	+200	$^\circ C$
T_j	operating junction temperature		—	200	$^\circ C$
T_{slid}	soldering temperature	at 0.2 mm from the case; $t \leq 10\ s$	—	235	$^\circ C$

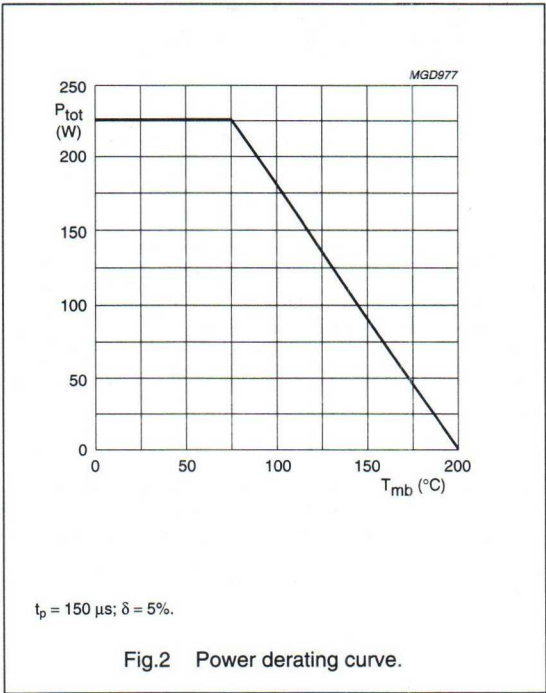

NPN microwave power transistor

RZ1214B65Y

THERMAL CHARACTERISTICS

 $T_j = 75\text{ }^{\circ}\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
$R_{th\ j-mb}$	thermal resistance from junction to mounting-base		2.5	K/W
$R_{th\ mb-h}$	thermal resistance from mounting-base to heatsink	note 1	0.2	K/W
$Z_{th\ j-h}$	thermal resistance from junction to heatsink	$t_p = 100\text{ }\mu\text{s}$; $\delta = 10\%$; notes 1 and 2	0.55	K/W

Notes

1. See "Mounting recommendations in the General part of handbook SC15".
2. Equivalent thermal impedance under pulsed microwave operating conditions.

CHARACTERISTICS

 $T_{mb} = 25\text{ }^{\circ}\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
$V_{(BR)CBO}$	collector-base breakdown voltage	$I_C = 40\text{ mA}$; $I_E = 0$	65	—	V
$V_{(BR)CES}$	collector-emitter breakdown voltage	$I_C = 40\text{ mA}$; $R_{BE} = 0$	60	—	V
I_{CBO}	collector cut-off current	$V_{CB} = 50\text{ V}$; $I_E = 0$	—	4	mA
I_{EBO}	emitter cut-off current	$V_{EB} = 1.5\text{ V}$; $I_C = 0$	—	0.4	mA


APPLICATION INFORMATION

The transistors are 100% tested under the following conditions.

MODE OF OPERATION	CONDITIONS	f (GHz)	V_{CC} (V)	P_L (W)	G_p (dB)	η_c (%)	Z_i ; Z_L (Ω)
Class-B	$t_p = 150\text{ }\mu\text{s}$; $\delta = 5\%$	1.2 to 1,4	50	typ.80; >70	typ.7.8; >7	typ.40; >35	see Fig 4
	$t_p = 300\text{ }\mu\text{s}$; $\delta = 10\%$	1.2 to 1,4	50	typ.80;	typ.7	typ.30	see Fig 4


NPN microwave power transistor

RZ1214B65Y

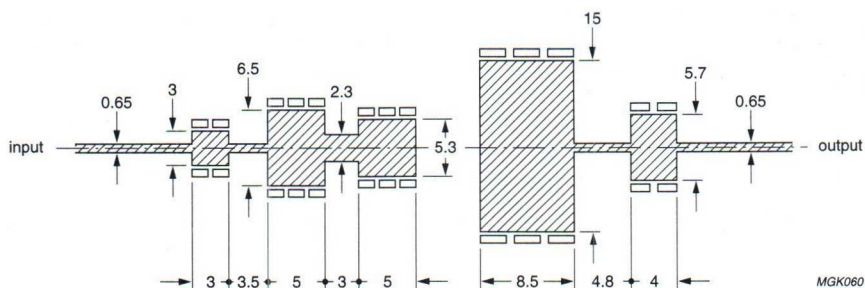

Dimensions in mm.
 Substrate: Epsilam.
 Thickness: 0.635 mm.
 Permittivity: $\epsilon_r = 10$.

Fig.3 Wideband test circuit for class B operation at 1.2 to 1.4 GHz.

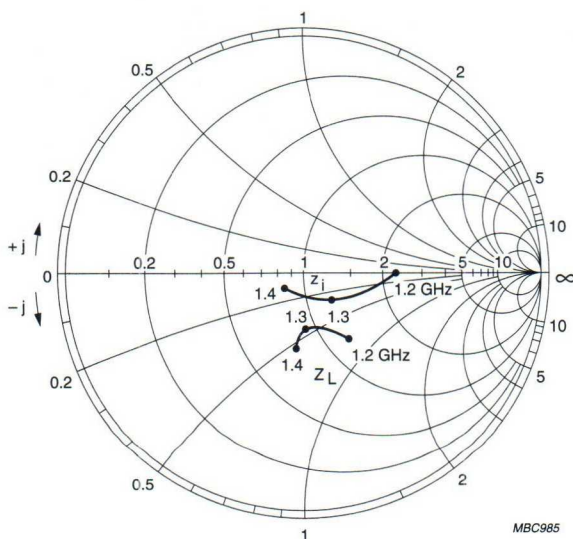

Class B operation; $V_{CE} = 50$ V; $P_L = 65$ W; $Z_0 = 5 \Omega$; $t_p = 150 \mu s$; $\delta = 5\%$.


Fig.4 Input and optimum load impedances as functions of frequency; typical values.

PACKAGE OUTLINES

	Page
SOT100	348
SOT122A	349
SOT422A	350
SOT423A	351
SOT437A	352
SOT439A	353
SOT440A	354
SOT441A	355
SOT442A	356
SOT443A	357
SOT445A	358
SOT445B	359
SOT446A	360
SOT447A	361
SOT448A	362
SOT469A	363

Microwave transistors

Package outlines

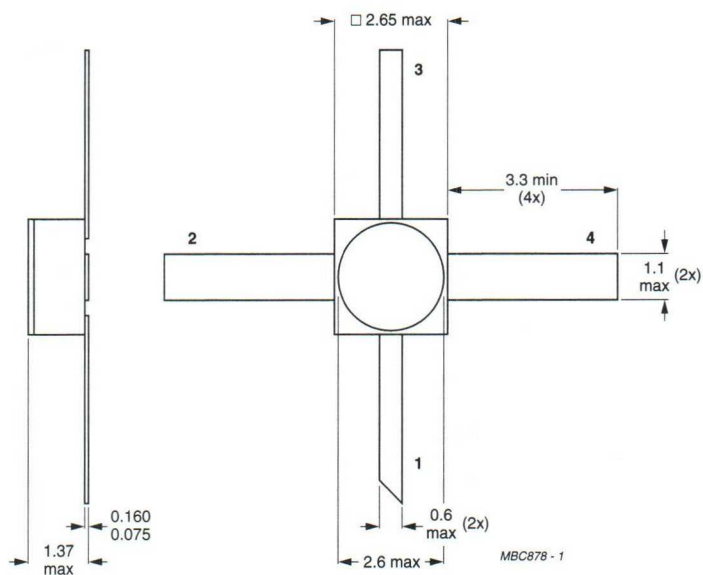


Dimensions in mm.

SOT100.

Microwave transistors

Package outlines

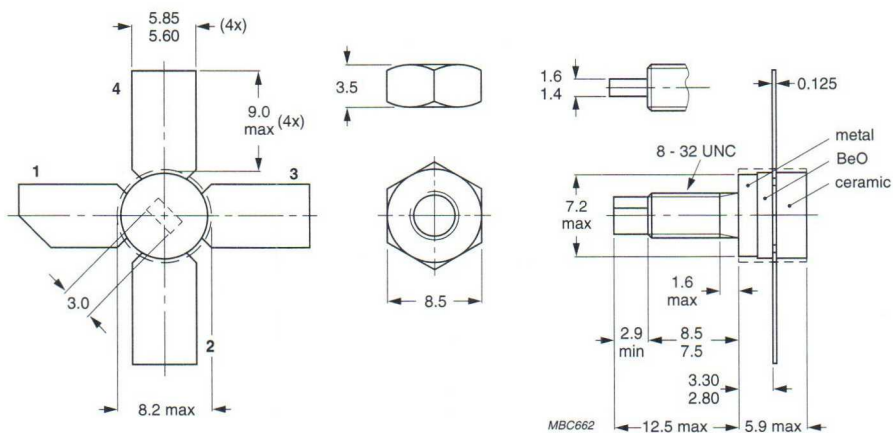


Dimensions in mm.

SOT122A.

Flanged hermetic ceramic package; 2 mounting holes; 2 leads

SOT422A

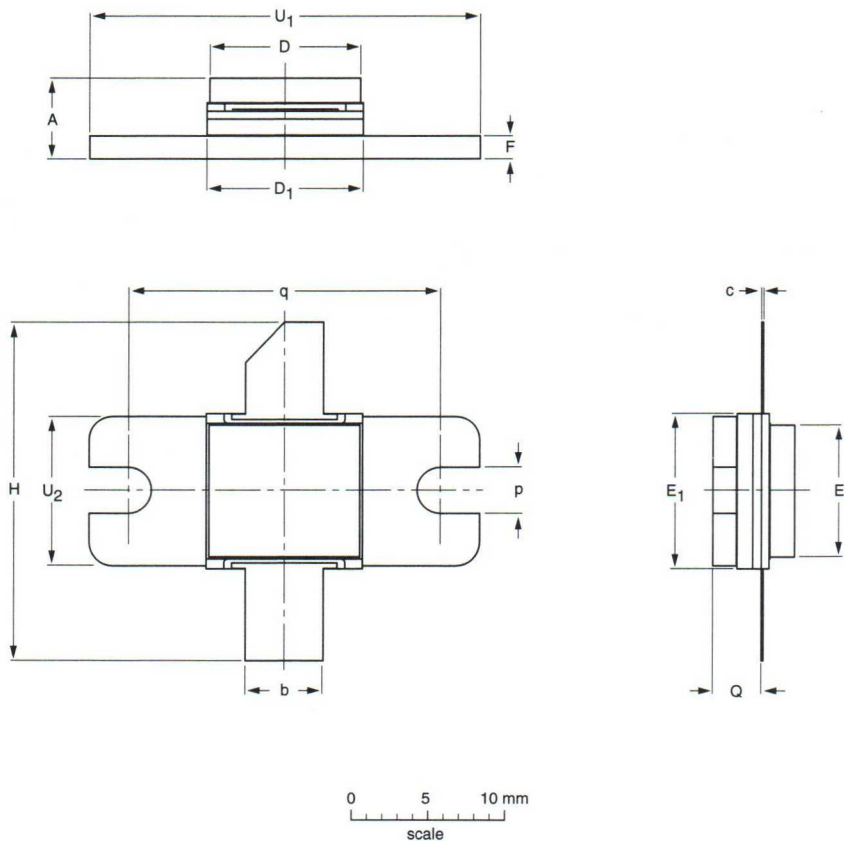


DIMENSIONS (mm are the original dimensions)

UNIT	A	b	c	D	D ₁	E	E ₁	F	H	p	Q	q	U ₁	U ₂
mm	5.58 5.04	5.21 4.95	0.16 0.10	9.93 9.67	10.29 10.03	8.77 8.51	10.29 10.03	1.58 1.46	21.97 21.71	3.43 3.17	3.34 2.96	16.64 16.38	22.99 22.73	9.91 9.65

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	EIAJ			
SOT422A						97-02-28

Flanged hermetic ceramic package; 2 mounting holes; 2 leads

SOT423A

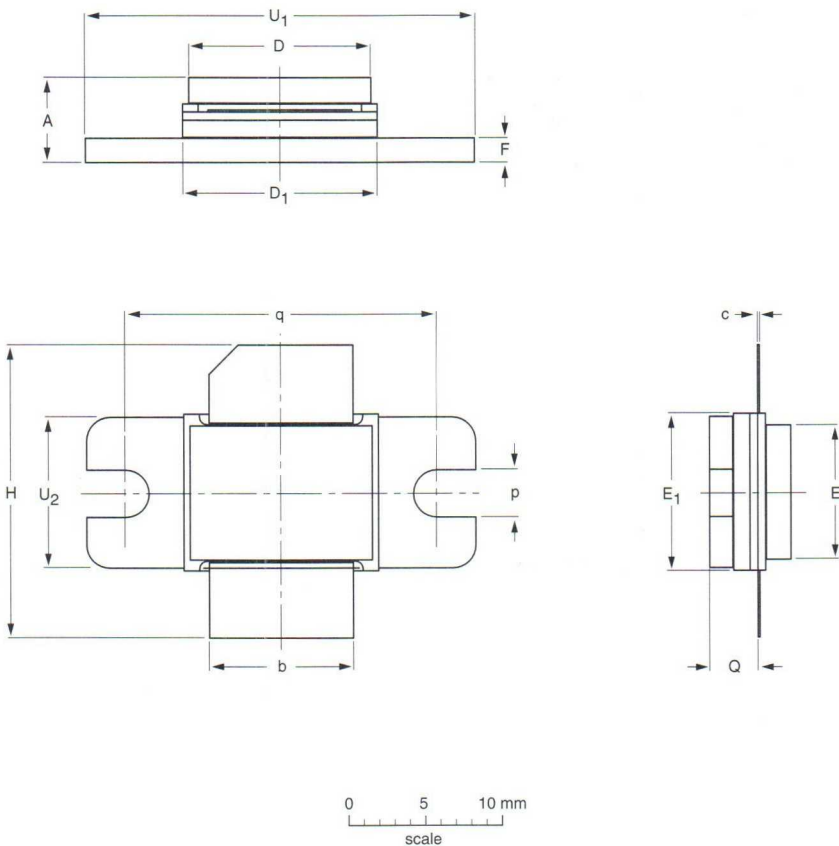


DIMENSIONS (mm are the original dimensions)

UNIT	A	b	c	D	D ₁	E	E ₁	F	H	p	Q	q	U ₁	U ₂
mm	5.58 5.04	9.53 9.27	0.16 0.10	12.02 11.76	12.83 12.57	8.82 8.56	10.29 10.03	1.58 1.46	19.18 18.92	3.43 3.17	3.42 2.88	16.64 16.38	22.99 22.73	9.91 9.65

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	EIAJ			
SOT423A						97-02-28

Microwave transistors

Package outlines

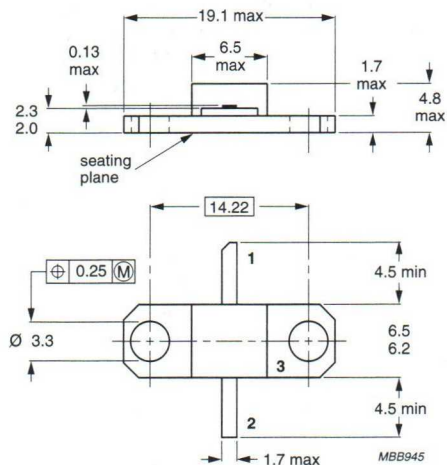

Dimensions in mm.

Torque on nut: max 0.5 Nm.


Recommended screw: M3.

Recommended pitch for mounting screw: 19 mm.

SOT437A.

Microwave transistors

Package outlines

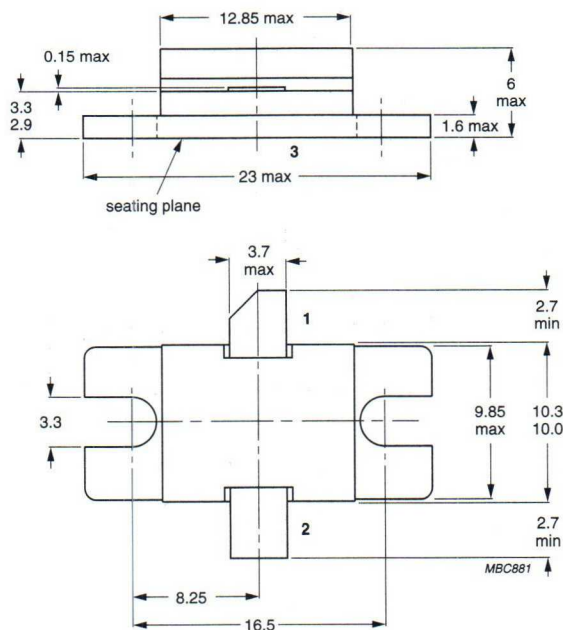

Dimensions in mm.

Torque on screws: max. 0.4 Nm.


Recommended screw: M3.

Recommended pitch for mounting screws: 19 mm.

SOT439A.

Microwave transistors

Package outlines

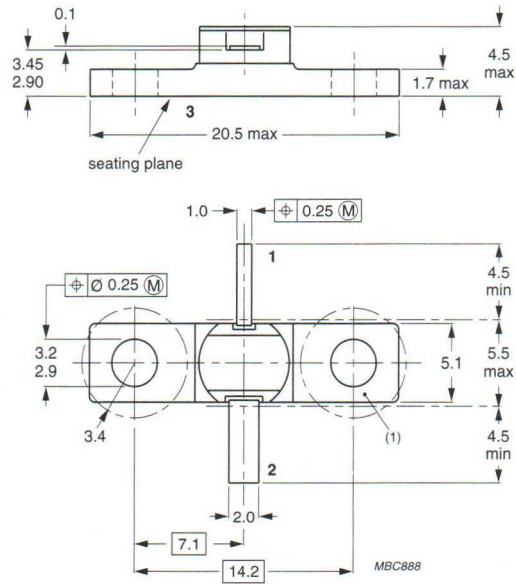

Dimensions in mm.
Torque on screws: max. 0.4 Nm.
Recommended screw: M2.5.


SOT440A.

Microwave transistors

Package outlines

Studless ceramic package; 4 leads

SOT441A

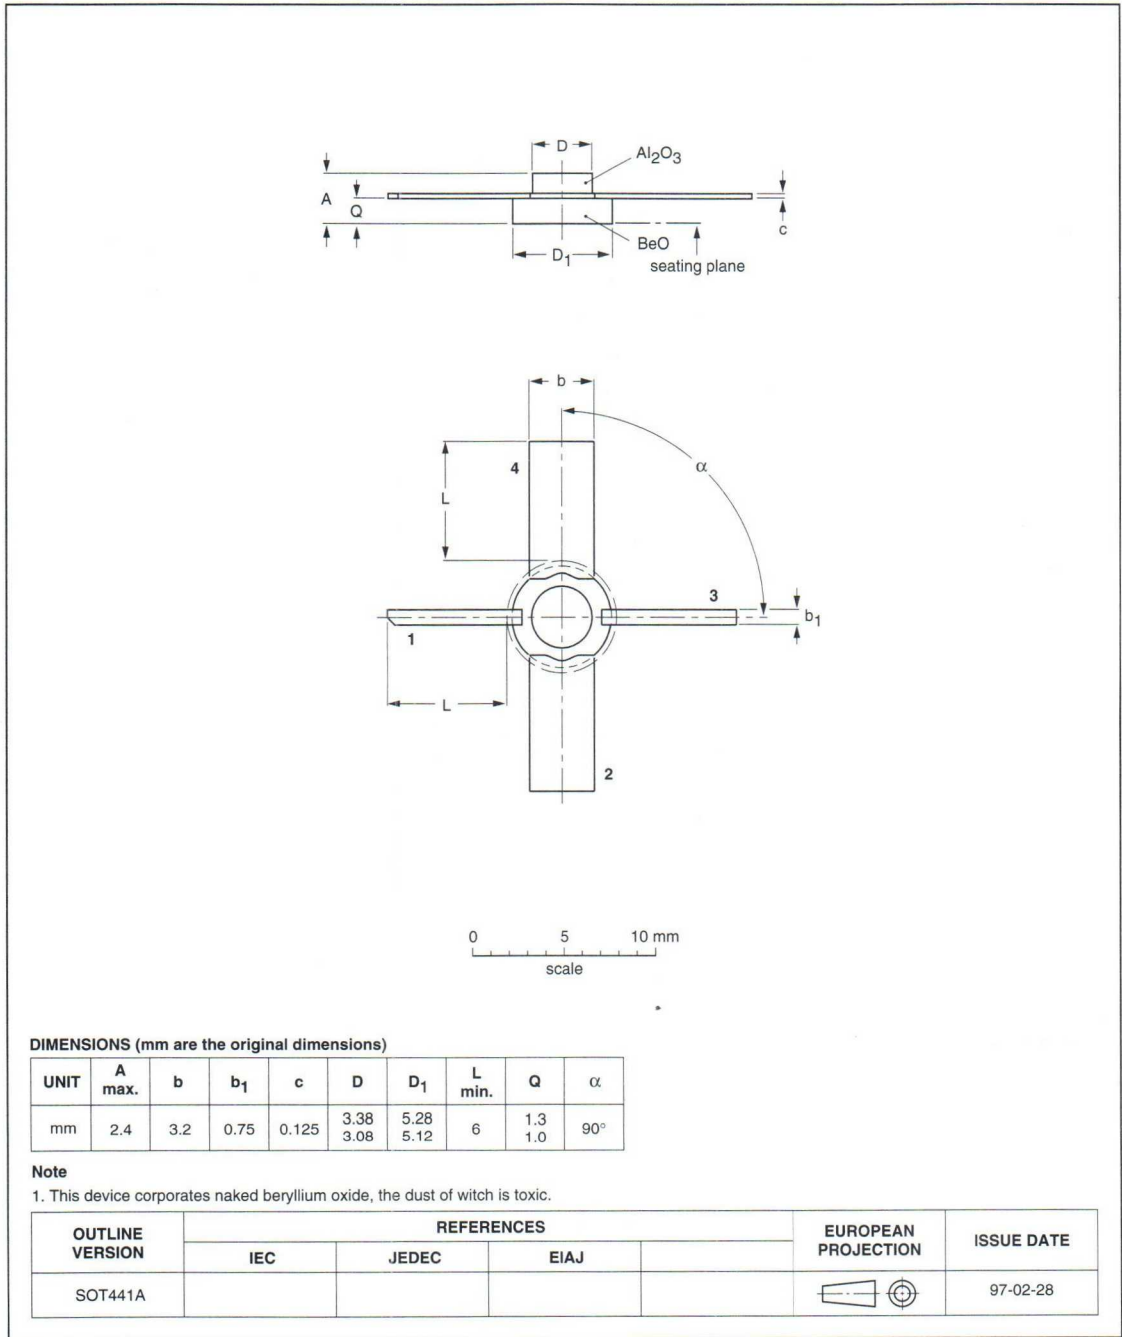


Microwave transistors

Package outlines

Studded ceramic package; 4 leads

SOT442A

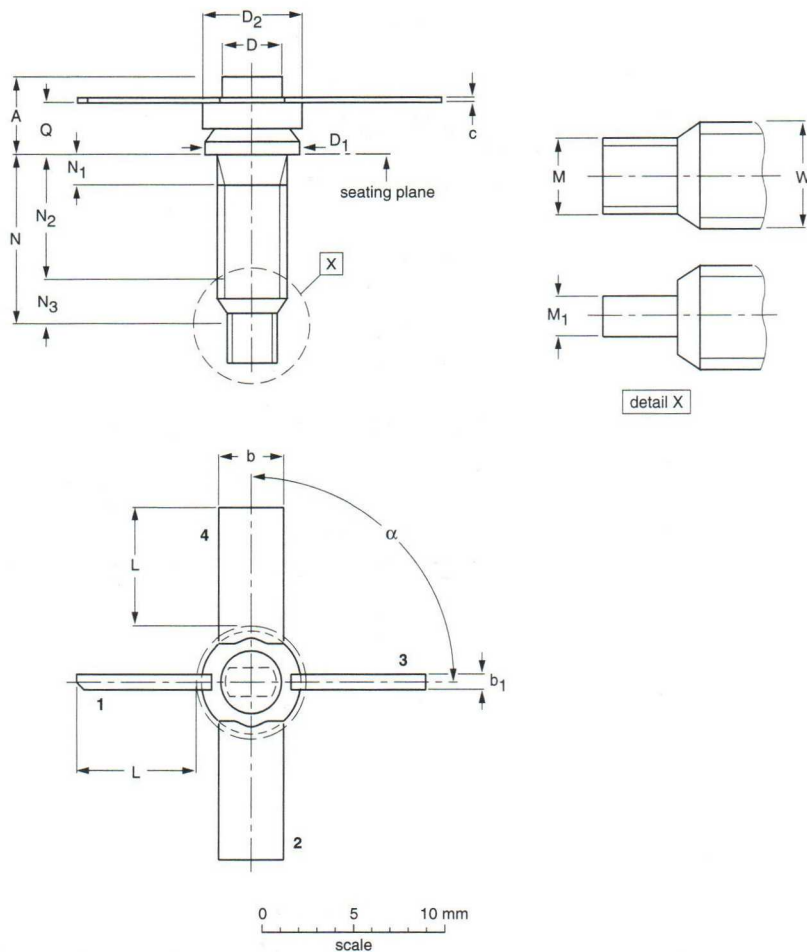

DIMENSIONS (mm are the original dimensions)

UNIT	A max.	b	b ₁	c	D	D ₁	D ₂	L min.	M	M ₁	N max.	N ₁ max.	N ₂	N ₃ min	Q	W	α
mm	4.0	3.2	0.75	0.125	3.38 3.08	5.25 5.10	5.28 5.12	6	3.27 3.01	1.6 1.4	12.5	1.6	8.5 7.5	2.9	2.80 2.50	8-32 UNC	90°


Note

1. This device incorporates naked beryllium oxide, the dust of witch is toxic.

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	EIAJ			
SOT442A						97-02-28

Microwave transistors

Package outlines

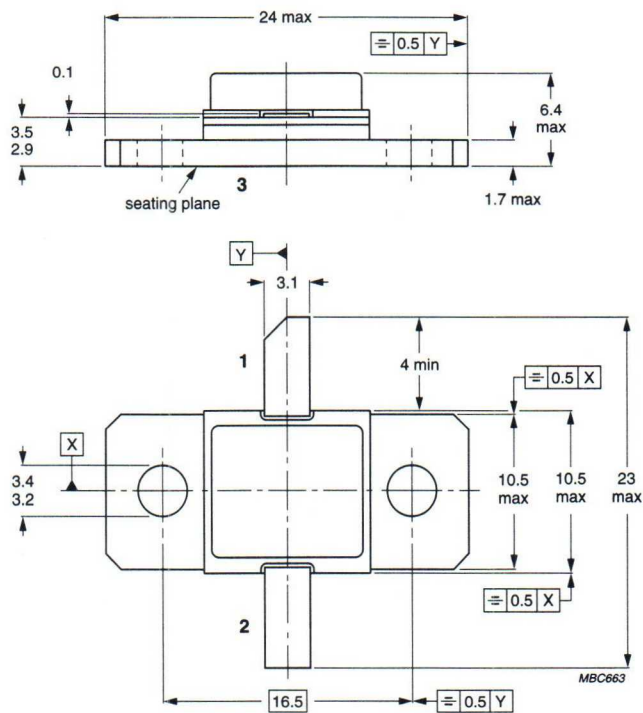


Dimensions in mm.
Torque on screw: Max. 0.5 Nm.
Recommended screw: M3.

SOT443A.


Microwave transistors

Package outlines

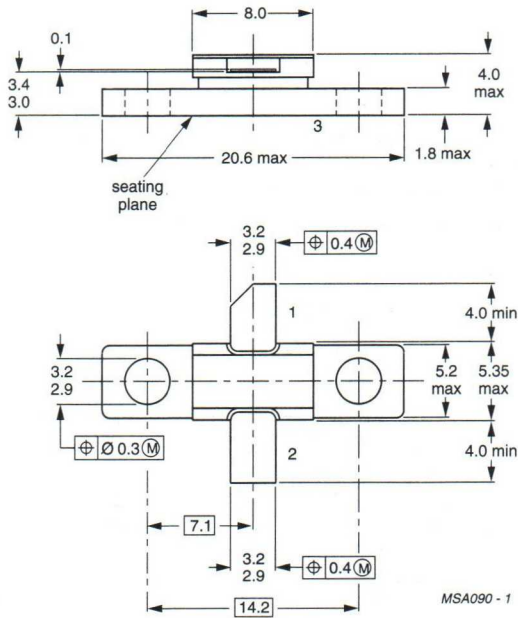

Dimensions in mm.
 Torque on screw: Max. 0.4 Nm
 Recommended screw: M2.5 or cheesehead 4-40 UNC/2A.

SOT445A.

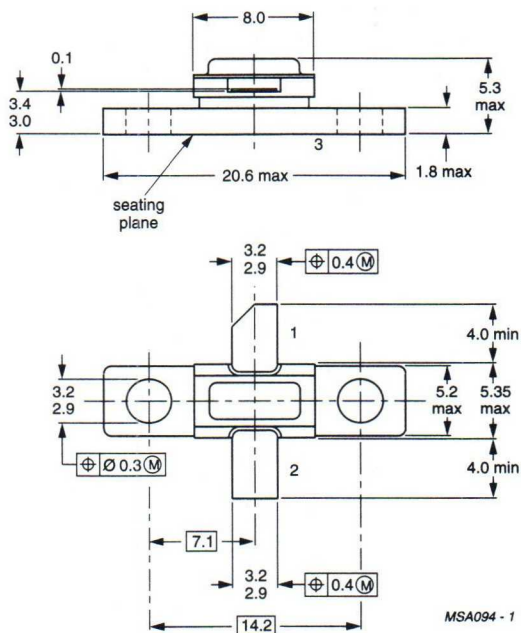

Dimensions in mm.


Torque on screw: Max. 0.4 Nm

Recommended screw: M2.5 or cheesehead 4-40 UNC/2A.

SOT445B.

Microwave transistors

Package outlines

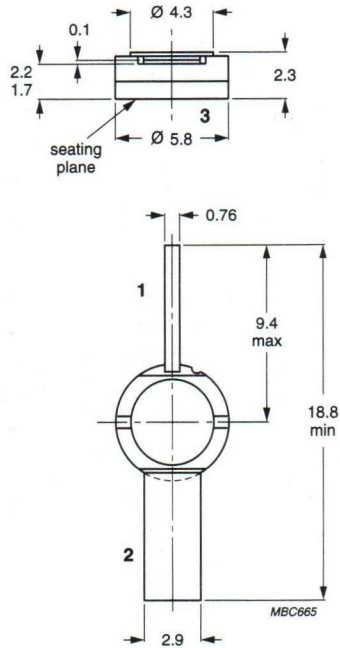

Dimensions in mm.



SOT446A.

Microwave transistors

Package outlines

Flangeless ceramic package; 2 leads

SOT447A

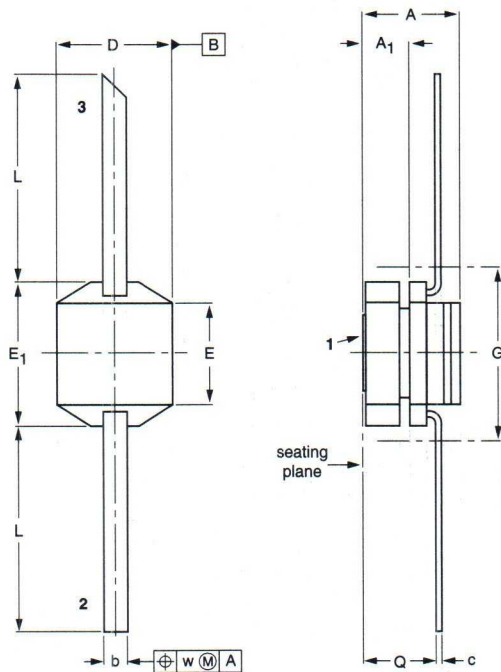


DIMENSIONS (mm are the original dimensions)

UNIT	A max.	A ₁ max.	b	c	D	E	E ₁	G max.	L min.	Q	w
mm	2.8	1.3	0.58	0.1	2.8	2.64 2.38	3.61 3.35	3.8	3.1	1.7	0.2

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	EIAJ			
SOT447A						97-02-28

Microwave transistors

Package outlines

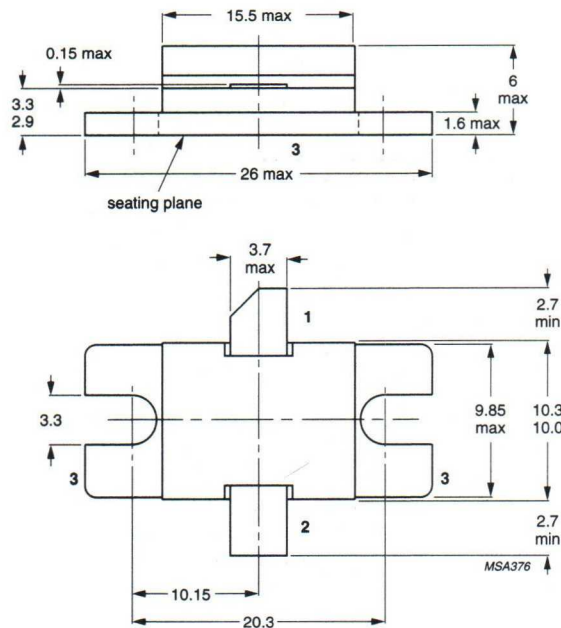

Dimensions in mm.

Torque on screws: max. 0.5 Nm.


Recommended screw: M3.

Recommended pitch for mounting screws: 19 mm.

SOT448A.

Flanged hermetic ceramic package; 2 mounting holes; 2 leads

SOT469A

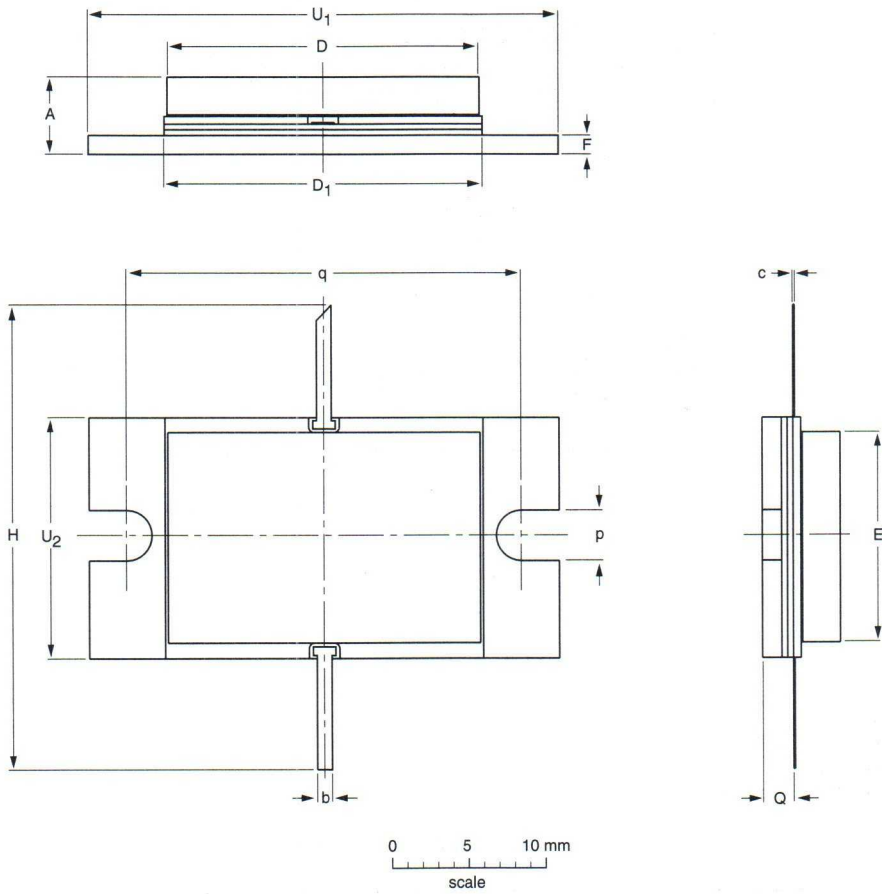

DIMENSIONS (mm are the original dimensions)

UNIT	A	b	c	D	D ₁	E	F	H	p	Q	q	U ₁	U ₂
mm	5.73 4.53	1.12 0.86	0.13 0.07	20.76 20.44	21.11 20.85	13.95 13.63	1.40 1.14	30.61 30.35	3.43 3.17	2.16 1.90	26.14 25.88	31.12 30.86	15.93 15.67

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	EIAJ			
SOT469A						97-02-28

DATA HANDBOOK SYSTEM

DATA HANDBOOK SYSTEM

Philips Semiconductors data handbooks contain all pertinent data available at the time of publication and each is revised and reissued regularly.

Loose data sheets are sent to subscribers to keep them up-to-date on additions or alterations made during the lifetime of a data handbook.

Catalogues are available for selected product ranges (some catalogues are also on floppy discs).

Our data handbook titles are listed here.

Integrated circuits

<i>Book</i>	<i>Title</i>
IC01	Semiconductors for Radio and Audio Systems
IC02	Semiconductors for Television and Video Systems
IC03	Semiconductors for Wired Telecom Systems
IC04	HE4000B Logic Family CMOS
IC05	Advanced Low-power Schottky (ALS) Logic
IC06	High-speed CMOS Logic Family
IC11	General-purpose/Linear ICs
IC12	I ² C Peripherals
IC13	Programmable Logic Devices (PLD)
IC14	8048-based 8-bit Microcontrollers
IC15	FAST TTL Logic Series
IC16	CMOS ICs for Clocks and Watches
IC17	Semiconductors for Wireless Communications
IC18	Semiconductors for In-Car Electronics
IC19	ICs for Data Communications
IC20	80C51-based 8-bit Microcontrollers
IC22	Multimedia ICs
IC23	BiCMOS Bus Interface Logic
IC24	Low Voltage CMOS & BiCMOS Logic
IC25	16-bit 80C51XA Microcontrollers (eXtended Architecture)
IC26	IC Package Databook

Discrete semiconductors

<i>Book</i>	<i>Title</i>
SC01	Small-signal and Medium-power Diodes
SC02	Power Diodes
SC03	Thyristors and Triacs
SC04	Small-signal Transistors
SC05	Video Transistors and Modules for Monitors
SC06	High-voltage and Switching NPN Power Transistors
SC07	Small-signal Field-effect Transistors
SC08a	RF Power Transistors for HF and VHF
SC08b	RF Power Transistors for UHF
SC09	RF Power Modules and Transistors for Mobile Phones
SC13a	PowerMOS Transistors including TOPFETs and IGBTs
SC13b	Small-signal and Medium-power MOS Transistors
SC14	RF Wideband Transistors
SC15	Microwave Transistors (new version planned)
SC16	Wideband Hybrid IC Modules
SC17	Semiconductor Sensors

Professional components

PC06	Circulators and Isolators
------	---------------------------

MORE INFORMATION FROM PHILIPS SEMICONDUCTORS?

For more information about Philips Semiconductors data handbooks, catalogues and subscriptions contact your nearest Philips Semiconductors national organization, select from the **address list on the back cover of this handbook**. Product specialists are at your service and enquiries are answered promptly.

OVERVIEW OF PHILIPS COMPONENTS DATA HANDBOOKS

Our sister product division, Philips Components, also has a comprehensive data handbook system to support their products. Their data handbook titles are listed here.

Display components

<i>Book</i>	<i>Title</i>
DC01	Colour Television Tubes
DC02	Monochrome Monitor Tubes and Deflection Units
DC03	Television Tuners, Coaxial Aerial Input Assemblies
DC04	Colour Monitor Tubes
DC05	Flyback Transformers, Mains Transformers and General-purpose FXC Assemblies

Magnetic products

MA01	Soft Ferrites
MA03	Piezoelectric Ceramics Specialty Ferrites
MA04	Dry-reed Switches

Passive components

PA01	Electrolytic Capacitors
PA02	Varistors, Thermistors and Sensors
PA03	Potentiometers
PA04	Variable Capacitors
PA05	Film Capacitors
PA06	Ceramic Capacitors
PA08	Fixed Resistors
PA10	Quartz Crystals
PA11	Quartz Oscillators

MORE INFORMATION FROM PHILIPS COMPONENTS?

For more information contact your nearest Philips Components national organization shown in the following list.

Argentina: BUENOS AIRES, Tel. (01) 786 7635, Fax. (01) 786 9397.
Australia: NORTH RYDE, Tel. (02) 9805 4455, Fax. (02) 9805 4466.
Austria: WIEN, Tel. (01) 601 01 12 41, Fax. (01) 60 101 12 11.
Belarus: MINSK, Tel. (5172) 200 915, Fax. (5172) 200 773.
Benelux: EINDHOVEN, Tel. (+31 40) 2783 749, Fax. (+31 40) 2788 399.
Brazil: SÃO PAULO, Tel. (011) 821 2333, Fax. (011) 829 1849.
Canada: SCARBOROUGH, Tel. (0416) 292 5161, Fax. (0416) 754 6248.
China: SHANGHAI, Tel. (021) 6485 0600, Fax. (021) 6485 5615.
Colombia: BOGOTÁ, Tel. (01) 345 8713, Fax. (01) 345 8712.
Denmark: COPENHAGEN, Tel. (32) 883 333, Fax. (31) 571 949.
Finland: ESPOO, Tel. 9 (0)-615 800, Fax. 9 (0)-615 80510.
France: SURESNES, Tel. (01) 4099 6161, Fax. (01) 4099 6427.
Germany: HAMBURG, Tel. (040) 2489-0, Fax. (040) 2489 1400.
Greece: TAVROS, Tel. (01) 4894 339/(01) 4894 239, Fax. (01) 4814 240.
Hong Kong: KOWLOON, Tel. 2784 3000, Fax. 2784 3003.
India: BOMBAY, Tel. (022) 4938 541, Fax. (022) 4938 722.
Indonesia: JAKARTA, Tel. (021) 520 1122, Fax. (021) 520 5189.
Ireland: DUBLIN, Tel. (01) 76 40 203, Fax. (01) 76 40 210.
Israel: TEL AVIV, Tel. (03) 6450 444, Fax. (03) 6491 007.
Italy: MILANO, Tel. (02) 6752 2531, Fax. (02) 6752 2557.
Japan: TOKYO, Tel. (03) 3740 5028, Fax. (03) 3740 0580.
Korea (Republic of): SEOUL, Tel. (02) 709 1472, Fax. (02) 709 1480.
Malaysia: PULAU PINANG, Tel. (04) 657 055, Fax. (04) 656 5951.
Mexico: EL PASO, Tel. (915) 772 4020, Fax. (915) 772 4332.
New Zealand: AUCKLAND, Tel. (09) 849 4160, Fax. (09) 849 7811.
Norway: OSLO, Tel. (22) 74 8000, Fax. (22) 74 8341.
Pakistan: KARACHI, Tel. (021) 587 4641-49, Fax. (021) 577 035/(021) 587 4546.
Philippines: MANILA, Tel. (02) 816 6380, Fax. (02) 817 3474.
Poland: WARSZAWA, Tel. (022) 612 2594, Fax. (022) 612 2327.
Portugal: LINDA-A-VELHA, Tel. (01) 416 3160/416 3333, Fax. (01) 416 3174/416 3366.
Russia: MOSCOW, Tel. (095) 247 9124, Fax. (095) 247 9132.
Singapore: SINGAPORE, Tel. 350 2000, Fax. 355 1758.
South Africa: JOHANNESBURG, Tel. (011) 470 5911, Fax. (011) 470 5494.
Spain: BARCELONA, Tel. (93) 301 63 12, Fax. (93) 301 42 43.
Sweden: STOCKHOLM, Tel. (+46) 8 632 2000, Fax. (+46) 8 632 2745.
Switzerland: ZÜRICH, Tel. (01) 488 22 11, Fax. (01) 481 77 30.
Taiwan: TAIPEI, Tel. (02) 388 7666, Fax. (02) 382 4382.
Thailand: BANGKOK, Tel. (02) 745 4090, Fax. (02) 398 0793.
Turkey: ISTANBUL, Tel. (0212) 279 2770, Fax. (0212) 282 6707.
Ukraine: KIEV, Tel. (044) 268 7327, Fax. (044) 268 6323.
United Kingdom: DORKING, Tel. (01306) 512 000, Fax. (01306) 512 345.
United States: JUPITER, FL, Tel. (561) 745 3300, Fax. (561) 745 3600.
Uruguay: MONTEVIDEO, Tel. (02) 704 044, Fax. (02) 920 601.

For all other countries apply to:

Philips Components,
Marketing Communications,
P.O. Box 218,
5600 MD EINDHOVEN, The Netherlands
Fax. +31-40-2724547.

North American Sales Offices, Representatives and Distributors

PHILIPS SEMICONDUCTORS

811 East Arques Avenue
P.O. Box 3409
Sunnyvale, CA 94088-3409

ALABAMA

Huntsville

Philips Semiconductors
Phone: (205) 464-0111
(205) 464-9101

Elcom, Inc.
Phone: (205) 830-4001

ARIZONA

Scottsdale

Thom Luke Sales, Inc.
Phone: (602) 451-5400

Tempe

Philips Semiconductors
Phone: (602) 820-2225

CALIFORNIA

Calabasas

Philips Semiconductors
Phone: (818) 880-6304

Centaur Corporation
Phone: (818) 878-5800

Irvine

Philips Semiconductors
Phone: (714) 453-0770

Centaur Corporation
Phone: (714) 261-2123

Loomis

B.A.E. Sales, Inc.
Phone: (916) 652-6777

San Diego

Philips Semiconductors
Phone: (619) 560-0242

San Jose

B.A.E. Sales, Inc.
Phone: (408) 452-8133

Sunnyvale

Philips Semiconductors
Phone: (408) 991-3737

COLORADO

Englewood

Philips Semiconductors
Phone: (303) 792-9011

Thom Luke Sales, Inc.
Phone: (303) 649-9717

CONNECTICUT

Wallingford

JEBCO
Phone: (203) 265-1318

FLORIDA

Clearwater

Conley and Assoc., Inc.
Phone: (813) 572-8895

Oviedo

Conley and Assoc., Inc.
Phone: (407) 365-3283

GEORGIA

Norcross

Elcom, Inc.
Phone: (770) 447-8200

ILLINOIS

Itasca

Philips Semiconductors
Phone: (708) 250-0050

Schaumburg

Micro-Tex, Inc.
Phone: (708) 885-8200

INDIANA

Indianapolis

Mohrfield Marketing, Inc.
Phone: (317) 546-6969

Kokomo

Philips Semiconductors
Phone: (765) 459-5355

MARYLAND

Columbia

Third Wave Solutions, Inc.
Phone: (410) 290-5990

MASSACHUSETTS

Chelmsford

JEBCO
Phone: (508) 256-5800

Westford

Philips Semiconductors
Phone: (508) 692-6211

MICHIGAN

Novi

Philips Semiconductors
Phone: (810) 347-1700

Mohrfield Marketing, Inc.
Phone: (810) 380-8100

MINNESOTA

Bloomington

High Technology Sales
Phone: (612) 844-9933

MISSOURI

Bridgeton

Centech, Inc.
Phone: (314) 291-4230

Raytown

Centech, Inc.
Phone: (816) 358-8100

NEW JERSEY

Toms River

Philips Semiconductors
Phone: (908) 505-1200
(908) 240-1479

NEW YORK

Ithaca

Bob Dean, Inc.
Phone: (607) 257-0007

Rockville Centre

S-J Associates
Phone: (516) 536-4242

Wappingers Falls

Philips Semiconductors
Phone: (914) 297-4074

Bob Dean, Inc.
Phone: (914) 297-6406

NORTH CAROLINA

Cary

Philips Semiconductors
Phone: (919) 462-1332

Charlotte

Elcom, Inc.
Phone: (704) 543-1229

Greensboro

Elcom, Inc.
Phone: (919) 273-8887

Matthews

Elcom, Inc.
Phone: (704) 847-4323

OHIO

Columbus

Great Lakes Group, Inc.
Phone: (614) 885-6700

Kettering

Great Lakes Group, Inc.
Phone: (513) 298-7322

Solon

Great Lakes Group, Inc.
Phone: (216) 349-2700

OREGON

Beaverton

Philips Semiconductors
Phone: (503) 627-0110

Western Technical Sales
Phone: (503) 644-8860

PENNSYLVANIA

Erie

S-J Associates, Inc.
Phone: (216) 888-7004

Hatboro

Delta Technical Sales, Inc.
Phone: (215) 957-0600

Pittsburgh

S-J Associates, Inc.
Phone: (216) 349-2700

TENNESSEE

Dandridge

Philips Semiconductors
Phone: (615) 397-5053

TEXAS

Austin

Philips Semiconductors
Phone: (512) 339-9945

OM Associates
Phone: (512) 794-9971

Houston

Philips Semiconductors
Phone: (281) 999-1316

OM Associates
Phone: (713) 376-6400

Richardson

Philips Semiconductors
Phone: (972) 644-1610
(972) 705-9555

OM Associates
Phone: (972) 690-6746

UTAH

Salt Lake City

Electrodyne
Phone: (801) 264-8050

WASHINGTON

Bellevue

Western Technical Sales
Phone: (206) 641-3900

Spokane

Western Technical Sales
Phone: (509) 922-7600

WISCONSIN

Waukesha

Micro-Tex, Inc.
Phone: (414) 542-5352

CANADA

PHILIPS

SEMICONDUCTORS

CANADA, LTD.

Calgary, Alberta

Philips Semiconductors/
Components, Inc.

Phone: (403) 735-6233

Tech-Trek, Ltd.
Phone: (403) 241-1719

Kanata, Ontario

Philips Semiconductors
Phone: (613) 599-8720

Tech-Trek, Ltd.
Phone: (613) 599-8787

Montreal, Quebec

Philips Semiconductors/
Components, Inc.
Phone: (514) 424-7320

Mississauga, Ontario

Tech-Trek, Ltd.
Phone: (416) 238-0366

Richmond, B.C.

Tech-Trek, Ltd.
Phone: (604) 276-8735

Scarborough, Ontario

Philips Semiconductors/
Components, Ltd.
(416) 292-5161

Ville St. Laurent, Quebec

Tech-Trek, Ltd.
Phone: (514) 337-7540

MEXICO

Anzures Section

Philips Components
Phone: +9-5 (800) 234-7381

El Paso, TX

Philips Components
Phone: (915) 775-4020

PUERTO RICO

Caguas

Mectron Group
Phone: (809) 746-3522

DISTRIBUTORS

Contact one of our

local distributors:

Allied Electronics
Anthem Electronics
Arrow/Schweber Electronics
Future Electronics
Hamilton Hallmark
Marshall Industries
Newark Electronics
Penstock
Richardson Electronics
Zeus Electronics

Philips Semiconductors – a worldwide company

Argentina: see South America

Australia: 34 Waterloo Road, NORTH RYDE, NSW 2113,
Tel. +61 2 9805 4455, Fax. +61 2 9805 4466

Austria: Computerstr. 6, A-1101 WIEN, P.O. Box 213,
Tel. +43 1 60 101, Fax. +43 1 60 101 1210

Belarus: Hotel Minsk Business Center, Bld. 3, r. 1211, Volodarski Str. 6,
220050 MINSK, Tel. +375 172 200 733, Fax. +375 172 200 773

Belgium: see The Netherlands

Brazil: see South America

Bulgaria: Philips Bulgaria Ltd., Energoproject, 15th floor,
51 James Bourchier Blvd., 1407 SOFIA,
Tel. +359 2 689 211, Fax. +359 2 689 102

Canada: PHILIPS SEMICONDUCTORS/COMPONENTS, Tel. +1 800 234 7381

China/Hong Kong: 501 Hong Kong Industrial Technology Centre,
72 Tat Chee Avenue, Kowloon Tong, HONG KONG,
Tel. +852 2319 7888, Fax. +852 2319 7700

Colombia: see South America

Czech Republic: see Austria

Denmark: Prags Boulevard 80, PB 1919, DK-2300 COPENHAGEN S,
Tel. +45 32 88 2636, Fax. +45 31 57 1949

Finland: Sinikalliontie 3, FIN-02630 ESPOO,
Tel. +358 9 615800, Fax. +358 9 61580/xxx

France: 4 Rue du Port-aux-Vins, BP317, 92156 SURESNES Cedex,
Tel. +33 1 40 99 6161, Fax. +33 1 40 99 6427

Germany: Hammerbrookstraße 69, D-20097 HAMBURG,
Tel. +49 40 23 53 60, Fax. +49 40 23 536 300

Greece: No. 15, 25th March Street, GR 17778 TAVROS/ATHENS,
Tel. +30 1 4894 339/239, Fax. +30 1 4814 240

Hungary: see Austria

India: Philips INDIA Ltd, Shivsagar Estate, A Block, Dr. Annie Besant Rd. Worli,
MUMBAI 400 018, Tel. +91 22 4938 541, Fax. +91 22 4938 722

Indonesia: see Singapore

Ireland: Newstead, Clonskeagh, DUBLIN 14,
Tel. +353 1 7640 000, Fax. +353 1 7640 200

Israel: RAPAC Electronics, 7 Kehilat Saloniki St, TEL AVIV 61180,
Tel. +972 3 645 0444, Fax. +972 3 649 1007

Italy: PHILIPS SEMICONDUCTORS, Piazza IV Novembre 3, 20124 MILANO,
Tel. +39 2 6752 2531, Fax. +39 2 6752 2557

Japan: Philips Bldg 13-37, Kohnan 2-chome, Minato-ku, TOKYO 108,
Tel. +81 3 3740 5130, Fax. +81 3 3740 5077

Korea: Philips House, 260-199 Itaewon-dong, Yongsan-ku, SEOUL,
Tel. +82 2 709 1412, Fax. +82 2 709 1415

Malaysia: No. 76 Jalan Universiti, 46200 PETALING JAYA, SELANGOR,
Tel. +60 3 750 5214, Fax. +60 3 757 4880

Mexico: 5900 Gateway East, Suite 200, EL PASO, TEXAS 79905,
Tel. +9-5 800 234 7381

Middle East: see Italy

Netherlands: Postbus 90050, 5600 PB EINDHOVEN, Bldg. VB,
Tel. +31 40 27 82785, Fax. +31 40 27 88399

New Zealand: 2 Wagener Place, C.P.O. Box 1041, AUCKLAND,
Tel. +64 9 849 4160, Fax. +64 9 849 7811

Norway: Box 1, Manglerud 0612, OSLO,
Tel. +47 22 74 8000, Fax. +47 22 74 8341

Philippines: Philips Semiconductors Philippines Inc.,
106 Valero St. Salcedo Village, P.O. Box 2108 MCC, MAKATI, Metro MANILA,
Tel. +63 2 816 6380, Fax. +63 2 817 3474

Poland: Ul. Lukiska 10, PL 04-123 WARSZAWA,
Tel. +48 22 612 2831, Fax. +48 22 612 2327

Portugal: see Spain

Romania: see Italy

Russia: Philips Russia, Ul. Usatcheva 35A, 119048 MOSCOW,
Tel. +7 095 755 6918, Fax. +7 095 755 6919

Singapore: Lorong 1, Toa Payoh, SINGAPORE 1231,
Tel. +65 350 2538, Fax. +65 251 6500

Slovakia: see Austria

Slovenia: see Italy

South Africa: S.A. PHILIPS Pty Ltd., 195-215 Main Road Martindale,
2092 JOHANNESBURG, P.O. Box 7430 Johannesburg 2000,
Tel. +27 11 470 5911, Fax. +27 11 470 5494

South America: Rua do Rocio 220, 5th floor, Suite 51, 04552-903 São Paulo,
SÃO PAULO - SP, Brazil, Tel. +55 11 821 2333, Fax. +55 11 829 1849

Spain: Balmes 22, 08007 BARCELONA,
Tel. +34 3 301 6312, Fax. +34 3 301 4107

Sweden: Kottbygatan 7, Akalla, S-16485 STOCKHOLM,
Tel. +46 8 632 2000, Fax. +46 8 632 2745

Switzerland: Allmendstrasse 140, CH-8027 ZÜRICH,
Tel. +41 1 488 2686, Fax. +41 1 481 7730

Taiwan: Philips Semiconductors, 6F, No. 96, Chien Kuo N. Rd., Sec. 1, TAIPEI,
Taiwan Tel. +886 2 2134 2870, Fax. +886 2 2134 2874

Thailand: PHILIPS ELECTRONICS (THAILAND) Ltd.,
209/2 Sanpavuth-Bangna Road Prakanong, BANGKOK 10260,
Tel. +66 2 745 4090, Fax. +66 2 398 0793

Turkey: Talatpasa Cad. No. 5, 80640 GÜLTEPE/ISTANBUL,
Tel. +90 212 279 2770, Fax. +90 212 282 6707

Ukraine: PHILIPS UKRAINE, 4 Patrice Lumumba str., Building B, Floor 7,
252042 KIEV, Tel. +380 44 264 2776, Fax. +380 44 268 0461

United Kingdom: Philips Semiconductors Ltd., 276 Bath Road, Hayes,
MIDDLESEX UB3 5BX, Tel. +44 181 730 5000, Fax. +44 181 754 8421

United States: 811 East Arques Avenue, SUNNYVALE, CA 94088-3409,
Tel. +1 800 234 7381

Uruguay: see South America

Vietnam: see Singapore

Yugoslavia: PHILIPS, Trg N. Pasica 5/v, 11000 BEOGRAD,
Tel. +381 11 625 344, Fax. +381 11 635 777

For all other countries apply to: Philips Semiconductors, Marketing & Sales Communications,
Building BE-p, P.O. Box 218, 5600 MD EINDHOVEN, The Netherlands, Fax. +31 40 27 24825

Internet: <http://www.semiconductors.philips.com>

© Philips Electronics N.V. 1997

SCH53

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Printed in The Netherlands

127137/13450/02/pp368

Date of release: 1997 Mar

Document order number: 9397 750 01445

Philips
Semiconductors



PHILIPS

Let's make things better.