

WATER COOLED R.F. POWER TRIODE

QUICK REFERENCE DATA

Frequency (MHz)	C telegraphy		C anode mod.		RF class B		AF class B Two tubes	
	V _a (kV)	W _o (kW)	V _a (kV)	W _o (kW)	V _a (kV)	W _o (kW)	V _a (kV)	W _o (kW)
10	15	120			15	110	12	78
30	12	90	11	66	12	110	10	78

HEATING: direct by A.C. or D.C.; filament thoriated tungsten

Filament voltage	V _f	=	12.6 V
Filament current	I _f	=	160 A

CAPACITANCES

Grid to filament	C _{gf}	=	120 pF
Anode to filament	C _{af}	=	1.4 pF
Anode to grid	C _{ag}	=	50 pF

TYPICAL CHARACTERISTICS

Anode voltage	V _a	=	3 kV
Anode current	I _a	=	1 A
Amplification factor	μ	=	58
Mutual conductance	S	=	60 mA/V

TEMPERATURE LIMITS (Absolute limits)

Bulb temperature	t	=	max. 220 °C
Seal temperature	t	=	max. 220 °C

COOLING

For cooling data see cooling curves.




For water inlet temperatures between 20 °C and 50 °C the required quantity of water can be found by proportional interpolation.

At frequencies higher than 10 MHz a low velocity air flow should be directed to the grid and filament seals.

MECHANICAL DATA

Dimensions in mm

Net weight: 6.2 kg

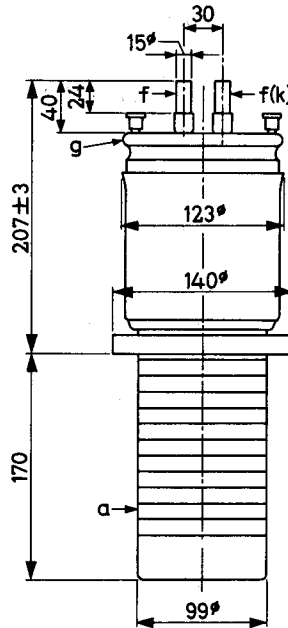

Mounting position: vertical with anode down

ACCESSORIES

Water jacket	K724
Filament connector	40670
Grid connector	40671

R.F. CLASS C TELEGRAPHY or F.M. TELEPHONY

LIMITING VALUES (Absolute limits)

Frequency	f	up to 10	up to 30	MHz
Anode voltage	V_a	= max. 16	max. 12.5	kV
Anode dissipation	W_a	= max. 45	max. 45	kW
Negative grid voltage	$-V_g$	= max. 1000	max. 1000	V
Grid dissipation	W_g	= max. 1.3	max. 1.3	kW
Anode current	I_a	= max. 13	max. 13	A
Grid current	I_g	= max. 3.3	max. 3.3	A

OPERATING CONDITIONS

Frequency	f	= 10	30	30	30	MHz
Anode voltage	V_a	= 15	12	10	8	kV
Grid voltage	V_g	= -600	-550	-500	-450	V
Anode current	I_a	= 9.75	9.25	9.0	8.75	A
Grid current	I_g	= 2.2	2.2	2.1	1.85	A
Peak grid driving voltage	V_{gp}	= 1000	940	875	810	V
Grid driving power	W_{dr}	= 2.1	1.9	1.7	1.55	kW
Anode input power	W_{ia}	= 146	111	90	70	kW
Anode dissipation	W_a	= 26	21	18	15	kW
Output power	W_o	= 120	90	72	55	kW
Efficiency	η	= 82	81	80	78.5	%

R.F. CLASS B AMPLIFIER

LIMITING VALUES (Absolute limits)

Frequency	f	up to 10	up to 30	MHz
Anode voltage	V_a	= max. 16	max. 12.5	kV
Anode dissipation	W_a	= max. 45	max. 45	kW
Negative grid voltage	$-V_g$	= max. 1000	max. 1000	V
Grid dissipation	W_g	= max. 1.3	max. 1.3	kW
Anode current	I_a	= max. 13	max. 13	A
Grid current	I_g	= max. 3.3	max. 3.3	A

OPERATING CONDITIONS

Frequency	f	= 10	10	30	30	MHz
Anode voltage	V_a	= 15	15	12	12	kV
Grid voltage	V_g	= -260	-260	-210	-210	V
Anode current	I_a	= 10.1	7.75	12.7	9.85	A
Grid current	I_g	= 2.0	1.3	3.0	1.9	A
Peak grid driving voltage	V_{gp}	= 600	520	650	520	V
Grid driving power	W_{dr}	= 1080	610	1770	880	W
Anode input power	W_{i_a}	= 151	116.3	153	118	kW
Anode dissipation	W_a	= 41	31.3	43	33	kW
Output power	W_o	= 110	85	110	85	kW
Efficiency	η	= 73	73	72	72	%

R.F. CLASS C ANODE MODULATION

LIMITING VALUES (Absolute limits)

Frequency	f	up to	30	MHz
Anode voltage	V_a	= max.	11.5	kV
Anode dissipation	W_a	= max.	30	kW
Negative grid voltage	$-V_g$	= max.	1000	V
Grid dissipation	W_g	= max.	1.3	kW
Anode current	I_a	= max.	9	A
Grid current	I_g	= max.	3.3	A

OPERATING CONDITIONS

Frequency	f	=	30	30	MHz
Anode voltage	V_a	=	11	10	kV
Grid voltage	V_g	=	-480	-440	V ¹⁾
Anode current	I_a	=	7.6	6.9	A
Grid current	I_g	=	3.1	3.1	A
Grid resistor	R_g	=	90	80	Ω
Peak grid driving voltage	V_{gp}	=	880	810	V
Grid driving power	W_{dr}	=	2.7	2.4	kW
Anode input power	W_{i_a}	=	83.6	69	kW
Anode dissipation	W_a	=	17.6	14	kW
Output power	W_o	=	66	55	kW
Efficiency	η	=	79	79	%
Modulation depth	m	=	100	100	%
Modulation power	W_{mod}	=	41.8	34.5	kW

¹⁾ Partially obtained by the grid resistor and grid current.



A.F. CLASS B AMPLIFIER AND MODULATOR



LIMITING VALUES (Absolute limits)

Anode voltage	V_a	= max.	12	kV
Anode dissipation	W_a	= max.	45	kW
Negative grid voltage	$-V_g$	= max.	1000	V
Grid dissipation	W_g	= max.	1.3	kW
Anode current	I_a	= max.	13	A
Grid current	I_g	= max.	3.3	A

OPERATING CONDITIONS (two tubes in push-pull)

Anode voltage	V_a	=	12	10	kV
Grid voltage	V_g	=	-205	-170	V
Load resistance	$R_{aa\sim}$	=	2720	1810	Ω
Peak grid driving voltage	V_{ggp}	=	0 710	0 710	V
Anode current	I_a	=	2x0.4 2x4.75	2x0.4 2x5.75	A
Average grid current	I_g	=	0 2x0.45	0 2x0.72	A
Peak grid current	I_{gp}	=	0 2x2.9	0 2x4.0	A
Grid driving power	W_{dr}	=	0 2x150	0 2x235	W
Anode input power	W_{ia}	=	2x4.0 2x57	2x4.0 2x57.5	kW
Anode dissipation	W_a	=	2x4.0 2x18	2x4.0 2x18.5	kW
Output power	W_o	=	0 78	0 78	kW
Efficiency	η	=	- 68.5	- 68	%

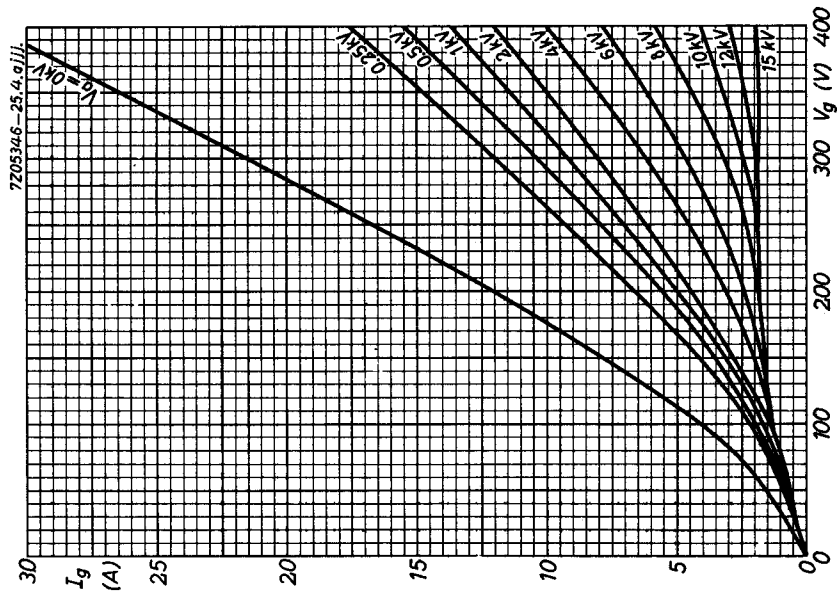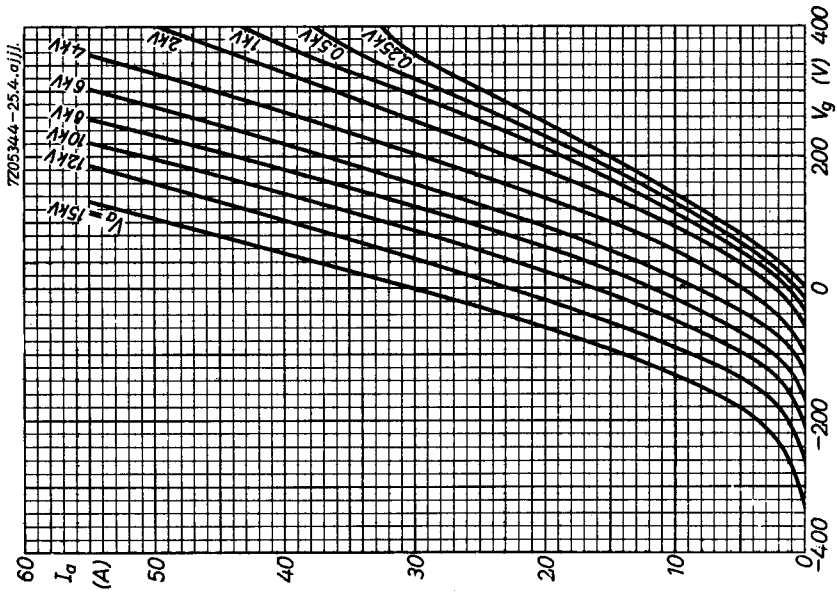

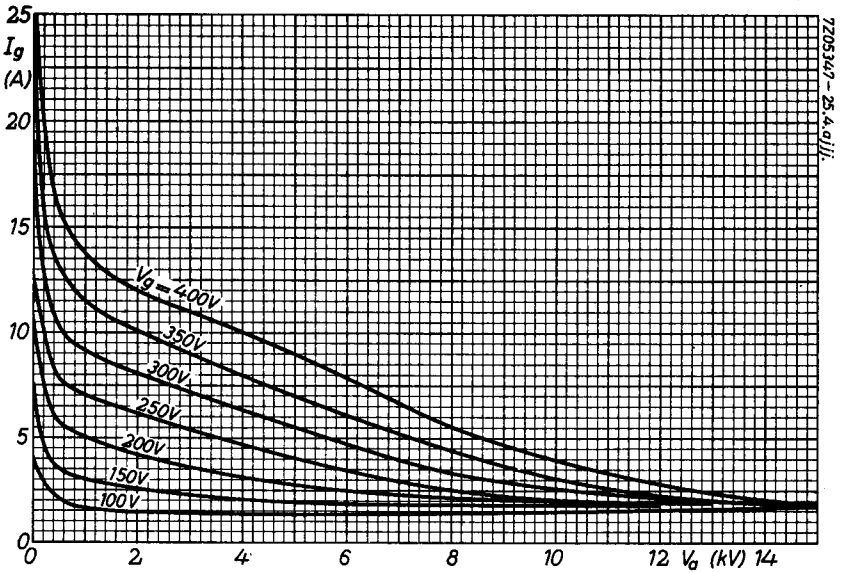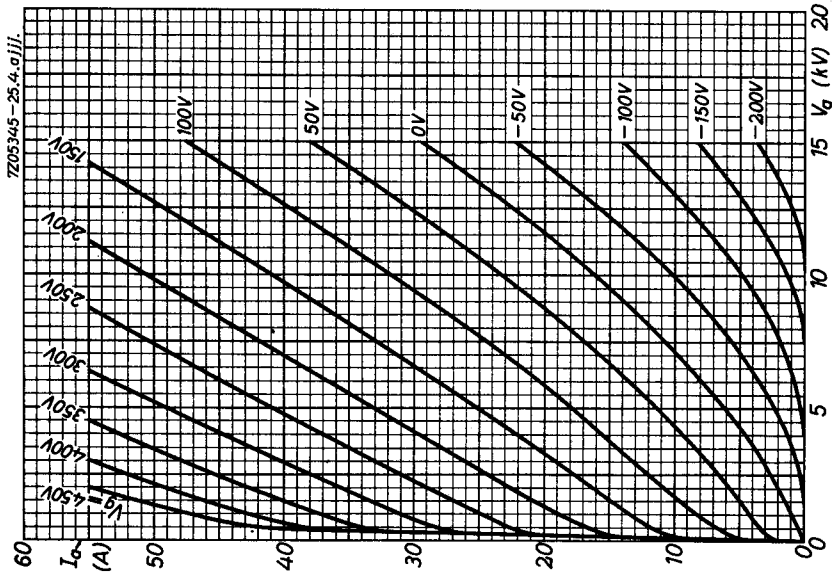

7Z05348-25.4.ajjj.

