





**MINIATURE  
OUTPUT PENTODES  
1.4/2.8V DIRECTLY HEATED**

**N18  
N19**  
OCTOBER, 1951

**BASE CONNECTIONS AND VALVE DIMENSIONS**



N18



N19

View from underside  
of bases.

Base : B7G  
Bulb : Tubular.

Overall length : 49—55 mm.  
Seated length : 43—49 mm.  
Max. diameter : 19 mm.

**RATING**

	Series	Parallel	
$V_f$	2.8	1.4	V
$I_f$	0.05 approx.	0.1 approx.	A
$V_a$	90 max.	90 max.	V
$V_{g2}$	90 max.	90 max.	V
* $I_k$	6 max.	6 max.	mA

\*For each 1.4 volt filament section.

**CAPACITANCES** (of cold unscreened valve)

$c_a$ —all 5.3 pF       $c_{g1}$ —all 5.6 pF       $c_a$ — $g_1$  0.35 pF

**TYPICAL OPERATION**

**Pentode connection :**

	Series		Parallel	
$V_a$	90	85	90	V
$V_{g2}$	90	85	90	V
$V_{g1}$	-4.5	-5	-4.5	V
$v_{in}$ (pk)	4.5	5	4.5	V
$I_a$ (o)	7.7	6.9	9.5	mA
$I_{g2}$ (o)	1.7	1.5	2.1	mA
$r_a$	0.12	0.12	0.1	MΩ
$g_m$	2	1.9	2.1	mA/V
$R_a$	10	10	10	kΩ
D	7	10	7	%
$P_{out}$ (max. sig.)	240	250	270	mW

**MARCONI'S WIRELESS TELEGRAPH COMPANY LIMITED**

Head Office : Marconi House, Chelmsford · Telephone : Chelmsford 3221 · Telegraphic Address : Expanse, Chelmsford

# N18

# N19

## **FILAMENT OPERATION**

For parallel operation, pins 1 and 7 should be positive and pin 5 negative.

When operating the filament from a mains supply, the voltage should be adjusted to 1.3 per filament section or the current to 47.5 mA mean. Under certain conditions, particularly when series operated, a suitable shunt resistor will be required.

## **SCREENING**

No internal or external screening is fitted to the valve.

## **MOUNTING**

Any position.

## **RETAINING**


A retaining device should be used.

## **VENTILATION**

No special precautions.

## **MICROPHONY**

Although this is of a very low order, equipment should be designed to minimise microphony.

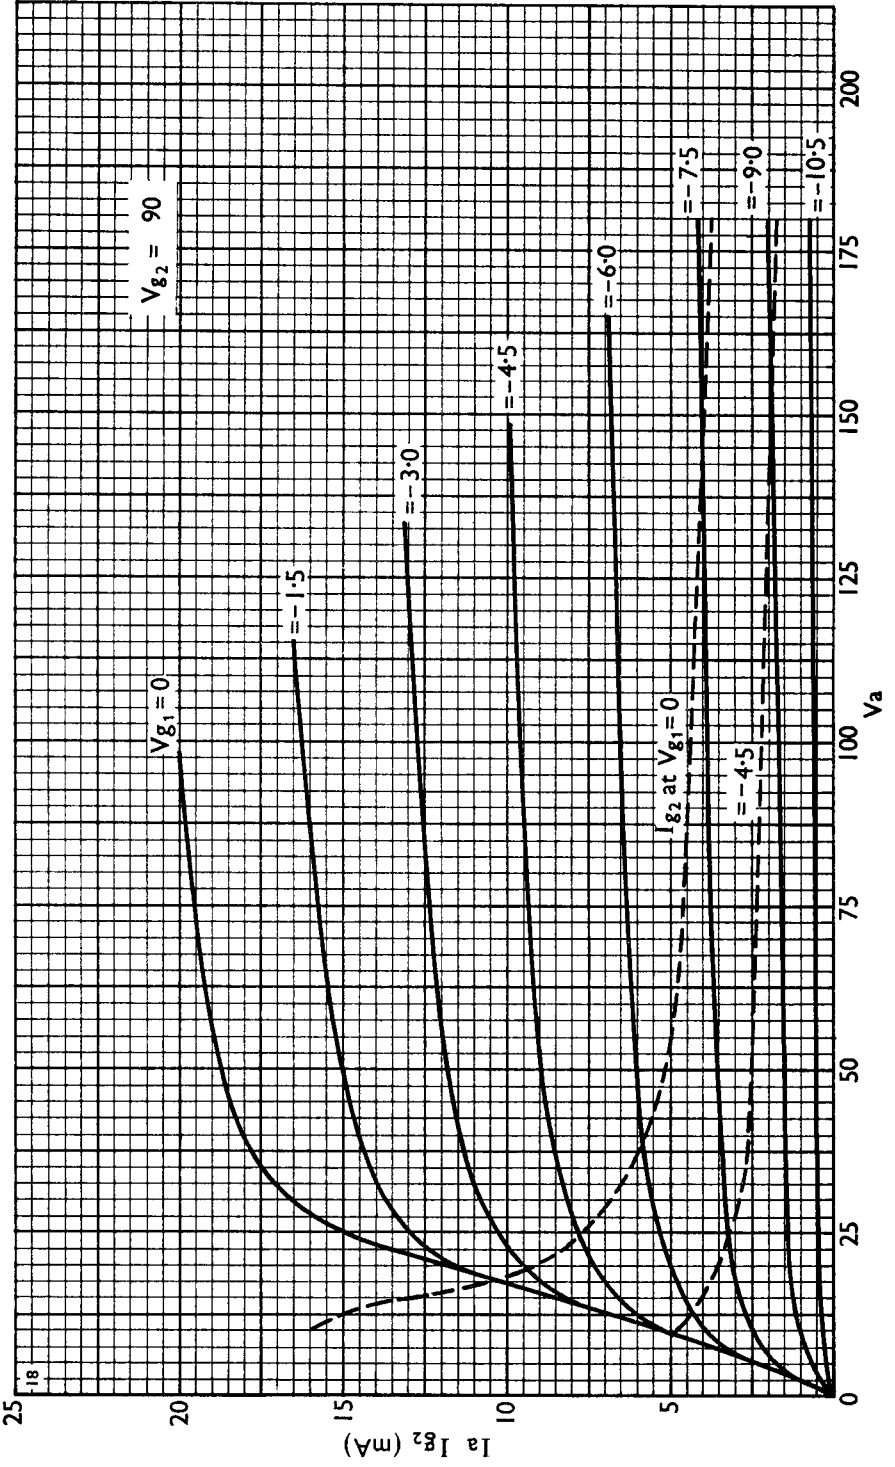

N18

N19

