



5696

THYRATRON

GAS-TETRODE, MINIATURE TYPE

5696

GENERAL DATA

Electrical:

Heater, for Unipotential Cathode:

Voltage	6.3	ac or dc volts
Current	0.150	amp

Cathode:

Minimum Heating Time, prior to tube conduction	10	sec
--	--------------	-----

Direct Interelectrode Capacitances (Approx.):^o

Grid No.1 to Anode	0.03	μ mf
Input	1.8	μ mf
Output	0.54	μ mf

Ionization Time (Approx.):

For conditions: dc anode volts = 100; grid-No.1 square-pulse volts = +50; peak cathode amperes during conduction = 0.150	0.5	μ sec
--	---------------	-----------

Deionization Time (Approx.):

For conditions: dc anode volts = 500; grid-No.1 volts = -100, grid-No.1 resistor (ohms) = 1000; dc cathode amperes = 0.025	25	μ sec
--	--------------	-----------

For conditions: dc anode volts = 500; grid-No.1 volts = -13; grid-No.1 resistor (ohms) = 1000; dc cathode amperes = 0.025	40	μ sec
---	--------------	-----------

Maximum Critical Grid-No.1 Current, with ac

anode-supply volts (rms) = 350, and average cathode amperes = 0.025	0.5	μ amp
---	---------------	-----------

Anode Voltage Drop (Approx.) 10 volts

Grid-No.1 Control Ratio (Approx.) with grid-No.1 resistor (megohms) = 0; grid-No.2 volts = 0 250

Grid-No.2 Control Ratio (Approx.) with grid-No.1 volts = 0, grid-No.2 resistor (ohms) = 0 15

^o Without external shield.

Mechanical:

Mounting Position Any

Maximum Overall Length 1-3/4"

Maximum Seated Length 1-1/2"

Length, Base Seat to Bulb Top (excluding tip). 1-1/8" \pm 3/32"

Maximum Diameter 3/4"

Bulb T-5-1/2

Base Small-Button Miniature 7-Pin

Basing Designation for BOTTOM VIEW 7BN

Pin 1-Grid No.1 Pin 5-Grid No.2

Pin 2-Cathode Pin 6-Anode

Pin 3-Heater Pin 7-Grid No.2

Pin 4-Heater





THYRATRON

RELAY and GRID-CONTROLLED RECTIFIER SERVICE

Maximum Ratings, Absolute Values:

PEAK ANODE VOLTAGE:		
Forward.	500 max.	volts
Inverse.	500 max.	volts
GRID-No.2 (SHIELD-GRID) VOLTAGE:		
Peak, before anode conduction.	-50 max.	volts
Average, during anode conduction [■]	-10 max.	volts
GRID-No.1 (CONTROL-GRID) VOLTAGE:		
Peak, before anode conduction.	-100 max.	volts
Average, during anode conduction [■]	-10 max.	volts
CATHODE CURRENT:		
Peak	0.1 max.	amp
Average [■]	0.025 max.	amp
Surge, for duration of 0.1 sec. max.	2 max.	amp
GRID-No.2 CURRENT:		
Average [■]	+0.005 max.	amp
GRID-No.1 CURRENT:		
Average [■]	+0.005 max.	amp
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode	100 max.	volts
Heater positive with respect to cathode	25 max.	volts
AMBIENT TEMPERATURE RANGE.	-55 to +90	°C

Typical Operating Conditions for Relay Service:

RMS Anode Voltage.	117	volts
Grid No.2.	Connected to cathode at	socket
RMS Grid-No.1 Bias Voltage [□]	5	volts
Peak Grid-No.1 Signal Voltage.	5	volts
Grid-No.1-Circuit Resistance	0.1	megohm
Anode-Circuit Resistance [#]	5000	ohms

Maximum Circuit Values:

Grid-No.1-Circuit Resistance	10 max.	megohms
--	---------	---------

■ Averaged over any interval of 30 sec. max.

□ Approximately 180° out of phase with the anode voltage.


Sufficient resistance, including the tube load, must be used under any conditions of operation to prevent exceeding the current ratings.



5696

5696

AVERAGE CONTROL CHARACTERISTICS

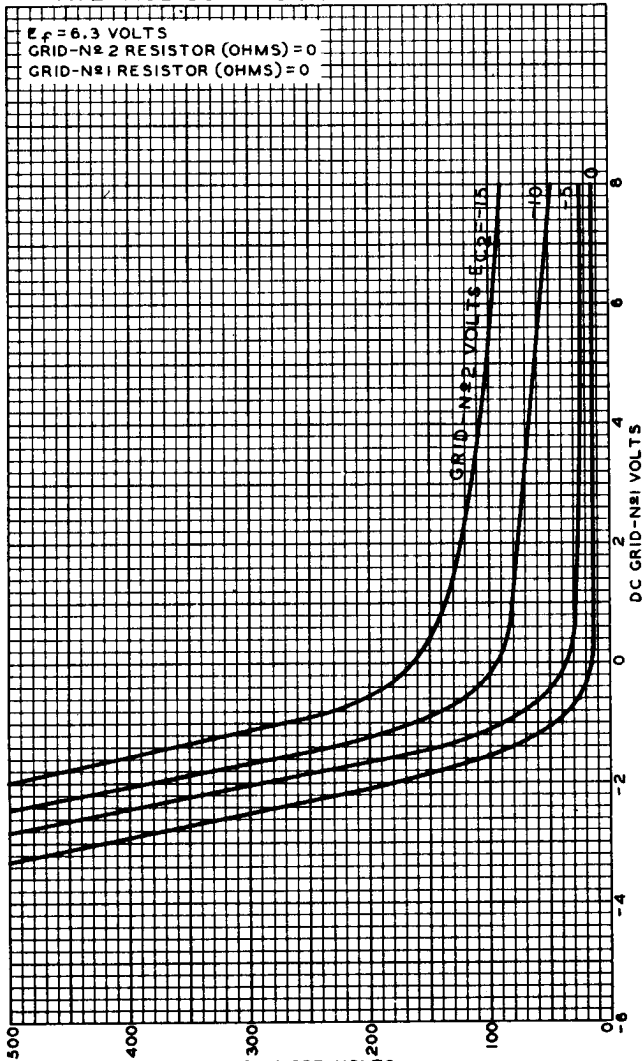

AUG. 6, 1948

DC ANODE VOLTS
TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-7044

5696




5696

THYRATRON

OPERATIONAL RANGE OF CRITICAL GRID VOLTAGE

TYPE 5696

GRID-N#2 (SHIELD) VOLTS=0
 RANGES SHOWN ARE FOR TWO VALUES
 OF GRID RESISTOR—0.1 MEG. AND 10
 MEG.—AND TAKE INTO ACCOUNT INITIAL
 DIFFERENCES BETWEEN INDIVIDUAL
 TUBES & SUBSEQUENT DIFFERENCES
 DURING TUBE LIFE, FOR A HEATER-
 VOLTAGE RANGE OF 5.7 TO 6.9 VOLTS
 AND FOR AN AMBIENT TEMPERATURE
 RANGE OF -55 TO +90°C


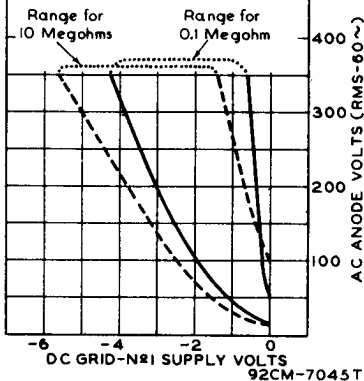




5696

5696

THYRATRON

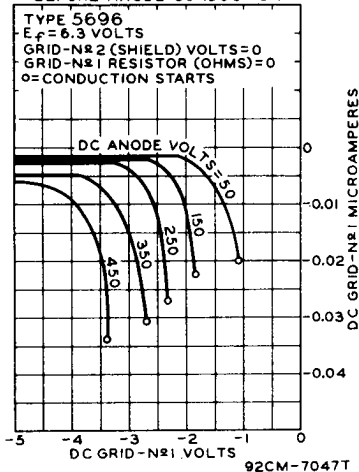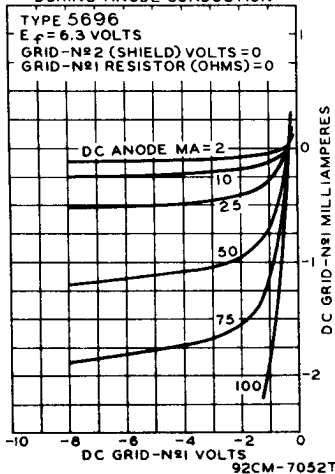AVERAGE CHARACTERISTICS
BEFORE ANODE CONDUCTIONAVERAGE CHARACTERISTICS
DURING ANODE CONDUCTION

FEB. 1, 1949

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

CE-7047T - 7052T