



7263 VIDICON

7263

LOW-POWER (0.6-WATT) HEATER 600-LINE RESOLUTION

For use under severe shock and vibration, high humidity, and altitudes up to 50,000 feet in small, compact, transistorized TV cameras

DATA

General:

Heater, for Unipotential Cathode:

Voltage 6.3 ± 10% ac or dc volts
Current 0.095 amp

Direct Interelectrode Capacitance: ↓

Target to all other electrodes 4.6 μuf

Spectral Response See Curves

Photoconductive Layer:

Maximum useful diagonal of rectangular image (4 x 3 aspect ratio) 0.62"

Orientation of quality rectangle—Proper orientation is obtained when the horizontal scan is essentially parallel to the plane passing through the tube axis and short index pin.

Focusing Method Magnetic

Deflection Method Magnetic

Overall Length 5.12" ± 0.06"

Greatest Diameter 1.125" ± 0.010"

Weight (Approx.) 2 oz

Operating Position Any

Bulb T8

Base Connector Cinch No. 54A1808B, or equivalent

Base Small-Button Ditetrar 8-Pin (JEDEC No. E8-11)

Basing Designation for BOTTOM VIEW 8HM

Pin 1 - Heater

Pin 2 - Grid No. 1


Pin 3 - Internal

Connection—
Do Not Use

Pin 4 - Same as Pin 3

Pin 5 - Grid No. 2

Pin 6 - Grid No. 4,
Grid No. 3



DIRECTION OF LIGHT:
INTO FACE END OF TUBE

Pin 7 - Cathode

Pin 8 - Heater

Flange - Target

Short Index Pin -
Same as
Pin 3

Maximum Ratings, Absolute-Maximum Values:

For altitudes up to 50,000 feet and scanned area of 1/2" x 3/8"

GRID-No. 3 & GRID-No. 4 VOLTAGE 350 max. volts

GRID-No. 2 VOLTAGE 350 max. volts

GRID-No. 1 VOLTAGE:

Negative-bias value 125 max. volts

Positive-bias value 0 max. volts

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode . . 125 max. volts

Heater positive with respect to cathode . . 10 max. volts

↓: See next page.



VIDICON

| | | |
|--|-----------|--------------|
| DARK CURRENT | 0.25 max. | μ a |
| PEAK TARGET CURRENT | 0.55 max. | μ a |
| FACEPLATE: | | |
| Illumination | 1000 max. | ft-c |
| Temperature (Operating or storage) | 60 max. | $^{\circ}$ C |

Typical Operation:

*For scanned area of 1/2" x 3/8" and
faceplate temperature of 30 $^{\circ}$ to 35 $^{\circ}$ C*

| | | |
|---|-------------------------|---------|
| Grid-No.4 (Decelerator) & Grid-No.3 (Beam-Focus- Electrode*) Voltage | 250 $^{\square}$ to 300 | volts |
| Grid-No.2 (Accelerator) Voltage | 300 | volts |
| Grid-No.1 Voltage for picture cutoff $^{\circ}$ | -45 to -100 | volts |
| Average "Gamma" of Transfer Characteristic for signal- output current between 0.02 μ a and 0.2 μ a | 0.65 | |
| Visual Equivalent Signal-to- Noise Ratio (Approx.) $^{\circ}$ | 300:1 | |
| Minimum Peak-to-Peak Blanking Voltage: | | |
| When applied to grid No.1 | 75 | volts |
| When applied to cathode | 20 | volts |
| Field Strength at Center of Focusing Coil (Approx.) | 40 | gausses |
| Field Strength of Adjustable Alignment Coil $^{\circ}$ | 0 to 4 | gausses |

Maximum-Sensitivity Operation for Live-Scene Pickup

| | | |
|--|-------------|---------|
| Faceplate Illumination (Highlight) | 2 | ft-c |
| Maximum Target Voltage required to produce dark current of 0.2 μ a in any tube** | 110 | volts |
| Target Voltage † | 60 to 100 | volts |
| Dark Current $^{\Delta}$ | 0.2 | μ a |
| Target Current (Highlight) $^{\blacksquare}$ | 0.4 to 0.5 | μ a |
| Signal-Output Current: $^{\#}$ | | |
| Peak | 0.2 to 0.3 | μ a |
| Average | 0.08 to 0.1 | μ a |

Average-Sensitivity Operation for Live-Scene Pickup

| | | |
|---|------------|---------|
| Faceplate Illumination (Highlight) | 15 | ft-c |
| Maximum Target Voltage required to produce dark current of 0.02 μ a in any tube** | 60 | volts |
| Target Voltage † | 30 to 50 | volts |
| Dark Current | 0.02 | μ a |
| Target Current (Highlight) $^{\blacksquare}$ | 0.3 to 0.4 | μ a |

\diamond * \square \circ \oplus ** \dagger Δ \blacksquare $\#$: See next page.



7263

VIDICON

7263

| | | |
|--|------------|---------|
| Signal-Output Current:* | | |
| Peak | 0.3 to 0.4 | μ a |
| Average | 0.1 to 0.2 | μ a |
| <i>Minimum-Lag Operation for Film Pickup</i> | | |
| Faceplate Illumination (Highlight). | 100 | ft-c |
| Maximum Target Voltage required to produce dark current of 0.004 μ a in any tube** | 30 | volts |
| Target Voltage† | 15 to 25 | volts |
| Dark Current | 0.004 | μ a |
| Target Current (Highlight)‡ | 0.3 to 0.4 | μ a |
| Signal-Output Current:* | | |
| Peak | 0.3 to 0.4 | μ a |
| Average | 0.1 to 0.2 | μ a |

- This capacitance, which effectively is the output impedance of the 7263, is increased when the tube is mounted in the deflecting-yoke and focusing-coil assembly. The resistive component of the output impedance is in the order of 100 megohms.
- * Beam focus is obtained by combined effect of grid-No.3 voltage which should be adjustable over indicated range, and a focusing coil having an average field strength of 40 gausses.
- Definition, focus uniformity, and picture quality decrease with decreasing grid-No.4 and grid-No.3 voltage. In general, grid No.4 and grid No.3 should be operated above 250 volts.
- With no blanking voltage on grid No.1.
- Measured with high-gain, low-noise, cascode-input-type amplifier having bandwidth of 5 Mc. Because the noise in such a system is predominately of the high-frequency type, the visual equivalent signal-to-noise ratio is taken as the ratio of highlight video-signal current to rms noise current, multiplied by a factor of 3.
- The alignment coil should be located on the tube so that its center is at a distance of 3-11/16 inches from the face of the tube, and be positioned so that its axis is coincident with the axis of the tube, the deflecting yoke, and the focusing coil.
- ** The target voltage for each 7263 must be adjusted to that value which gives the desired operating dark current.
- † Indicated range for each type of service serves only to illustrate the operating target-voltage range normally encountered.
- ▲ The deflecting circuits must provide extremely linear scanning for good black-level reproduction. Dark-current signal is proportional to the scanning velocity. Any change in scanning velocity produces a black-level error in direct proportion to the change in scanning velocity.
- Video amplifiers must be designed properly to handle target currents of this magnitude to avoid amplifier overload or picture distortion.
- # Defined as the component of the target current after the dark-current component has been subtracted.

SPECIAL PERFORMANCE DATA

In connection with the following tests, sample 7263's will maintain resolution as determined with a RETMA Resolution Chart, or equivalent, and will faithfully reproduce all resolution wedges and grey scales of the chart.

Vibration Tests:

These tests are performed under conditions for *Average-Sensitivity Operation for Live-Scene Pickup* on a sample lot



VIDICON

of tubes from each production run. Tubes and their associated components§ are vibrated on apparatus providing dynamic conditions similar to those described in MIL-E-5272B♦, paragraph 4.7.1.

Resonance. Tubes and associated components§ are vibrated (per the method of MIL-E-5272B♦, paragraph 4.7.1.1) for 1 hour at +25° C, for 15 minutes at 0° C, and for 15 minutes at +55° C.

Cycling. Tubes and associated components§ are vibrated (per the method of MIL-E-5272B♦, paragraph 4.7.1.2 pertaining to specimen without vibration isolators) for 1 hour at +25° C, for 15 minutes at 0° C, and for 15 minutes at +55° C.

Temperature-Pressure (Altitude) Tests:

Tubes and associated components§ are subjected (per the method of MIL-E-5400* paragraph 3.2.20, 3.2.20.1, and 3.2.20.1.1) to the separate and combined effects of varying temperature 0° to +55° C and varying barometric pressure 30 to 3.4 inches of mercury. The pressures correspond to sea level and to an altitude of 50,000 feet, respectively.

Shock Tests:

These tests are performed with no voltages applied and on a sample lot of tubes from each production run. Tubes and their associated components§ are subjected in these tests (per MIL-E-5400*, paragraph 3.2.21.2.1) to 18 impact shocks of 15 g consisting of 3 shocks in opposite directions along each of three mutually perpendicular axes of the tube. Each shock impulse has a duration of 11 ± 1 milliseconds with a maximum impact acceleration occurring at approximately 5.5 milliseconds.

Temperature-Humidity Tests:

These tests are performed with no voltages applied to the 7263. The 7263 and associated components§ are subjected (per the method of MIL-E-5400*, paragraph 3.2.20.2B) to relative humidities up to and including 100 per cent at temperatures up to and including +50° C.

§ Tube socket such as Clinch No. 54A18088 and RCA Assembly No. 200SDU501, or equivalent, which consists of the deflecting coils, focusing coil, alignment coil, shield, and target connector.

♦ 5 June 1957, Procedure I of Military Specification.

* 1 January 1956.

OPERATING CONSIDERATIONS

The *target connection* is made by a suitable spring contact bearing against the edge of the target flange. This spring contact may conveniently be provided as part of the focusing-coil design.

Support for the 7263 should be provided such that, under vibration and shock, the tube will not be displaced with respect




7263

VIDICON

7263

to the focusing, deflecting, and alignment fields. Suitable support is provided for the tube and its socket in the RCA Deflection Assembly 200SDU501, or equivalent. Orientation of the 7263 in its support should be such that the horizontal scan is essentially parallel to the plane passing through the tube axis and short index pin.

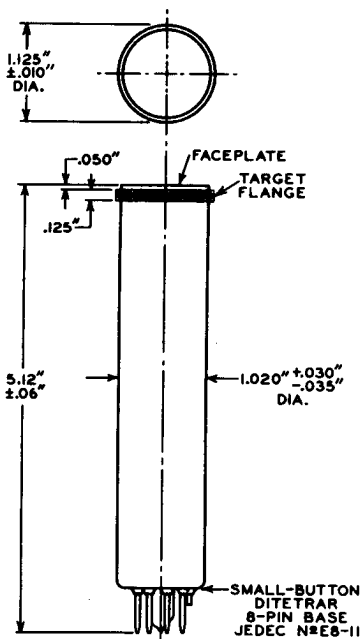


92CS-9885

7263




7263

TYPICAL LIGHT-TRANSFER CHARACTERISTICS

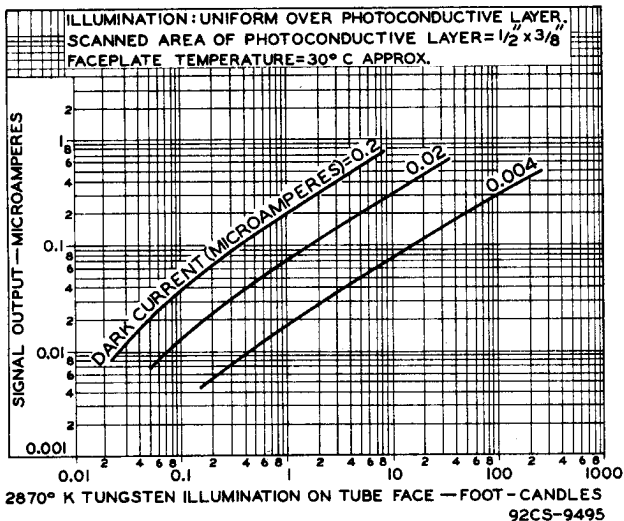

TYPICAL PERSISTENCE CHARACTERISTIC

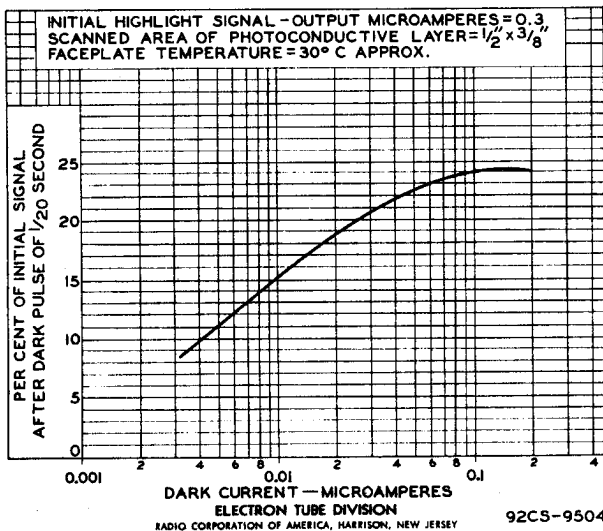




7263

7263

TYPICAL PERSISTENCE CHARACTERISTICS

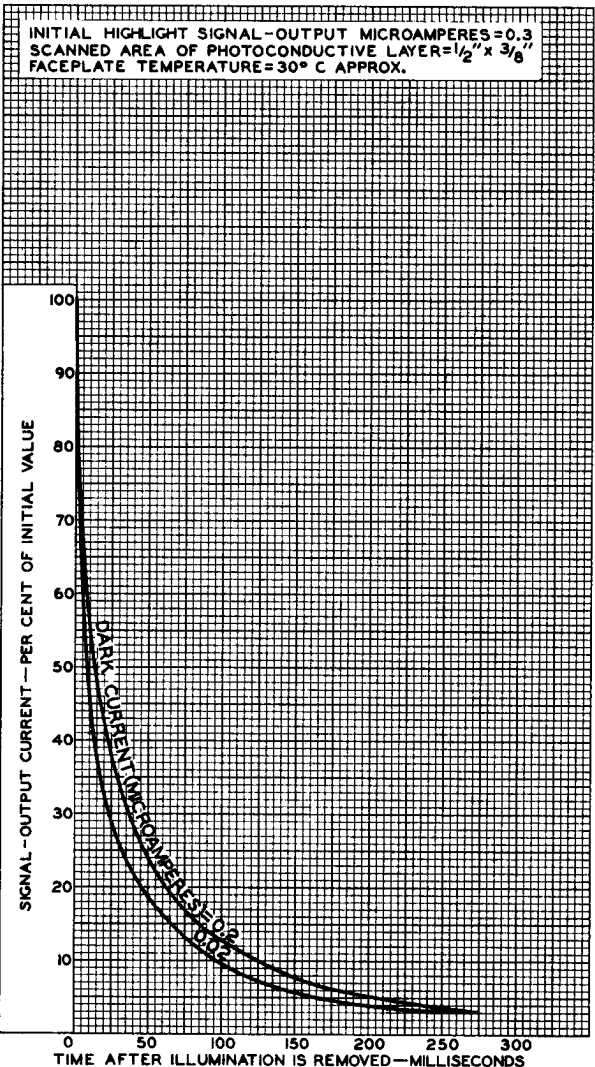



7263


SPECTRAL-SENSITIVITY CHARACTERISTICS

CURVE A: FOR EQUAL VALUES OF SIGNAL-
OUTPUT CURRENT AT ALL WAVELENGTHS.

SIGNAL-OUTPUT MICROAMPERES FROM
SCANNED AREA OF $\frac{1}{2}'' \times \frac{3}{8}'' = 0.02$
DARK CURRENT (MICROAMPERES) = 0.02

CURVE B: SPECTRAL CHARACTERISTIC OF
AVERAGE HUMAN EYE.

CURVE C: FOR EQUAL VALUES OF SIGNAL-
OUTPUT CURRENT WITH RADIANT
FLUX FROM TUNGSTEN SOURCE
AT 2870° K.

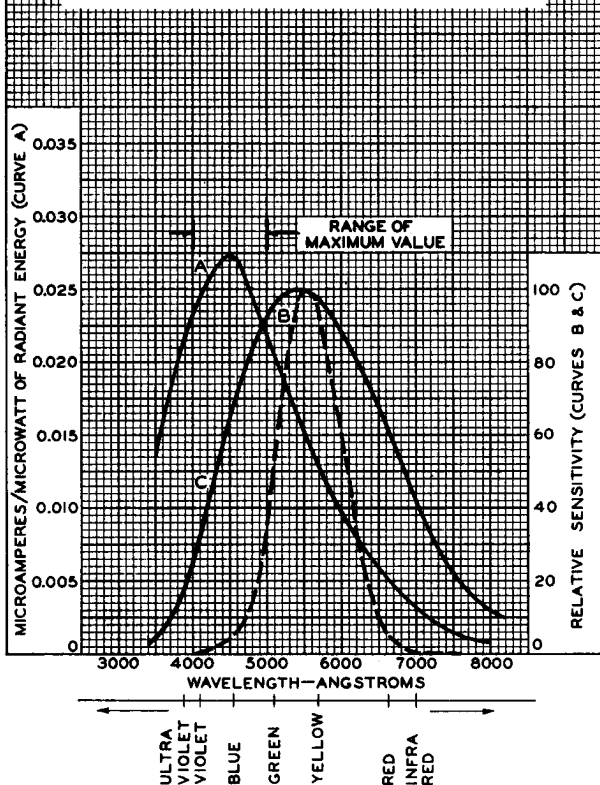




7263

7263

TYPICAL CHARACTERISTICS

HIGHLIGHT SIGNAL - OUTPUT MICROAMPERES = 0.2
 DARK CURRENT (MICROAMPERES) = 0.2
 SCANNED AREA OF PHOTOCONDUCTIVE LAYER = $1\frac{1}{2}'' \times 3\frac{3}{8}''$
 CURVE A: RELATIVE TARGET VOLTAGE REQUIRED TO MAINTAIN DARK CURRENT OF $0.2 \mu\text{A}$.
 CURVE B: 2870° K INCANDESCENT ILLUMINATION REQUIRED TO PRODUCE SIGNAL - OUTPUT CURRENT OF $0.2 \mu\text{A}$.
 CURVE C: PERSISTENCE (LAG) CHARACTERISTIC FOR AN INITIAL SIGNAL-OUTPUT CURRENT OF $0.2 \mu\text{A}$.

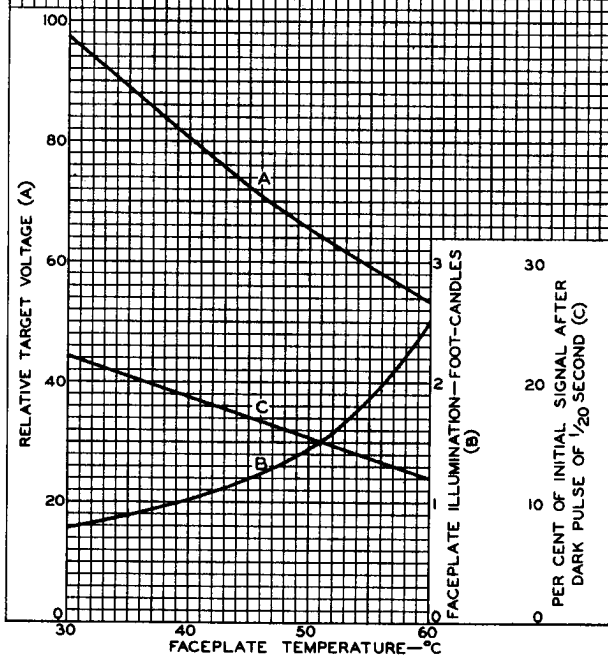

ELECTRON TUBE DIVISION

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-9499


7263



7263

DARK-CURRENT RANGE

SCANNED AREA OF PHOTOCONDUCTIVE LAYER = $1/2 \times 3/8$ "
FACEPLATE TEMPERATURE = 30° C APPROX.

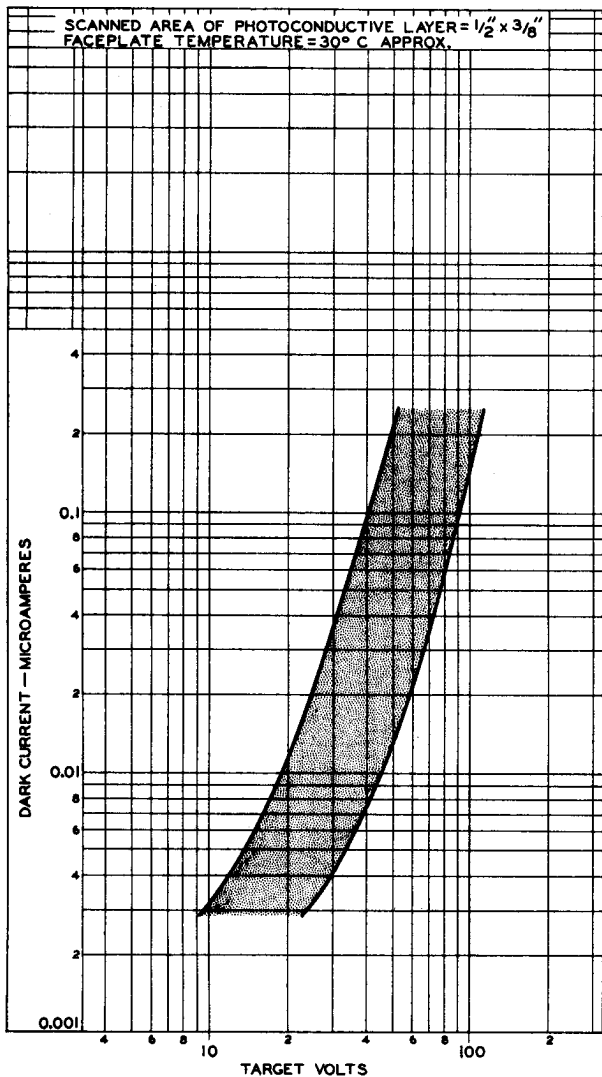

ELECTRON TUBE DIVISION

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


92CM-9497



7263

7263

TYPICAL CHARACTERISTIC

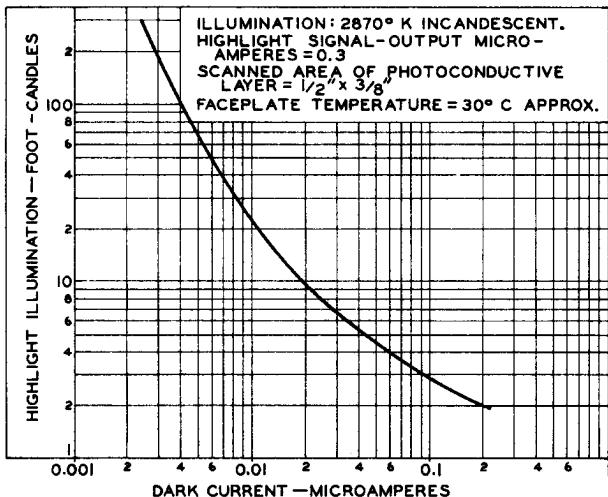

92CS-9493