





T.			U_f	I_f	Cl.	U_a	U_g	I_a	I_g	$U_{g\approx}$	P_{dr}	$R_{a/a}$	P_o	P_a
			V	A		V	V	mA	mA	V	W	k Ω	W	W
800	amer	1	7,5	3,1	C-Tgr	750	-100	70	15	225	2			35
						1000	-135	70	15	260	3		50	
						1250	-175	70	15	300	4		65	
						1250	-400	80	25	maximum ($f = 60$ MHz)			35	
					C-Tlf A-Mod.	750	-150	70	15	275	3		35	
						1000	-200	70	15	325	4		50	
						1000	-400	80	25				23	
					B-Tlf	750	- 40	45	2	160	3,6		10	
						1000	- 55	42	2	170	3,3		14	
						1250		45					35	
					B (\approx) Modul.	750	- 40	$(13 \div 105) \times 2$		160×2	3×2	6,4	90	
						1000	- 55	$(14 \div 80) \times 2$		150×2	$2,2 \times 2$	12,5	100	
1250	- 70	$(15 \div 65) \times 2$		150×2		$1,7 \times 2$	21	106						
1250		115		maximum			35							



C_g	C_a	$C_{g/a}$
pF	pF	pF
2,8	2,8	2,5

Equivalents

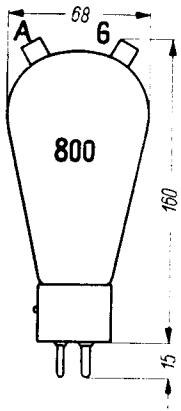C 800	amer
RK 30	Ray



800

