

## High-Mu Triode

## NUVISTOR TYPE

Heater Designed to Operate from Battery Supplies  
Used in Sonobuoy and Other Expendable Equipment

**Electrical:**

Heater Characteristics and Ratings:

Voltage (DC) . . . . Tubes will be supplied with the heater designed to operate within $\pm 10\%$ of any specified center heater voltage between 6.0 and 8.5 volts to meet specific battery-supply requirements in sonobuoy and other expendable equipment.		
Input . . . . .	0.85	watt
Peak heater-cathode voltage:		
Heater negative with respect to cathode . . . . .	100 max.	volts
Heater positive with respect to cathode . . . . .	100 max.	volts
Direct Interelectrode Capacitances (Approx.):		
Grid to plate . . . . .	0.9	pf
Grid to cathode, shell, and heater . . . . .	4.2	pf
Plate to cathode, shell, and heater . . . . .	1.7	pf
Plate to cathode . . . . .	0.22	pf
Heater to cathode . . . . .	1.3	pf

**Characteristics, Class A<sub>1</sub> Amplifier:**

Heater Voltage . . . . .	Specified center value	
Plate Supply Voltage . . . . .	110	volts
Grid . . . . .	Connected to negative end of cathode resistor	
Cathode Resistor . . . . .	150	ohms
Amplification Factor . . . . .	64	
Plate Resistance (Approx.) . . . . .	6800	ohms
Transconductance . . . . .	9400	$\mu\text{mhos}$
Plate Current . . . . .	7	ma
Grid Voltage (Approx.) for plate $\mu\text{a} = 10$ .	-4	volts


**Mechanical:**

Operating Position . . . . .	Any
Type of Cathode . . . . .	Coated Unipotential
Maximum Overall Length . . . . .	0.800"
Maximum Seated Length . . . . .	0.625"
Maximum Diameter . . . . .	0.440"
Weight (Approx.) . . . . .	1.9 grams
Envelope . . . . .	Metal Shell MT4
Socket . . . . .	See <i>Socket &amp; Connector Information</i> for RCA Nuvistor Tubes at front of this Section
Base . . . . .	Medium Ceramic-Wafer Twelvar 5-Pin (JEDEC No. E5-65)



Basing Designation for BOTTOM VIEW. . . . . 12A0

- Pin 1<sup>a</sup> - Do Not Use
- Pin 2 - Plate
- Pin 3<sup>a</sup> - Do Not Use
- Pin 4 - Grid
- Pin 5<sup>a</sup> - Do Not Use
- Pin 6<sup>a</sup> - Do Not Use
- Pin 7<sup>a</sup> - Do Not Use
- Pin 8 - Cathode
- Pin 9<sup>a</sup> - Do Not Use
- Pin 10 - Heater
- Pin 12 - Heater



INDEX=LARGE LUG  
●=SHORT PIN; IC-DO NOT USE

### AMPLIFIER — Class A

#### Maximum Ratings, Absolute-Maximum Values:

For operation at any altitude

	Rating 1	Rating 2 <sup>b</sup>	
Plate Supply Voltage. . . . .	300 max.	300 max.	volts
Plate Voltage . . . . .	250 max.	250 max.	volts
Grid Voltage:			
Negative-bias value . . . . .	55 max.	55 max.	volts
Positive-bias value . . . . .	-	0 max.	volts
Peak-positive value . . . . .	2 max.	-	volts
Cathode Current . . . . .	15 max.	2.5 max.	ma
Plate Dissipation . . . . .	1 max.	0.2 max.	watt

#### Maximum Circuit Values:

	Rating 1	Rating 2 <sup>b</sup>	
Grid-Circuit Resistance:			
For fixed-bias operation . . . . .	0.5 <sup>c</sup> max.	40 max.	megohms
For cathode-bias operation . . . . .	1 <sup>c</sup> max.	40 max.	megohms

<sup>a</sup> Pins 1, 3, 5, 6, 7, and 9 are of a length such that their ends do not touch the socket insertion plane.

<sup>b</sup> For high-reliability, 20-hour-life applications.

<sup>c</sup> For operation at metal-shell temperature of 150° C measured in Zone "A" as shown on *Dimensional Outline*. For operation at other metal-shell temperatures, see *Grid-Circuit-Resistance Rating Chart*.

### CHARACTERISTICS RANGE VALUES

	Note	Min.	Max.	
Heater Current. . . . .	1	0.95 $\left[ \frac{0.85}{E_f(\text{ctr})} \right]$	1.05 $\left[ \frac{0.85}{E_f(\text{ctr})} \right]$	amp
Direct Interelectrode Capacitances:				
Grid to plate . . . . .	2	0.8	1.0	pf
Grid to cathode, shell, and heater . . . . .	2	3.4	5.0	pf



	Note	Min.	Max.	
Plate to cathode, shell, and heater. . . . .	2	1.3	2.1	pf
Plate to cathode . . . . .	2	0.16	0.28	pf
Heater to cathode. . . . .	2	1.0	1.6	pf
Plate Current (1). . . . .	1,3	5.5	8.8	ma
Plate Current (2). . . . .	1,4	-	50	$\mu$ a
Transconductance (1) . . . . .	1,3	7900	10900	$\mu$ hos
Transconductance (2) . . . . .	3,5	6700	-	$\mu$ hos
Reverse Grid Current . . . . .	1,6	-	0.05	$\mu$ a
Amplification Factor . . . . .	1,3	54	74	
Heater-Cathode				
Leakage Current:				
Heater negative with respect to cathode . . . . .	1,7	-	5	$\mu$ a
Heater positive with respect to cathode . . . . .	1,7	-	5	$\mu$ a
Leakage Resistance:				
Between grid and all other electrodes tied together. . . . .	1,8	5000	-	megohms
Between plate and all other electrodes tied together. . . . .	1,9	10000	-	megohms

Note 1: With dc heater volts = specified center value,  $E_p$ (ctr).

Note 2: Measured in accordance with EIA Standard RS-191-A.

Note 3: With dc plate supply volts = 110, grid and metal shell connected to negative end of cathode resistor, cathode resistor (ohms) = 150, and cathode-bypass capacitor ( $\mu$ f) = 1000.

Note 4: With dc plate volts = 110, dc grid volts = -5, and metal shell connected to ground.

Note 5: With dc heater volts = 0.9 specified center value.

Note 6: With dc plate supply volts = 150, dc grid supply volts = -1.7, grid-circuit resistance (megohms)  $\leq 1$  (the internal resistance of the current meter used for this measurement), and metal shell connected to ground.

Note 7: With dc heater-cathode volts = 100.

Note 8: With grid 100 volts negative with respect to all other electrodes tied together.

Note 9: With plate 300 volts negative with respect to all other electrodes tied together.

## SPECIAL TESTS

### Short-Duration Shock (I):

Peak Impact Acceleration . . . . . 1000 g

This test is performed on a sample lot of tubes to determine the ability of the tube to withstand the specified Peak Impact Acceleration. Tubes are held rigid in each of four different positions ( $X_1$ ,  $X_2$ ,  $Y_1$ , and  $Y_2$ ) in a Navy-Type High-Impact (Flyweight) Shock Machine and, with tube-electrode voltages applied, are subjected to 20 blows (5 in each position) at the specified Peak Impact Acceleration.

At the end of this test, tubes are criticized for continuity and Shorts, Transconductance (I), Reverse Grid Current, and Heater-Cathode Leakage Current.



## Long-Duration Shock (2):

Peak Impact Acceleration . . . . . 50 g

This test is performed, using a half-sine-wave, 11-millisecond, mechanical shock pulse, on a sample lot of tubes from each production run to determine the ability of the tube to withstand the specified Peak Impact Acceleration. Tubes are held rigid in each of two positions in three mutually perpendicular axes on a free-fall table. The longitudinal axis of the tube is coincident with one of the three axes. The table is dropped a total of 18 times to a horizontal surface from a height sufficient to produce the specified Peak Impact Acceleration. The material of the horizontal surface is such that the duration of the half-sine-wave shock pulse is 11 milliseconds. No tube-electrode voltages are applied during this test.

At the end of this test, tubes are criticized for Continuity and Shorts, Transconductance (I), Reverse Grid Current, and Heater-Cathode Leakage Current.

## Sweep-Frequency Fatigue Vibration:

This test is performed on a sample lot of tubes from each production run to determine the ability of the tube to withstand the Sweep-Frequency Fatigue Vibration specified below. Tubes are held rigid and operated with dc heater-cathode volts = 100. During operation, the tube is vibrated through the frequency range from 5 to 500 cps and back to 5 cps. One such vibration sweep cycle takes approximately 15 minutes. This cycle is repeated for a period of 3 hours along each of three mutually perpendicular axes for a total of 9 hours. The longitudinal axis of the tube is coincident with one of the three axes. The vibrations are applied as follows:

- a. The vibration from 5 to 50 cps is applied with a constant peak amplitude of 0.040 inch (0.080 inch peak-to-peak).
- b. The vibration from 50 to 500 cps is applied with a constant acceleration of 10 g.
- c. The vibration from 500 to 50 cps and then to 5 cps follows the same procedure, but in reverse.

At the end of this test, tubes are criticized for Continuity and Shorts, Transconductance (I), Reverse Grid Current, and Heater-Cathode Leakage Current.

## Low-Pressure Voltage Breakdown:

This test is performed on a sample lot of tubes from each production run to determine the ability of the tube to withstand high-altitude (low-air-pressure) conditions. Tubes are operated with 250 volts rms (60-cycle, ac) applied between plate and all other electrodes and metal shell connected together. Tubes must not break down or show evidence of corona when subjected to an air pressure ( $8.0 \pm 0.5$  mm Hg) corresponding to an altitude of 100,000 feet.

## Continuity and Shorts:

This test is performed on a sample lot of tubes from each production run. Tubes are subjected to the Thyatron-Type

Shorts Test described in MIL-E-10, Amendment 5, Paragraph 4.7.7, except that tapping is done by hand with a soft rubber tapper (Specifications for this tapper will be supplied upon request). The areas of acceptance and rejection for this test are shown in the accompanying *Shorts-Test Acceptance-Limits* graph. In this test, tubes are criticized for permanent or temporary shorts and open circuits.

### Reliability Life (20 Hours):

This test is performed on a sample size (minimum of 80 tubes/lot for a 5-lot sampling plan or a minimum of 400 tubes for a single-lot sampling plan) designed to assure a process average AFR (Acceptable Failure Rate) of 0.5 per cent for Inoperatives and 2.1 per cent for Total Defectives and a process average RFR (Rejectable Failure Rate) of 2.0 per cent for Inoperatives and 4.7 per cent for Total Defectives.

During this test, tubes are operated at maximum rated plate dissipation (*Rating 2—0.2 watt*).

At the end of this test, tubes are criticized for Change in Transconductance (I), Inoperatives, and Total Defectives. A tube is considered Inoperative if it has a discontinuity, permanent short, or air leak.

### Heater-Cycling Life (100 Hours):

Intermittent Operation . . . . . 2000 cycles

This test is performed on a sample lot of tubes from each production run with heater volts =  $1.35x$  specified center value cycled 1 minute ON and 2 minutes OFF, dc heater-cathode volts = -100, all other tube electrodes and metal shell connected to ground.

At the end of this test, tubes are criticized for Heater-Cathode Leakage Current, Open Heaters, Open Cathode Circuits, and Heater-Cathode Shorts.


### Intermittent Life (100 Hours):

This test is performed on a sample lot of tubes from each production run.

During this test, tubes are operated at maximum rated plate dissipation (*Rating 1—1 watt*).

At the end of this test, tubes are criticized for Transconductance (I), Reverse Grid Current, Inoperatives, and Total Defectives. A tube is considered Inoperative if it has a discontinuity, permanent short, or air leak.




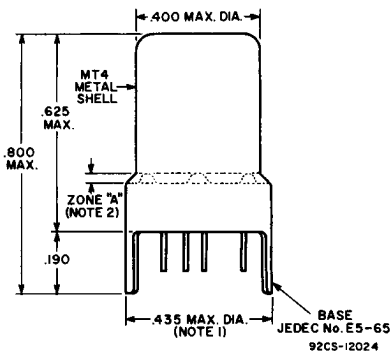

DIMENSIONS IN INCHES


### BOTTOM VIEW

Showing Arrangement of All 11 Base Pins



### MODIFIED BOTTOM VIEW


With Element Connections Indicated and Short Pins Not Shown



**NOTE 1:** MAXIMUM OUTSIDE DIAMETER OF 0.440" IS PERMITTED ALONG 0.190" LUG LENGTH.

**NOTE 2:** METAL-SHELL TEMPERATURE SHOULD BE MEASURED IN ZONE "A".


## AVERAGE PLATE CHARACTERISTICS

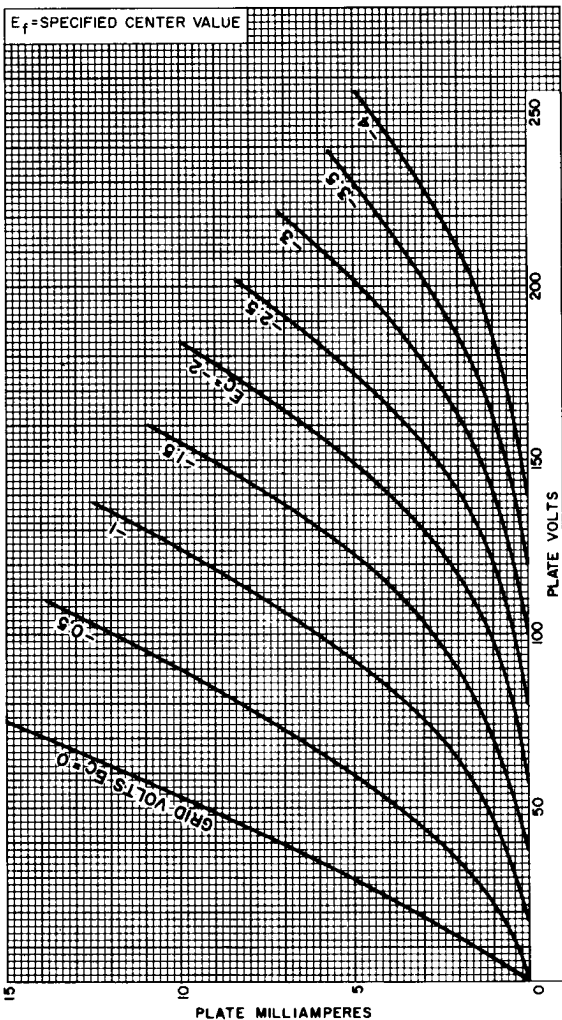

92CM-12170



## AVERAGE CHARACTERISTICS

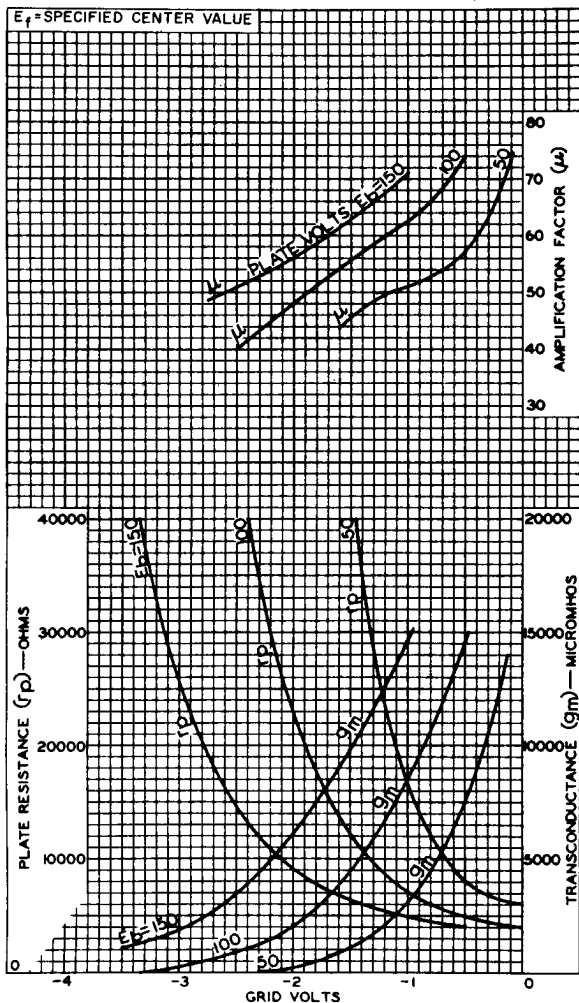


92CM-12168






## GRID-CIRCUIT-RESISTANCE RATING CHART Class A Amplifier—Rating 1

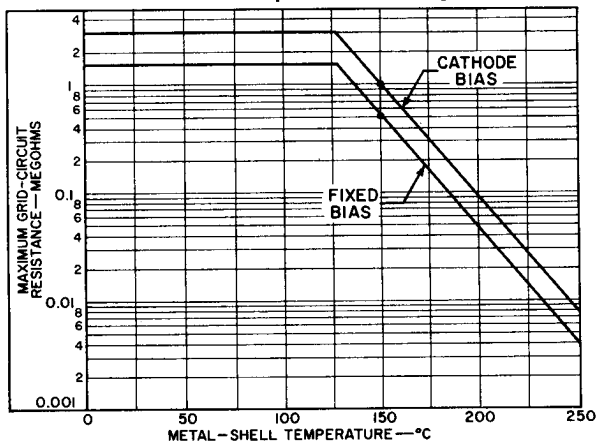

92CS-12023

## SHORTS TEST ACCEPTANCE LIMITS

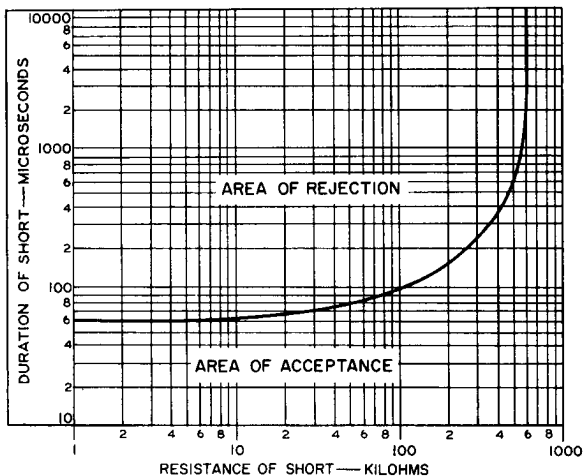

92CS-10465RI

