

FERRANTI

VACUUM HIGH VOLTAGE RECTIFIER

An indirectly heated Half-Wave High Voltage Rectifier.

PHYSICAL DETAILS.

Base	International Octal.
Top Cap	Skirted Miniature—CT1
Max. Overall Length	118 mm. ($4\frac{11}{16}$ in.).
Max. Seated Height	104 mm. ($4\frac{1}{8}$ in.).
Max. Diameter (Base)	33 mm. ($1\frac{1}{8}$ in.).
Mounting Position	Any.

BASE CONNECTIONS.

Pin 1—No Connection.	Pin 5—No Connection.
Pin 2—Heater.	Pin 6—No Connection.
Pin 3—No Connection.	Pin 7—No Connection.
Pin 4—No Connection.	Pin 8—Heater, Cathode.
Top Cap—Anode.	

HEATER.


Heater Voltage	4.0 volts.
Heater Current	1.25 amp.

RATINGS*


Max. P.I.V. (no load)	13.0 kV.
Max. P.I.V. (working)	11.5 kV.
Max. R.M.S. Input Voltage	4.5 kV.
Max. Peak Anode Current	280 mA.
Max. Rectified Current	40 mA.
Max. Reservoir Capacitor	1.0 μ F.
Min. Supply Impedance	4500 ohms.
Min. Switching Delay Time	60 secs.

*The above ratings are "Absolute" and apply to operation at 50 c/s. with a capacitor input and delayed switching.

HR6



Base
Connections
Underside View
of Base

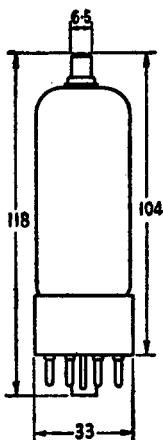

All Dimensions
shown are in
millimetres
(max.).



HR6

