

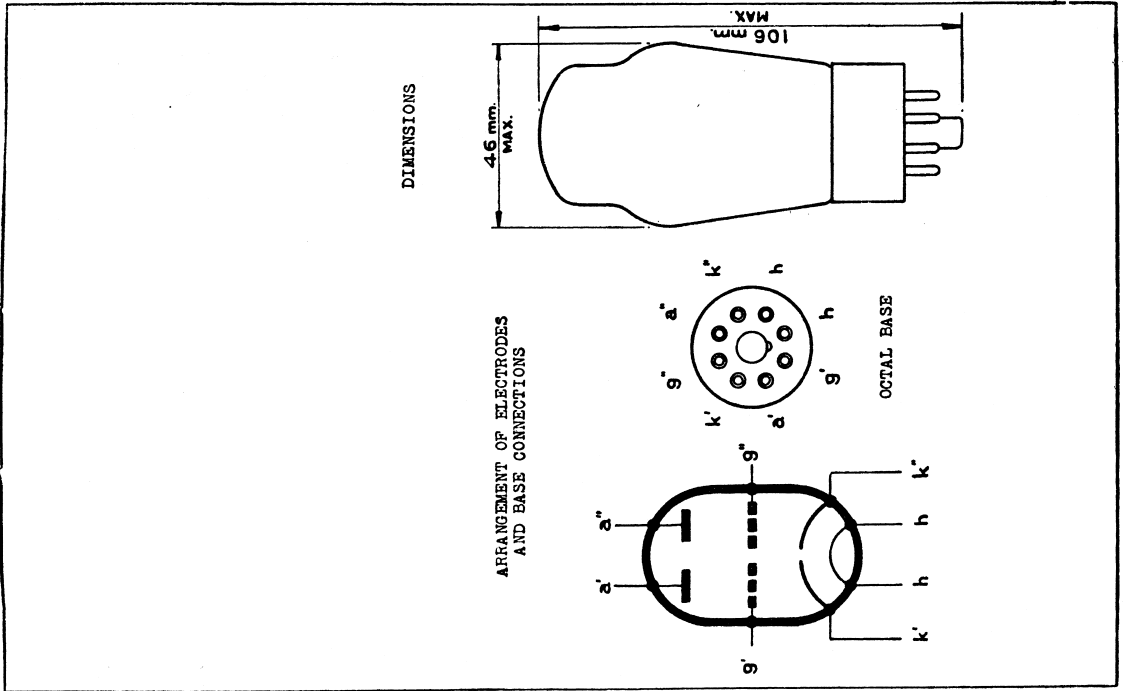


ECC34 TWIN TRIODE (Separate Cathodes)

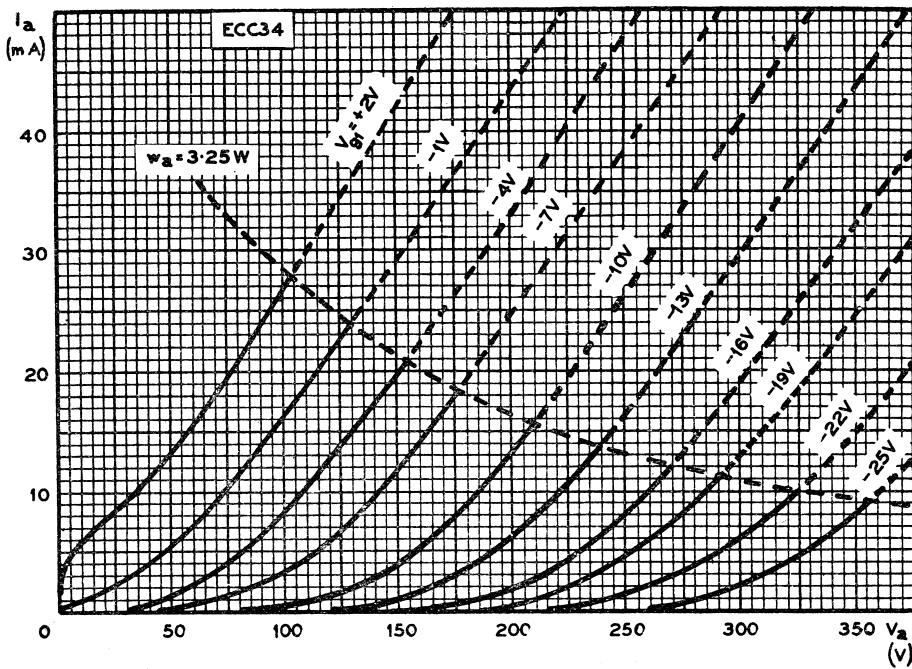

HEATER	V_h	6.3 V
	I_h	0.95 A
CAPACITANCES	C_{a-a}	0.48 μ F
	Each Section	
	C_{g-g}	4.0 μ F
	C_{g-k}	3.5 μ F
	C_{g-k}	1.6 μ F
TYPICAL OPERATING CONDITIONS	V_a	250 V
	I_a	10 mA
	V_g	-16 V
	S_m	2.2 mA/V
	r_a	5,200 ohms
	μ	11.5
LIMITING VALUES	V_a (b) max.	550 V
	V_a max.	300 V
	W_a max.	3.25 W
	I_k max.	50 mA
	V_h -k max.	50 V
	R_{h-k} max.	20,000 ohms
	R_{g1} max.	2.0 M. ohms

ECC34
(Continued)

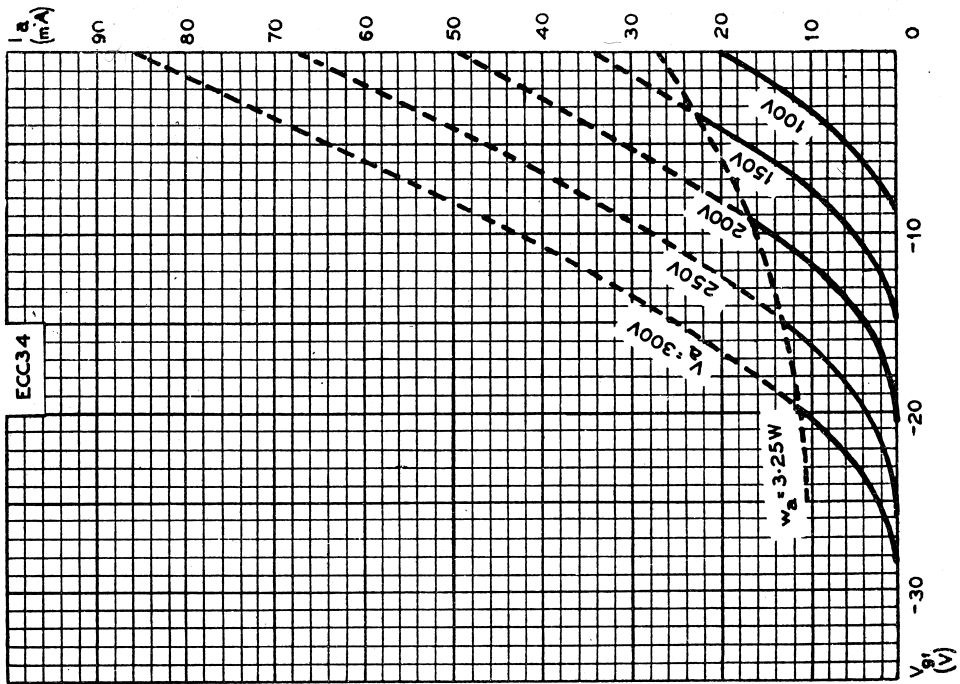

PHILIPS RADIO and TELEVISION MANUAL

Compiled by
E. G. BEARD, S.M.I.R.E., (Aust.)



PHILIPS ELECTRICAL INDUSTRIES OF AUSTRALIA PTY. LTD.
SYDNEY, AUSTRALIA

SECOND EDITION — JANUARY, 1952

ALL RIGHTS RESERVED