

## RF POWER TRIODE

Water cooled triode with integral helical cooler intended for use as an industrial oscillator

QUICK REFERENCE DATA			
Oscillator output power ( $W_o - W_{feedb}$ )	$W_{osc}$	6	kW
Frequency for full ratings	f max.	55	MHz

To be read in conjunction with "General Operational Recommendations".

### RF CLASS C OSCILLATOR FOR INDUSTRIAL USE \*

#### OPERATING CONDITIONS

Frequency	f	50	MHz
Oscillator output power ( $W_o - W_{feedb}$ )	$W_{osc}$	6	kW
Transformer voltage, RMS	$V_{tr}$	5,1	kV
Anode voltage	$V_a$	6	kV
Anode current	$I_a$	1,5	A
Anode input power	$W_{ia}$	9	kW
Anode dissipation	$W_a$	2,7	kW
Anode output power	$W_o$	6,3	kW
Anode efficiency	$\eta_a$	70	%
Oscillator efficiency	$\eta_{osc}$	67	%
Grid current, on load	$I_g$	0,4	A
Grid input power	$W_{ig}$	300	W

\*With anode voltage from three-phase half-wave rectifier without filter.

**LIMITING VALUES** (Absolute max. rating system)

Frequency	f	up to	55	MHz
Anode voltage	$V_a$	max.	7	kV
Anode current	$I_a$	max.	1,8	A
Anode input power	$W_{ia}$	max.	11	kW
Anode dissipation	$W_a$	max.	6	kW
Grid voltage	$-V_g$	max.	1250	V
Grid current, on load	$I_g$	max.	0,5	A
off load	$I_g$	max.	0,7	A
Grid resistor	$R_g$	max.	10	k $\Omega$
Temperature of filament seals	T	max.	210	$^{\circ}\text{C}$
Temperature of anode and grid seals	T	max.	180	$^{\circ}\text{C}$

**HEATING:** direct ; filament thoriated tungsten

Filament voltage	$V_f$	12,6	V
Filament current	$I_f$	33	A

The filament is designed to accept temporary fluctuations of +5% and -10%.

**CAPACITANCES**

Anode to all other elements except grid	$C_a$	0,3	pF
Grid to all other elements except anode	$C_g$	16	pF
Anode to grid	$C_{ag}$	11	pF

**CHARACTERISTICS** measured at  $V_a = 6$  kV,  $I_a = 1$  A

Transconductance	S	15	mA/V
Amplification factor	$\mu$	32	

**Table 1** Cooling characteristics

$W_a$ (kW)	$T_i$ (°C)	$q_{min}$ (l/min)	$\Delta P$ (kPa)*	$T_o$ (°C)
2	20	1,5	6	44
	50	3	22	62
4	20	3	22	42
	50	6	73	61
6	20	5	54	39
	50	10	180	59

Absolute max. water inlet temperature  $T_i$  max. 50 °C

At water inlet temperatures between 20 °C and 50 °C the required quantity of water can be found by linear interpolation.

In general no air cooling will be required at frequencies up to 30 MHz and at ambient temperatures below 35 °C. At higher temperatures or at higher frequencies a low velocity air flow to the grid and filament seals will be necessary.

#### ACCESSORIES

Filament connectors type 40634

Connector for centre pin of  
the filament 40649

Grid connector 40650 or 40622

The centre filament pin  $f_c$  must not be used for filament current supply. The connector type 40649 should, however, be used for cooling of this pin.

The grid connector type 40650 must not be used at frequencies higher than 30 MHz.

\* 100 kPa  $\approx$  1 at

MECHANICAL DATA

Dimensions in mm

Mounting position: vertical with anode down

Net mass : approx. 0,8 kg

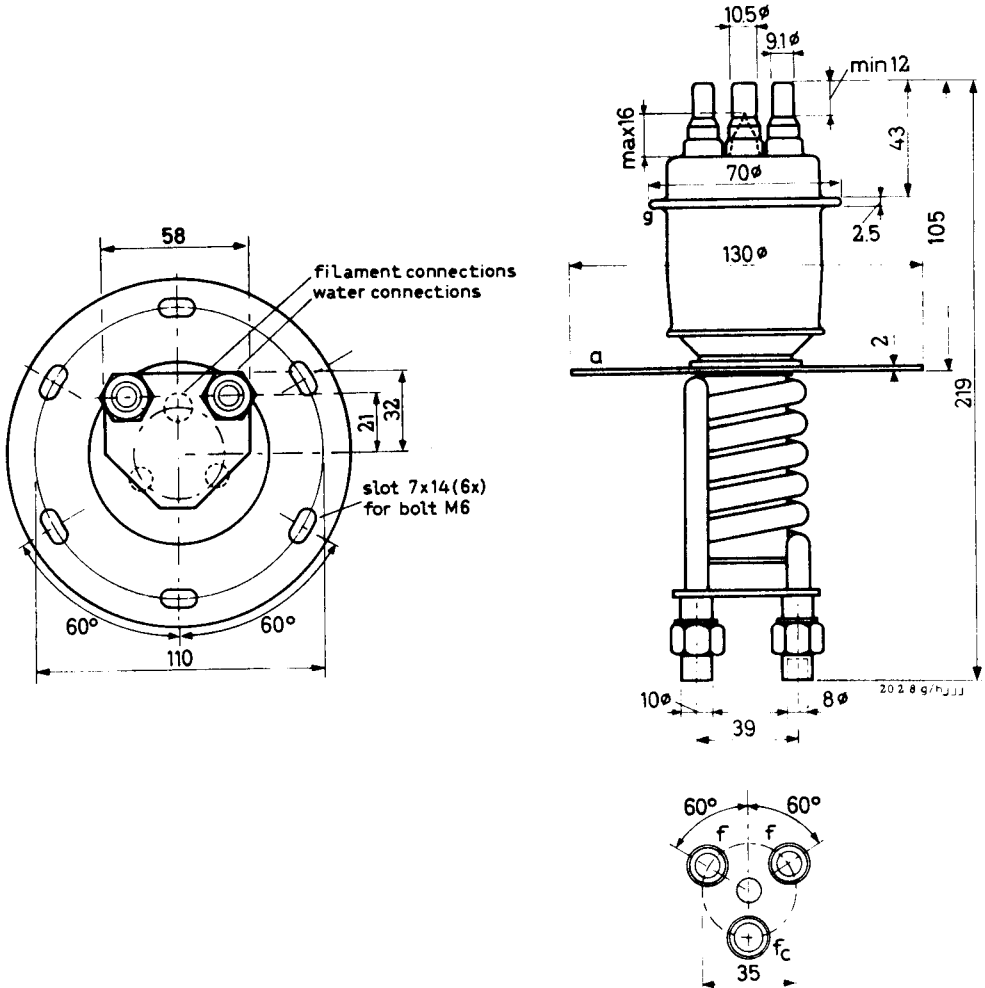


Fig. 1 Mechanical outline.

The use of wing nuts for the water connections should be avoided.

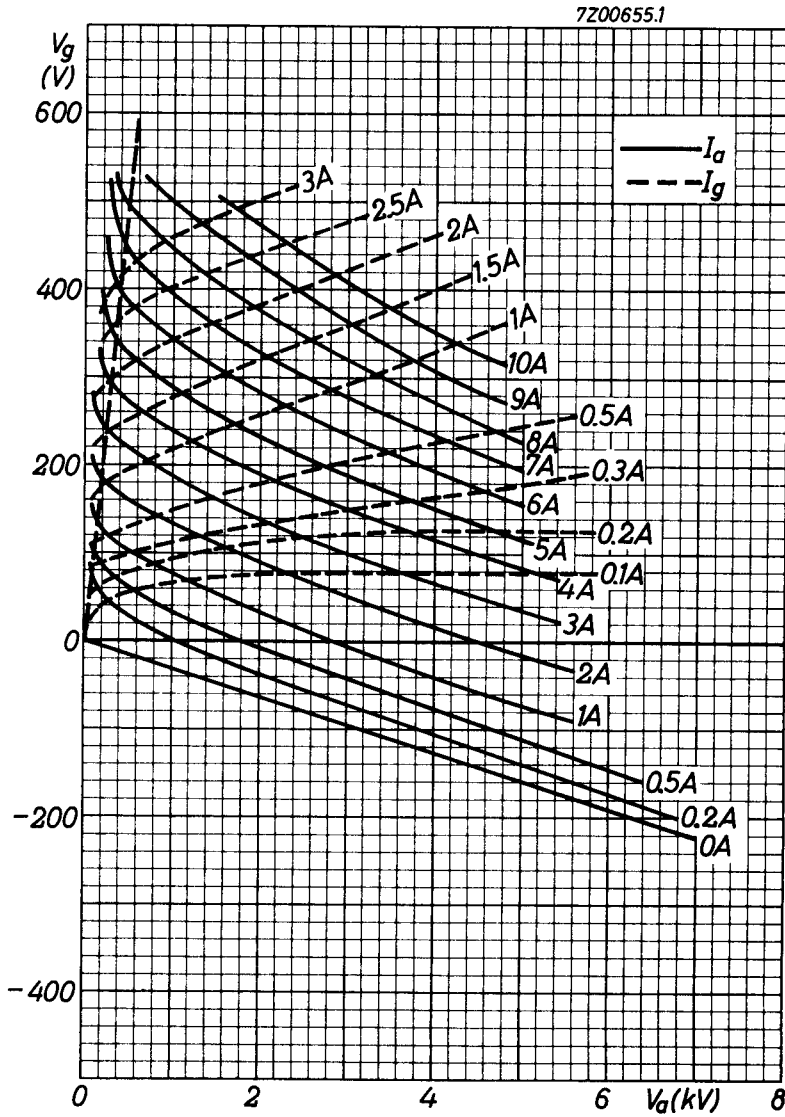


Fig. 2 Constant current characteristics.

# PHILIPS

Data handbook



Electronic  
components  
and materials

**TBH7/8000**

<b>page</b>	<b>sheet</b>	<b>date</b>
1	87	1988.02
2	88	1988.02
3	89	1988.02
4	90	1988.02
5	91	1988.02
6	FP	2000.09.16