


TUNG-SOL


PENTODE

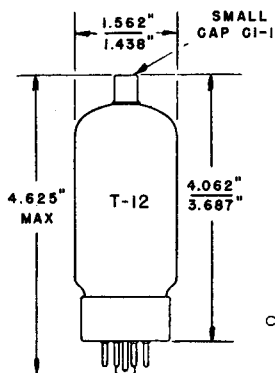

BEAM PENTODE
 SERIES REGULATOR IN
 HIGH VOLTAGE POWER
 SUPPLY APPLICATIONS

COATED UNIPOTENTIAL CATHODE

ANY MOUNTING POSITION



GLASS BULB
 SHORT MEDIUM-SHELL
 5 PIN OCTAL
 B5-123 OR B5-149
 OUTLINE DRAWING
 JEDEC 12-20

THE 8068 IS A BEAM PENTODE DESIGNED FOR USE AS A SERIES REGULATOR IN HIGH-VOLTAGE POWER SUPPLIES.

DIRECT INTERELECTRODE CAPACITANCES WITHOUT EXTERNAL SHIELD

GRID TO PLATE	0.6	pf
INPUT: G TO (H + K + G2 + G3)	10.0	pf
OUTPUT: P TO (H + K + G2 + G3)	5.5	pf

HEATER CHARACTERISTICS AND RATINGS

ABSOLUTE MAXIMUM VALUES - SEE EIA STANDARD RS-239

AVERAGE CHARACTERISTICS	6.3	VOLTS	900	MA.
LIMITS OF APPLIED VOLTAGE - AC OR DC			6.3 ± 0.6	VOLTS
MAXIMUM HEATER-CATHODE VOLTAGE			± 200	VOLTS

CONTINUED ON FOLLOWING PAGE

TUNG-SOL

CONTINUED FROM PRECEDING PAGE

MAXIMUM RATINGS

ABSOLUTE MAXIMUM VALUES - SEE EIA STANDARD RS-239

PLATE VOLTAGE	3500	VOLTS
GRID 2 VOLTAGE	250	VOLTS
PLATE DISSIPATION	35	WATTS
GRID 2 DISSIPATION	1.0	WATTS
DC CATHODE CURRENT	100	MA.
GRID 1 CIRCUIT RESISTANCE	0.1	MEGOHMS

AVERAGE CHARACTERISTICS

PLATE VOLTAGE	3500	600	VOLTS
GRID 2 VOLTAGE	100	125	VOLTS
GRID 1 VOLTAGE	-30	-7.5	VOLTS
PLATE CURRENT	1.0	36	MA.
GRID 2 CURRENT	-----	1.0	MA.
TRANSCONDUCTANCE	-----	5200	μ MHOS
PLATE RESISTANCE, APPROX.	-----	54,500	OHMS