

DOUBLE TRIODE

UCC84


Double triode primarily intended for use as a cascode r.f. amplifier at frequencies up to 220 Mc/s in television equipment with series connected heaters.

HEATER

Suitable for series operation, a.c. or d.c.

I_h	100	mA
V_h	21	V

For characteristics, operating conditions and limiting values see Type PCC84.

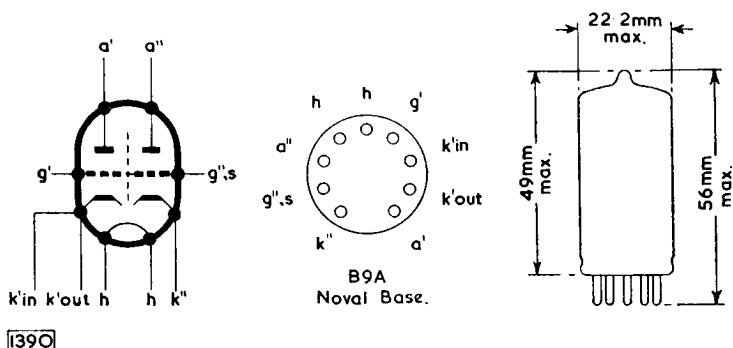

The triode on pins 6, 7, 8, 9 should have grounded-cathode connection and that on pins 1, 2, 3 should have grounded-grid connection.