

**MECHANICAL DATA**

Bulb . . . . .	T-9
Base . . . . .	D8-1, Lock-in 8-Pin
Basing . . . . .	8V
Cathode . . . . .	Coated Unipotential
Mounting Position . . . . .	Any

**ELECTRICAL DATA**

**HEATER CHARACTERISTICS**

Heater Voltage . . . . .	6.3 Volts
Heater Current . . . . .	600 Ma

**DIRECT INTERELECTRODE CAPACITANCES (Shielded)<sup>1</sup>**

Control Grid to Plate (Max.) . . . . .	.060 $\mu\mu\text{f}$
Control Grid Input . . . . .	14 $\mu\mu\text{f}$
Output . . . . .	7.5 $\mu\mu\text{f}$

**RATINGS (Design Center Values)**

Plate Voltage . . . . .	300 Volts	Max.
Plate Dissipation . . . . .	10 Watts	Max.
Screen Grid Supply Voltage . . . . .	300 Volts	Max.
Screen Grid Voltage . . . . .	See JETEC	J5-C4
Screen Dissipation . . . . .	2.5 Watts	Max.
Positive Control Grid Voltage . . . . .	0 Volts	Max.
Heater-Cathode Voltage . . . . .	$\pm 200$ Volts	Max.

**CHARACTERISTICS**

**Conditions**

Plate Voltage . . . . .	60	150 Volts
Suppressor Grid Voltage <sup>2</sup> . . . . .	0	0 Volts
Screen Grid Voltage . . . . .	100	100 Volts
Control Grid Voltage . . . . .	0	0 Volts
Plate Current . . . . .		34 Ma
Screen Grid Current 12 Ma Max. . . . .		8 Ma
Transconductance <sup>2</sup> . . . . .		9,700 $\mu\text{mhos}$
Plate Resistance . . . . .		0.1 Megohm
Control Grid Voltage for $I_b = 2.0$ Ma Max. . . . .		-5.3 Volts

**TYPICAL OPERATION**

**Pulse Amplifier**



Plate Voltage . . . . .	150 Volts
Suppressor Grid Voltage <sup>3</sup> . . . . .	0 Volts
Screen Grid Voltage . . . . .	250 Volts
Control Grid Voltage . . . . .	-10 Volts
Peak Positive Pulse Voltage <sup>4</sup> . . . . .	16 Volts
Peak Plate Current, Minimum . . . . .	120 Ma

**NOTES:**

1. External shield No. 308 connected to cathode.
2. At fixed bias of -2 volts.
3. Suppressor grid connected to cathode at socket.
4. Rectangular pulse, 2 microseconds duration, 60 cps repetition rate.

**QUICK REFERENCE DATA**

Lock-in, sharp cutoff pentode amplifier designed for service in electronic computers.

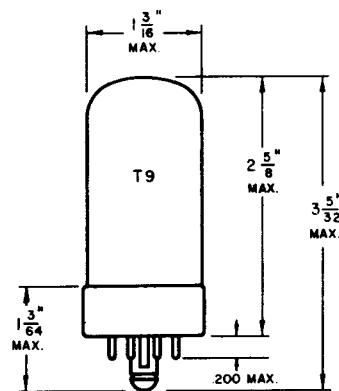


**SYLVANIA ELECTRIC PRODUCTS INC.**

*Prepared and Released By The TECHNICAL PUBLICATIONS SECTION EMPORIUM, PENNSYLVANIA*

JULY 1953

AVERAGE TRANSFER CHARACTERISTICS

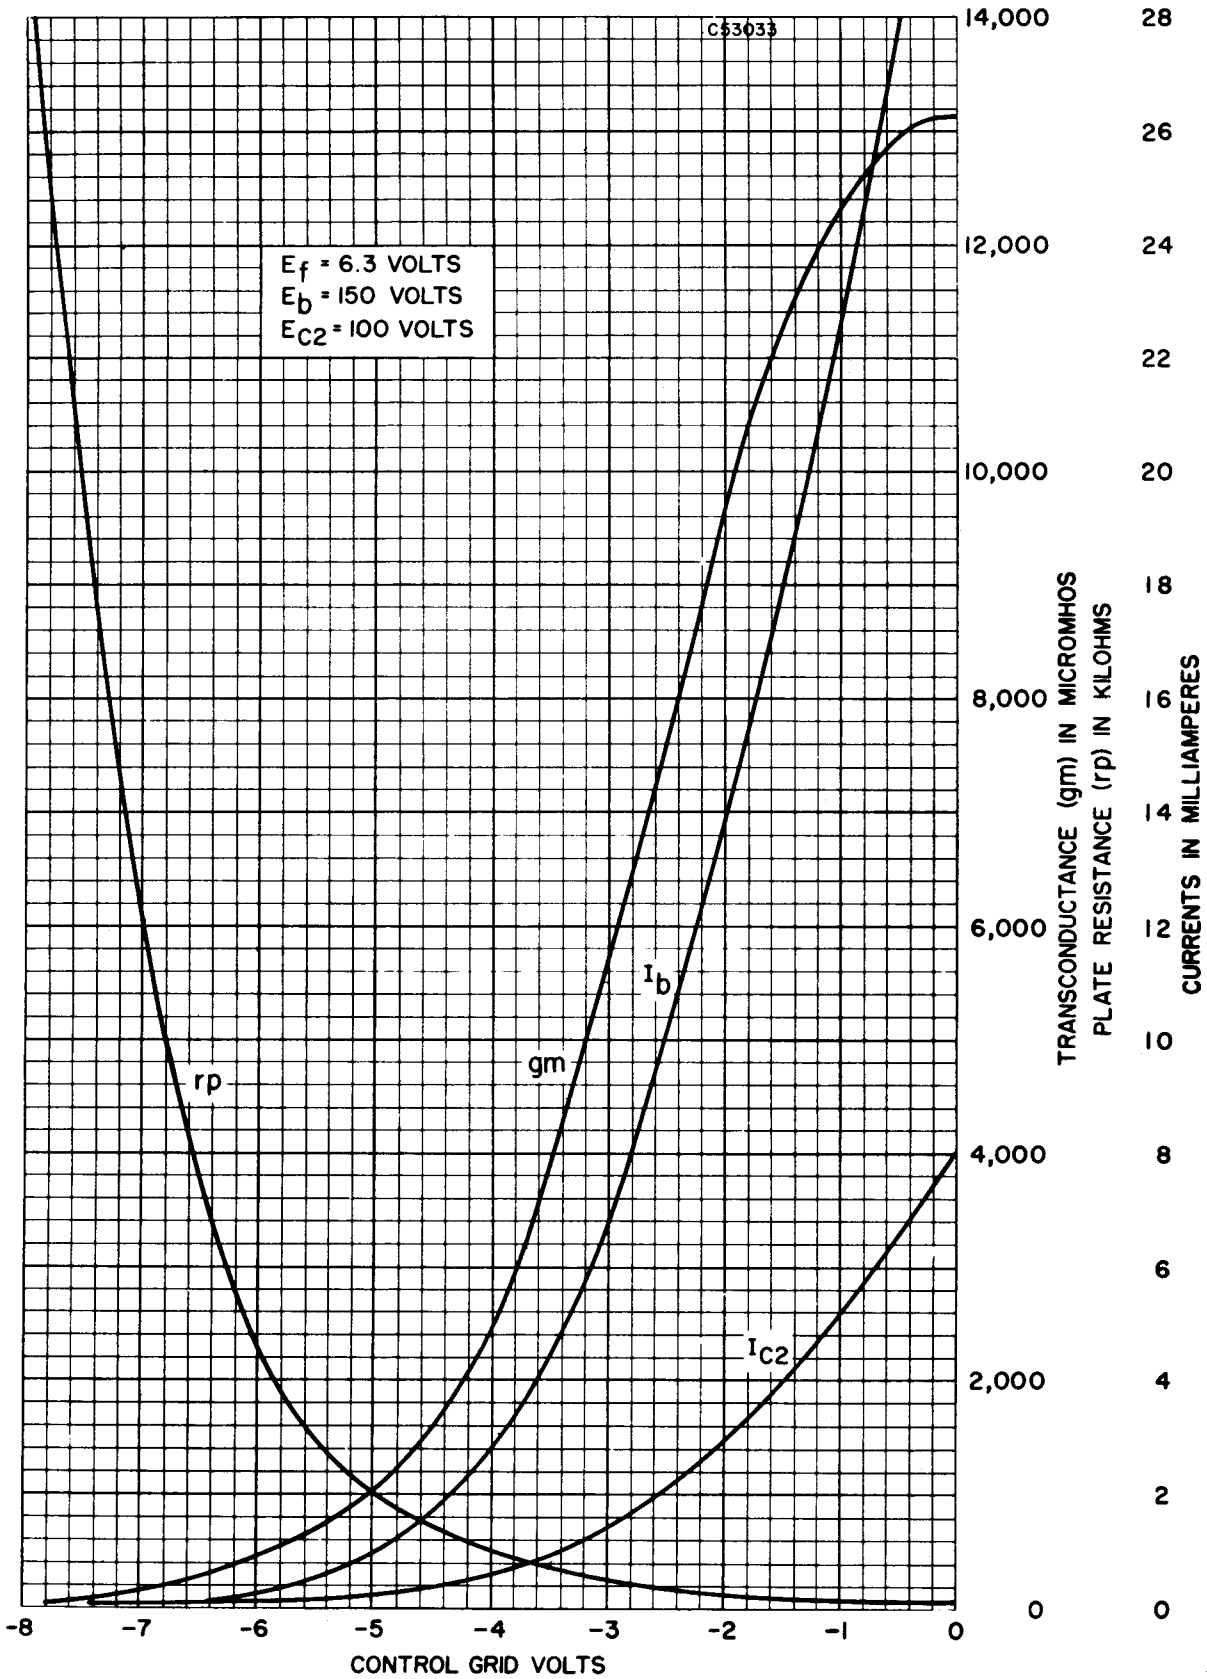

AVERAGE PLATE CHARACTERISTICS

