



Rectifier Type GXU2


General. The GXU 2 is a xenon filled half-wave rectifier mounted on a 4-pin bayonet base and with characteristics as given below.

APPROXIMATE DATA

V_f	5.0	V
I_f	7.1	A
$PIV_{(max)}$	10,000	V
$I_{(surge)(pk)(max)} (a)$	50	A
$I_{a(pk)(max)}$	5.0	A
$I_{a(max)} (b)$	1.25	A
$f_{(max)}$	150	c/s
t_{hk}	30	secs
T_{amb}	-55/+75	°C
$V_{a-f} (I_a=1.25A)$	13.0	V

NOTES

- (a) Maximum duration 0.1 sec.
 (b) Maximum averaging time 15 secs.

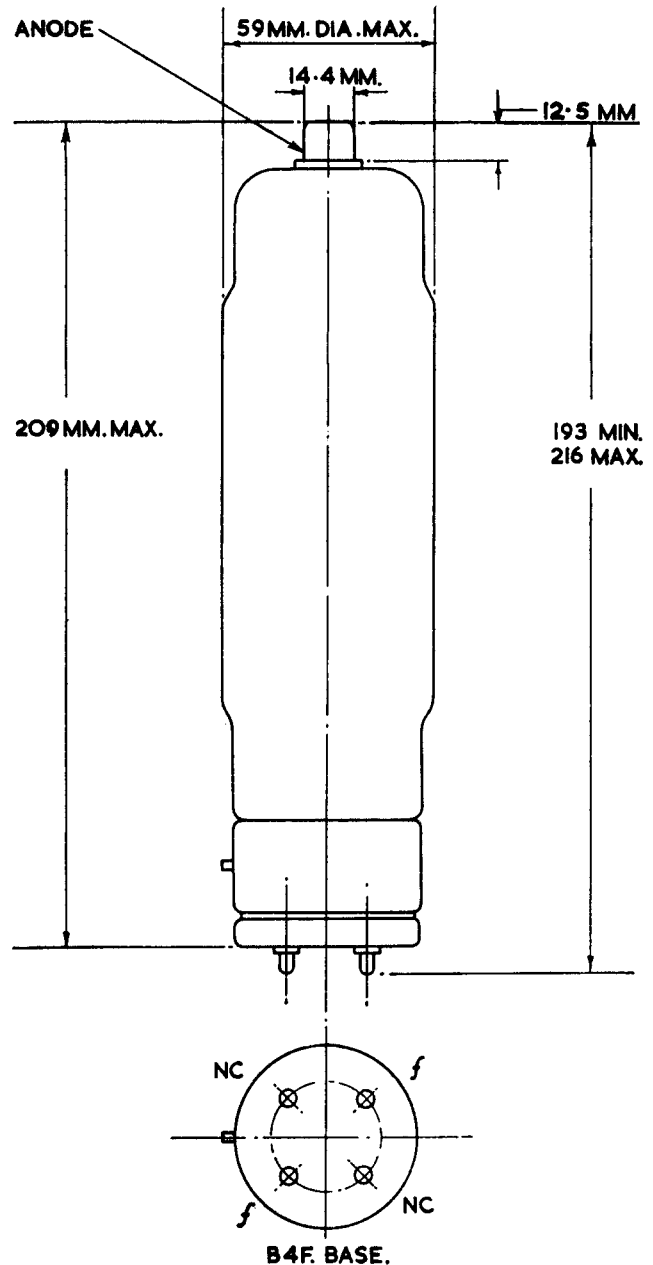

MARCONI'S WIRELESS TELEGRAPH COMPANY LIMITED

Head Office: Marconi House, Chelmsford, England. Telephone: Chelmsford 3221. Telegraphic Address: Expanse, Chelmsford

OPERATING CONDITIONS (Full Load)

Circuit	No. of valves	PIV	Full load DC Output		Applied AC Voltage (V r.m.s.)
			(V)	(A)	
Single-phase full-wave	2	10,000	3,200	2.5	3,500 per valve
Single-phase bridge	4	10,000	6,400	2.5	7,100 per valve
Three-phase half-wave	3	10,000	4,800	3.75	4,100 per phase
Three-phase full-wave	6	10,000	9,600	3.75	4,100 per phase



Circuit Notes

When quadrature operation is used, the filament voltage (pin 4 with respect to pin 2) should be crossing zero from positive towards negative when the anode voltage is at the peak of the positive half cycle.

When quadrature operation is not practicable filament pin 4 should be positive when the anode is positive.