



TECHNICAL DATA

8249
4W300B

RADIAL BEAM
POWER TETRODE

The EIMAC 8249/4W300B is a ceramic/metal, water cooled, external-anode radial-beam tetrode with a maximum plate dissipation rating of 300 watts and a maximum power input rating of 500 watts. The 8249/4W300B is designed to operate with a heater voltage of 6.0 volts. Electrically identical to the 4CX250B, it is intended for use where water cooling is preferred or where reserve anode dissipation is desired.



GENERAL CHARACTERISTICS¹

ELECTRICAL

Cathode: Oxide Coated, Unipotential

Heater: Voltage	6.0 ± 0.3 V
Current, at 6.0 volts	2.6 A
Cathode - Heater Potential	±150 V

Transconductance (Average):

I _b = 200 mAdc	12,000 μmhos
-------------------------------------	--------------

Amplification Factor (Average):

Grid to Screen	5.0
--------------------------	-----

Direct Interelectrode Capacitance (grounded cathode)²

Input	15.7 pF
Output	4.5 pF
Feedback	0.04 pF

Direct Interelectrode Capacitance (grounded grid)²

Input	13.0 pF
Output	4.5 pF
Feedback	0.01 pF

Frequency of Maximum Rating:

CW	500 MHz
--------------	---------

1. Characteristics and operating values are based upon performance tests. These figures may change without notice as the result of additional data or product refinement. EIMAC Division of Varian should be consulted before using this information for final equipment design.
2. Capacitance values are for a cold tube as measured in a special shielded fixture.

MECHANICAL

Maximum Overall Dimensions:

Length	3.407 in; 86.54 mm
Diameter	1.562 in; 39.67 mm
Net Weight	5.75 oz; 163.0 gm
Operating Position	Vertical, base up or down



Maximum Operating Temperature:

Ceramic/Metal Seals	250°C
Cooling	Water and forced air
Base	Special 9-pin JEDEC-B8-236
Recommended Air System Socket	SK-600 series

MAXIMUM RATINGS:	Class C	Class C	Class AB	TYPICAL OPERATION:	DC Plate Voltage (Volts)	Power Input (Watts)	Driving Power (Watts)	Power Output (Watts)
	Plate Mod	CW or FM	Audio or SSB					
DC PLATE VOLTAGE . . .	1500	2000	2000	CLASS C AMPLIFIER				
DC SCREEN VOLTAGE . . .	300	300	400	CW or FM	2000	500	3	390
DC GRID VOLTAGE . . .	-250	-250	-250	Plate Modulated	1500	300	2	235
DC PLATE CURRENT . . .	0.20	0.25	0.25	CLASS AB ₁ AMPLIFIER				
PLATE DISSIPATION . . .	200	300	300	Audio (Two tubes)	2000	1000	0	600
SCREEN DISSIPATION . .	12	12	12	SSB (One tube)	2000	500	0	300
GRID DISSIPATION . . .	2	2	2					

For full listing of ratings, constant current curves and typical operating conditions, see EIMAC data sheet for 7203/4CX250B.

RANGE VALUES FOR EQUIPMENT DESIGN

	Min.	Max.
Heater: Current at 6.0 volts	2.3	2.9 A
Cathode Warmup Time	30	-- sec.
Interelectrode Capacitances ¹ (grounded cathode connection)		
Input	14.2	17.2 pF
Output	4.0	5.0 pF
Feedback	---	0.06 pF

1. Capacitance values are for a cold tube as measured in a shielded fixture.

APPLICATION


COOLING - The water-cooled anode requires a minimum of 1/16 gallon of cooling water per minute for the rated plate dissipation of 300 watts. The outlet-water temperature should not exceed 70°C and the system pressure should not exceed 50 pounds per square inch.

The ceramic/metal seals must be cooled by forced air. At frequencies below 30 MHz and when one of the recommended sockets is used, a flow rate of 1.0 CFM is sufficient. As the operating frequency is increased, the air-flow rate must be increased. At 500 MHz a minimum of 3.8 CFM is required. In all cases, seal temperatures are the criteria which determine cooling effectiveness.



- PIN NO. 1. SCREEN GRID
- PIN NO. 2. CATHODE
- PIN NO. 3. HEATER
- PIN NO. 4. CATHODE
- PIN NO. 5. I.C-DO NOT USE FOR EXTERNAL CONNECTION
- PIN NO. 6. CATHODE
- PIN NO. 7. HEATER
- PIN NO. 8. CATHODE
- CENTER PIN-CONTROL GRID

DIMENSIONAL DATA						
DIM	INCHES			MILLIMETERS		
	MIN.	MAX.	REF.	MIN.	MAX.	REF.
A	--	3.407	--	--	86.54	--
B	1.450	1.490	--	36.83	37.85	--
D	0.750	0.810	--	19.05	20.57	--
E	1.106	1.186	--	28.09	30.12	--
F	--	1.406	--	--	35.71	--
G	0.187	--	--	4.75	--	--
H	BASE: B8-236 (JEDEC DESIGNATION)					
J	--	--	0.244	--	--	6.20
K	0.797	0.857	--	20.24	21.77	--
L	--	1.562	--	--	39.67	--
M	--	--	0.670	--	--	17.02
N	--	--	10°	--	--	10°
R	0.156	--	--	3.96	--	--
S	--	--	0.250	--	--	6.35
P	--	1.063	--	--	27.00	--

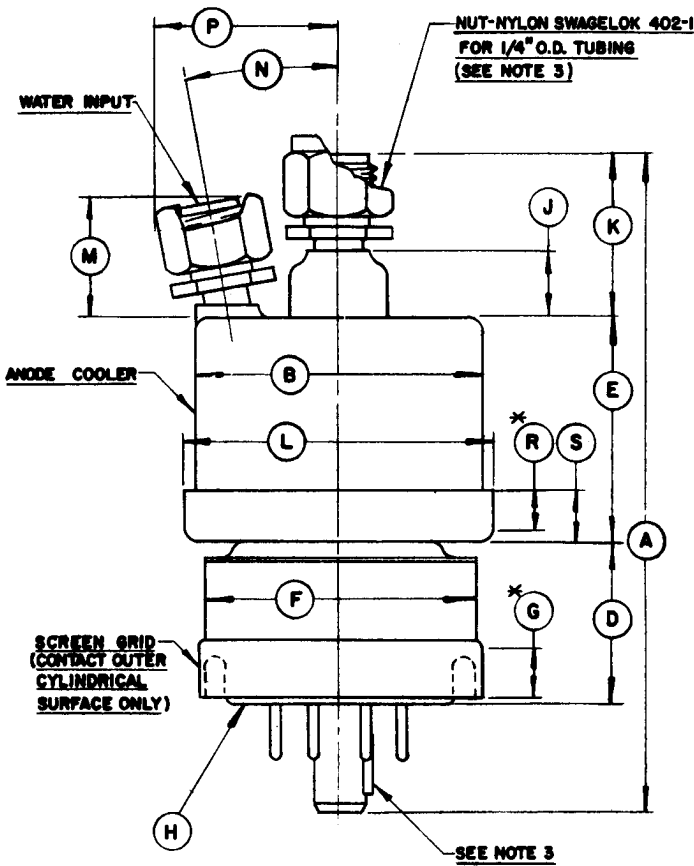

- NOTES:**
1. REF. DIMENSIONS ARE FOR INFORMATION ONLY & ARE NOT REQ'D FOR INSPECTION PURPOSES.
 2. (*) CONTACT SURFACE
 3. AXIS OF FITTINGS IS ON AXIS OF INDEX OF CENTER PIN AS SHOWN.