



Repeater Triode

3A/107A
3A/107B

3A/107A

3A/107B

(3A/107A is for replacement purposes only)

CATHODE.

Oxide-coated filament

Current	0.25	A
Nominal voltage	4	V

RATING.

Amplification factor	$\left\{ \begin{array}{l} \text{Measured at } V_a \text{ 130V} \\ V_{g1} - 8V, I_f \text{ 0.25A D.C.} \end{array} \right\}$	7	
Impedance		5,500	ohms

DIRECT INTER-ELECTRODE CAPACITIES.

Grid to anode	4.7	pF
Grid to filament	6.2	pF
Anode to filament	2.1	pF

BASE.

3A/107A American 4-pin bayonet



3A/107B Standard 5-pin British

DIMENSIONS.

Maximum overall length		
3A/107A	116	mm.
3A/107B	118	mm.
Maximum bulb diameter	46	mm.
Net weight	44	g.

MAXIMUM RATINGS.

Maximum direct anode voltage	190	V
------------------------------	-----	---

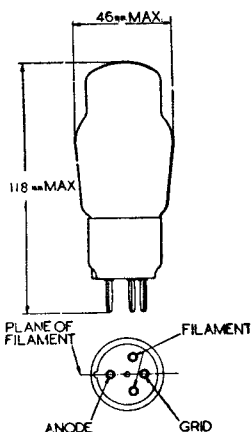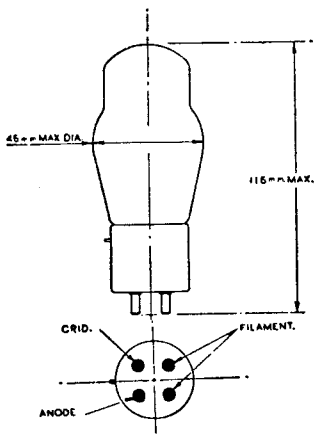

3A/107A
3A/107B

Repeater Triode



3A/107A
3A/107B

