



Repeater Triode

3A/110A
3A/110B

3A/110A

3A/110B

(3A/110A is for replacement purposes only)

CATHODE.

Oxide-coated filament

Current	0.25	A
Nominal voltage	4.0	V

RATING.

Amplification factor	} Measured at V_a 130V V_{g1} -4.5V, I_f 0.25A D.C. }	} 12	ohms
Impedance			

DIRECT INTER-ELECTRODE CAPACITIES.

Grid to anode	9.7	pF
Grid to filament	6.5	pF
Anode to filament	2.5	pF

BASE.

3A/110A American 4-pin bayonet

3A/110B Standard 5-pin British

DIMENSIONS.

Maximum overall length

3A/110A	116	mm.
3A/110B	118	mm.



Maximum bulb diameter

Net weight

	46	mm.
	44	g.

MAXIMUM RATINGS.

Maximum direct anode voltage	190	V
------------------------------	-----	---

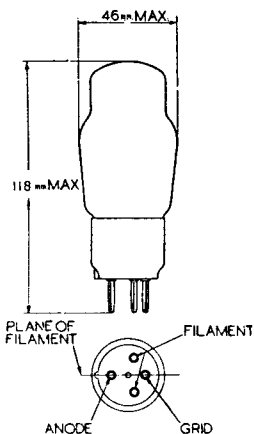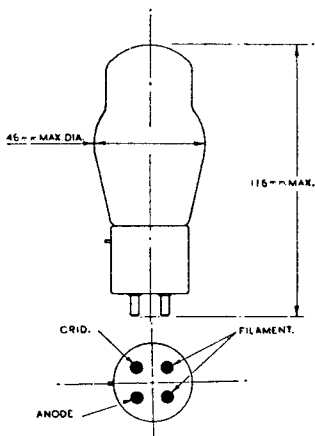

3A/110A
3A/110B

Repeater Triode



3A/110A

3A/110B

