

FULL WAVE RECTIFIER

FW4-500

Directly-heated power rectifier
for outputs up to 500 V at 250mA.

HEATER

V_f	4.0	V
I_f	3.0	A


TYPICAL OPERATING CONDITIONS

<u>Anode Voltage</u> V.rms.	<u>Capacitance of Reservoir Condenser</u> (μF)	<u>Minimum Value of Series Protective Resistance.</u> (ohms)
2x500	16	200
2x350	32	150


LIMITING VALUES

Max. Anode Voltage (rms)	2x500	V.rms
Max. Rectified Current	250	mA
Max. Peak Inverse Voltage	1600	V

DIMENSIONS

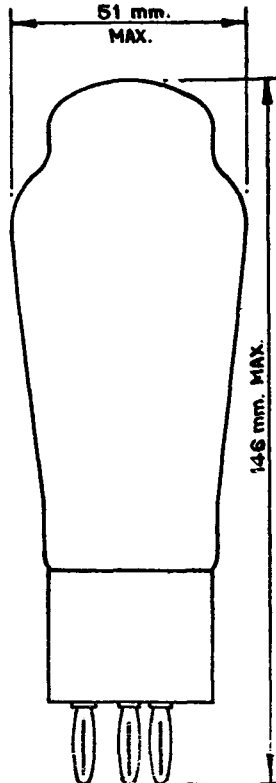

ARRANGEMENT OF ELECTRODES AND BASE CONNECTIONS

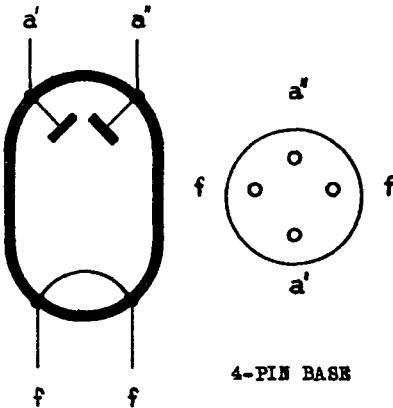

FW4-500

FULL WAVE RECTIFIER

Directly-heated power rectifier
for outputs up to 500 V at 250mA.

