

Specification

M 51EDF300WB70L

51 cm / 21 inch rectangular monochrome CRT

Landscape format

Status: Preliminary

Modifications may be agreed upon after evaluation of about 200 products.

CONTENTS

1	VIEW OF CHANGES
2	APPLICATION
3	CHARACTERISTICS
4	IMPORTANT NOTES
5	MECHANICAL DATA
6	MAXIMUM OF NOT DEFLECTED SPOT LANDING
7	OPTICAL DATA
8	PERMISSIBLE GLASS AND SCREEN DEFECTS
9	RESOLUTION
10	ELECTRICAL DATA
11	ABSOLUTE LIMITING VALUES
12	OPERATING VALUES
13	GRID DRIVE CHARACTERISTICS
14	LARGE AREA CONTRAST
15	ENVIRONMENTAL CONDITIONS
16	ESTIMATED LIFE TIME
17	X-RADIATION

1 View of changes

- The first release will be "01" .
- Changes and supplements to this specification during the development require the agreement of all persons responsible.

Responsible for the contents of this document are:

<i>Company/Department</i>	<i>Name</i>	<i>Tel.</i>	<i>Date</i>	<i>Signature</i>
PDS	P.Aerssens	+31 45 5439331		

Siemens
A&D SE BT E

ChangeNr.				
Date	11-1-2006	2-2-2006		
Release	01	02	03	04

ChangeNr.				
Date				
Release	05	06	07	08

Changed pages:

<p>Release: 02</p>	<p>Pages: 01 :Type designation changed 11 : Blemish specification changed 16 : Heater Cathode voltage 25 : Drawing : brackets added</p>
-------------------------------	--

2 Application

CRT for displays in medical and alphanumeric applications

3 Characteristics

**high resolution
90° -deflection
flat & square color bulb (low browning glass)
multicoated
conductive coated against charching
intrinsically safe
high contrast
high luminance
long life time**

4 Important notes

Implosion hazard

CRT is evacuated. In case of mechanical damage (e.g. by shock or scratches) implosion can occur.

CRT is labeled according:

**UL 1418
MPR II**

High voltage

For reasons of the CRT's capacities the anode connection can conduct high voltage for a long time after high voltage is switches off.

X-ray emission

Operating the tube within the limits the x-ray dose rate will be under the allowed value of 1 µSv/h (adequate to: 0,1 mR/h)

The tube is an intrinsic CRT type according the RöV (German Röntgenverordnung) dated Jan, 8th 1987, Part I; Atteachment III, paragraph 6.

5 Mechanical Data

Screen rectangular, R = 1370 mm

Useable screen

- Screen diagonal min. 508,0 mm
- Screen width min. 304,8 mm
- Screen height min. 406,4 mm

Position of operation anode connector on top of tube

Socket JEDEC B10-277 or equal

Neck diameter 29,1 mm ± 0,7 mm


Anode connector Bulb contact 7,92 DIN 41543

Deflection yoke Drawing nمبر. 250 898.ZZ
THOMSON-Yoke No.: 9294.xx

Weight Approx. 17,0 kg incl. Deflection yoke

Mechanical outlines see attachment 1

6 Maximum of not deflected spot landing

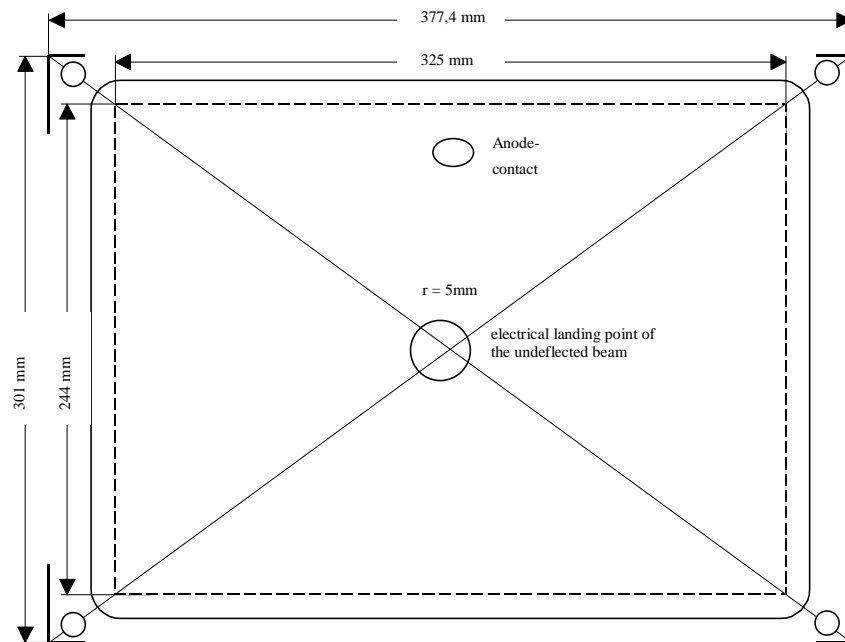

- The CRT is mounted by angle brackets to an apparatus (see schematic in enclosure 1) whose pick-up holes meet those of the monitor chassis.
- The CRT has to be moved in its fitting ears in such a way, that finally the centre of the glass bulb matches the mechanical centre of the jig ± 1 mm.
- Phosphor material must be everywhere within a window of 300×400 mm. The centre of that phosphor window matches the mechanical centre of the CRT.
- The spot or the deflection yoke will be adjusted, so that symmetrical and equal focus exists.
- The non-deflected spot landing must be within a circle with a radius of 2 mm around a point 3 mm left and 2 mm down from the mechanical centre of the CRT, provided that:
 - the CRT axis is in east-west direction and the front panel is facing east,
 - the anode connector is located on top of the tube,
 - the deflection unit has been mounted to the tube,
 - there is a metal shield behind the deflection unit around the tube's neck
- The maximum rotation angle of the deflection unit may not exceed 0.2° .

7 **Optical data**

Total transmission of bulb including coating/panel: **49 % ± 3 % at 546 nm**

Phosphor **P45**

7.1 **Noise Power (see fig.)**

Color coordinates: (during operation) **P45-Phosphor**

at a luminance of 250 Cd/m² (Nit) with CL60-Filter, (measured with LMT Color meter or Minolta CA100) **X = (0,250 ± 0,01) Y = (0,305 ± 0,01)**


Front panel **Transmission at 546 nm ca. 95% Coating Flabeg OEL-95**

Direct coating alternative after agreement with customer. The connection with the mounting device aluminium strips are mounted on front panel.

Uniformity of luminance from centre to any corner **At a luminance of 50 Nit the overall deviation of luminance from centre to any corner may not exceed 12 Cd/m² (Nit) at any point of the screen.**


Glass bulb **Drawingnbr. 252 907.GZ or equivalent bulb after agreement with customer.**

7.1 Noise power

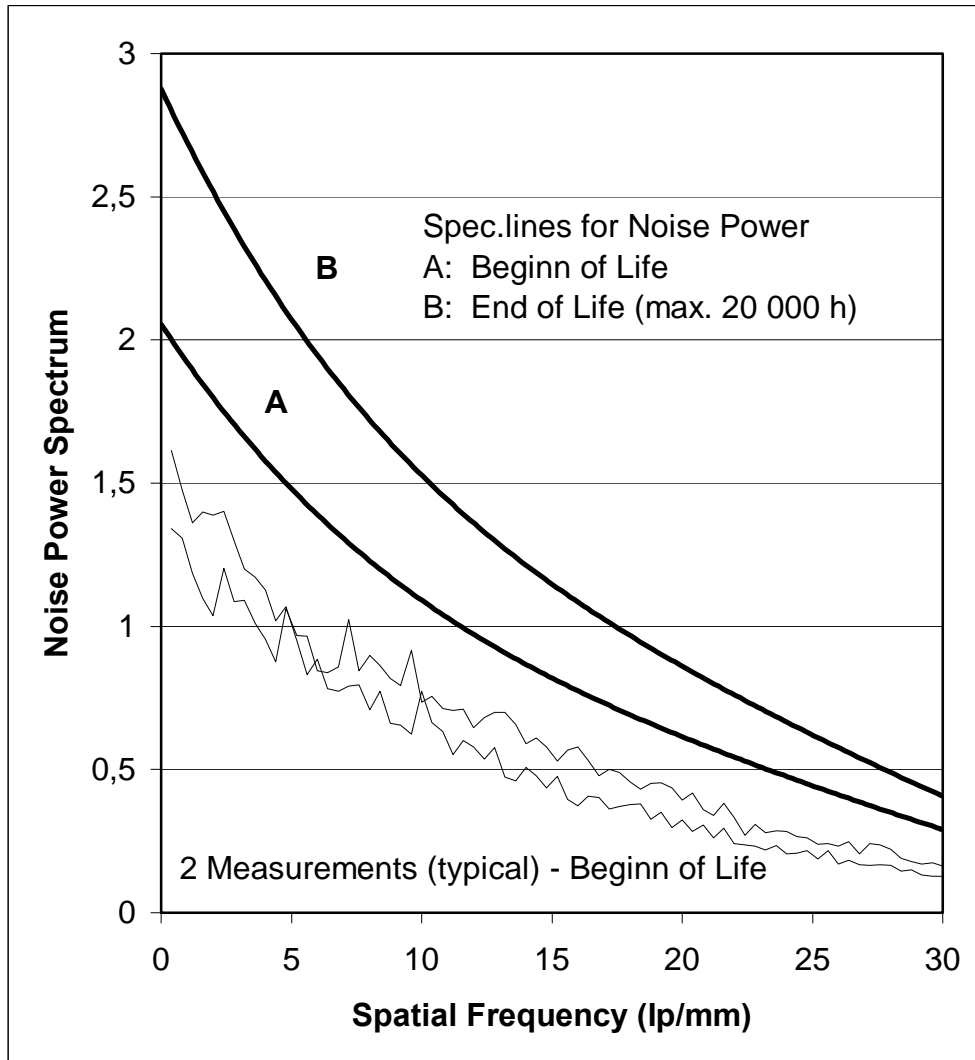


Noise Power measured with SIEMENS Measurement system.

8 **Permissible Glass and screen defects**

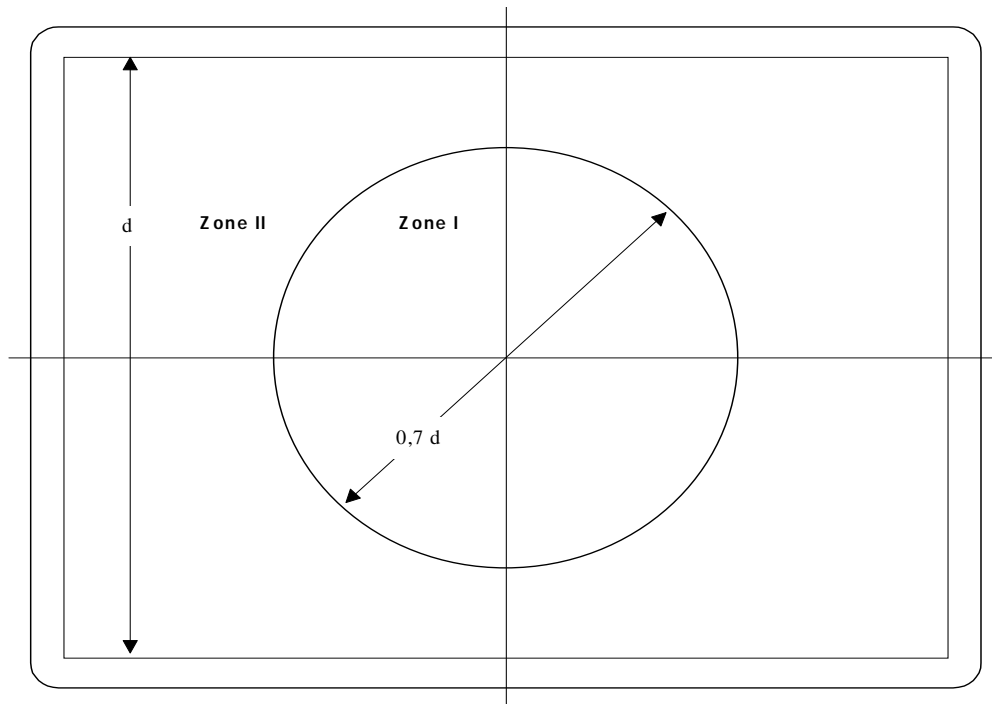

L: max. length of defects

B: max. width of defects

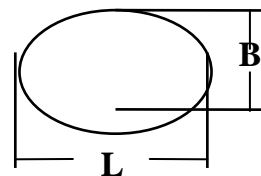

d = 300 mm

Defect size G for the screen and glass specification

for a side ratio of $L/B \leq 3$ $G = \frac{1}{2} (L + B)$
 for a side ratio of $L/B > 3$ $G = L/20 + 2 B$

Permissible defect (Panel included)

Defect size G in mm	Number of defects Zone I	Number of defects Zone II	Number of defects Sum ¹⁾
< 0,2	Within any area of 30 *30 mm only 3 phosphor defects with size 0.1 – 0.2 mm are allowed.		
0,2 < G < 0,4	2	3	4
0,4 < G < 0,6	-	3	3
Distance between defects	> 50 mm	> 50 mm	


1) Maximum number of defects in zone I and II : 4

Scratches

Sum ≤ 2
 distance > 50 mm
 max. length < 10 mm
 max. width < 50 μ m

Scratches <15 μ m are permitted

Not allowed defects:
 Open holes, stones, folts, cracks, accumulated defects, 'cloud'.

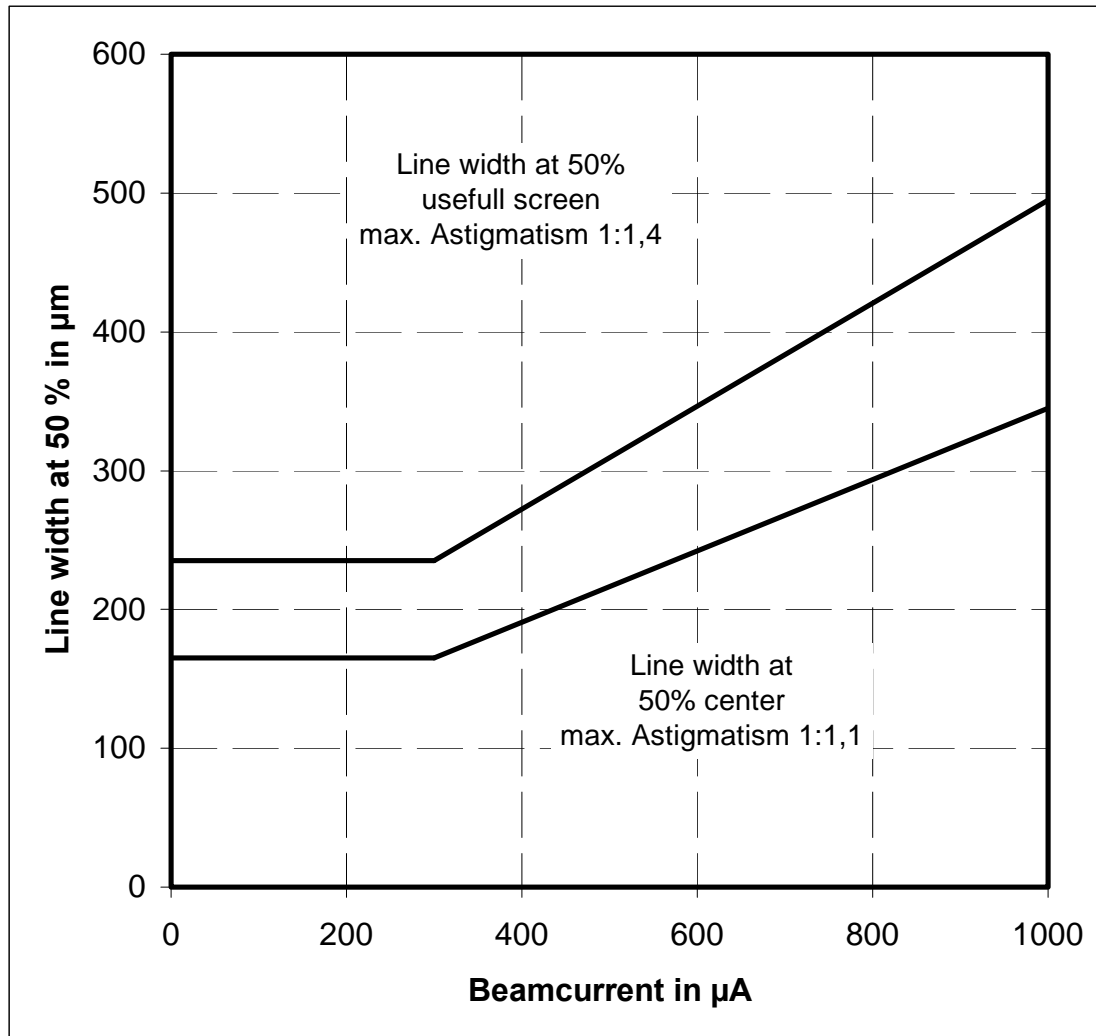
9 Resolution**50 % of peak value****Optimal focus: 300 μ A****Duty cycle 100 %**

Measured with Microvision Superspot SS200 or PDS spot profile measuring system

- Astigmatism at 5% and 50%-line width has the same shape.
- Astigmatism is not allowed to turn at increased beam current
- The spot profile approximates the Gaussian distribution.

Resolution

**5 % of peak value
Duty cycle 100 %**

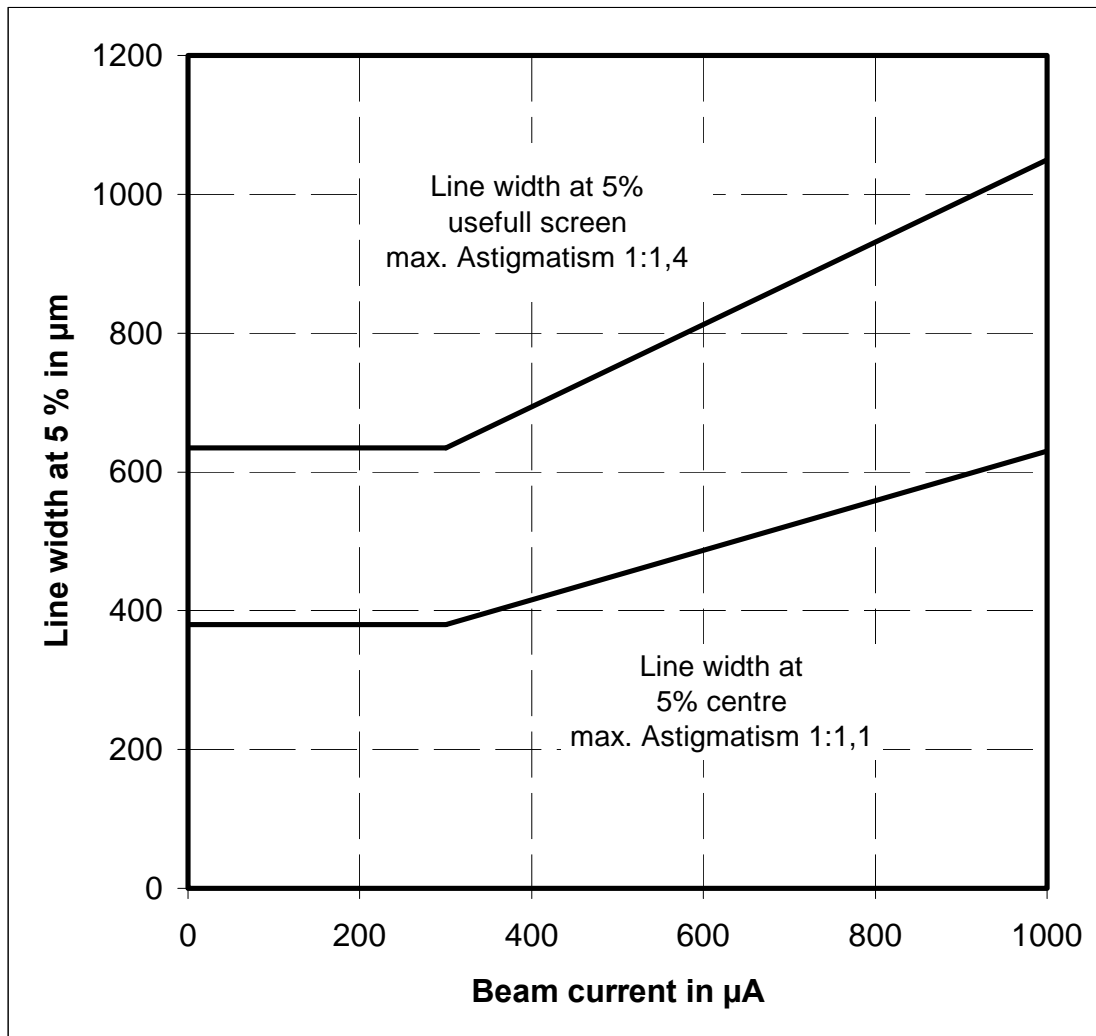

Measured with Microvision Superspot SS200 or PDS spot profile measuring system

10 Electrical Data

Deflection

magnetically, deflection angle

- horizontal ca. 78°
- vertical ca. 60°
- diagonal ca. 90°

Focussing

electrostatic

Maximum currents (leakage)

I_{G1}	$\pm 1\mu A$	max. 5 changes allowed
I_{G2a}	$\pm 1\mu A$	
I_{Gsb}	$\pm 1\mu A$	
I_{G3}	$\pm 2\mu A$	

Capacity *) (Grid 1 to all other electrodes)

 C_{G1-all} 5,3 pF \pm 1 pF

Capacity *) (Cathode to all other electrodes)

 C_K 3.5 pF \pm 1 pF

Capacity *) (Grid1 to cathode)

 C_{G1-K} 2,3 pF \pm 0,7 pF

Capacity (Anode to outer coating)

 C_{A-M1} 1600 ... 3000 pF

Electrical Data from THOMSON-Coil

 Drawing nمبر. 250 898.ZZ
 THOMSON-YOKE Nr. 9294.xx

Horizontal deflection

Lx	49,5 $\mu H \pm 5 \%$
Rx	150 $m\Omega \pm 10 \%$

Vertical deflection

Ly	1.83 $mH \pm 5 \%$
Ry	3.28 $\Omega \pm 10 \%$

Rotationcoil

Rr	133 $\Omega \pm 10 \%$
Ir	47 $mA / 1^\circ$

Astigmatism Axial

La	23 $\mu H \pm 5 \%$
Ra	< 6 Ω

Astigmatism Diagonal

Ld	23 $\mu H \pm 5 \%$
------	---------------------

Rd < 6 Ω

***) measured with PHILIPS RLC Meßbrücke PM6303**

11 Absolute limiting values

Cathode is reference point for all voltage values

First accelerating voltage	UG2 I&II	max. 1300 V min. - 400 V	
Second accelerating voltage	UA	max. 29,9 kV	
Focus voltage	UG4	max. 9 kV	
Grid 1 voltage	- UG1	max. 150 V (200 V for 5 sec. after switch off) min. 2 V	
Heating against cathode	UHC	negative	255 V
		negative peak	300 V
		positive	3 V
		positive peak	50 V
	IHC	max. 15 μ A	
Grid 1 leakage resistance	RG1	1,5 M Ω	
Damping of deflection field:	<p>The power consumption of the horizontal deflection is allowed to increase by max. 1.4 W when yoke is mounted to the CRT. (at 80 kHz horizontal frequency, a retrace time of $\leq 2,5 \mu$s and a horizontal width of 400 mm at $U_A = 27,5$ kV).</p>		

12 Operating values

Cathode heating	- indirect		
	- Heating voltage	U_h	6,1 V \pm 2%
	- Heating current,	I_h	approx. 100 mA;
		I_{hmax}	0,5 A (cold state)

Cathode is reference point vor all valtage values following

First accelerating voltage	$UG2 I$	600 - 930 V
Halo suppression voltage	$UG2 II$	0 - 200 V

Grid 1 voltage (for spot suppression)	- $UG1$	105 V
--	---------	-------

second accelerating voltage	U_A	29,0 kV
------------------------------------	-------	---------


Drive voltage (grid drive) (from $I_c = 0 \mu A$ to $I_c = 1200 \mu A^1$)	ΔU_{WE}	max. 85 V
--	-----------------	-----------

Luminance drift over time	max. 18 minutes after switch on (an overshoot of max 10% of cutoff voltage is allowed during this time)	
----------------------------------	--	--


Focus voltage (at centre of screen at $I_c = 300 \mu A$)	$UG3$	min. 6,80 kV nom. 7,15kV max. 7,50 kV
--	-------	---

Dynamic focus voltage (with reference to Thomson-yoke Nr. 9294.xx)	$UG3 \text{ dyn.}$	max. = 850 V
---	--------------------	--------------

13 Grid drive characteristics

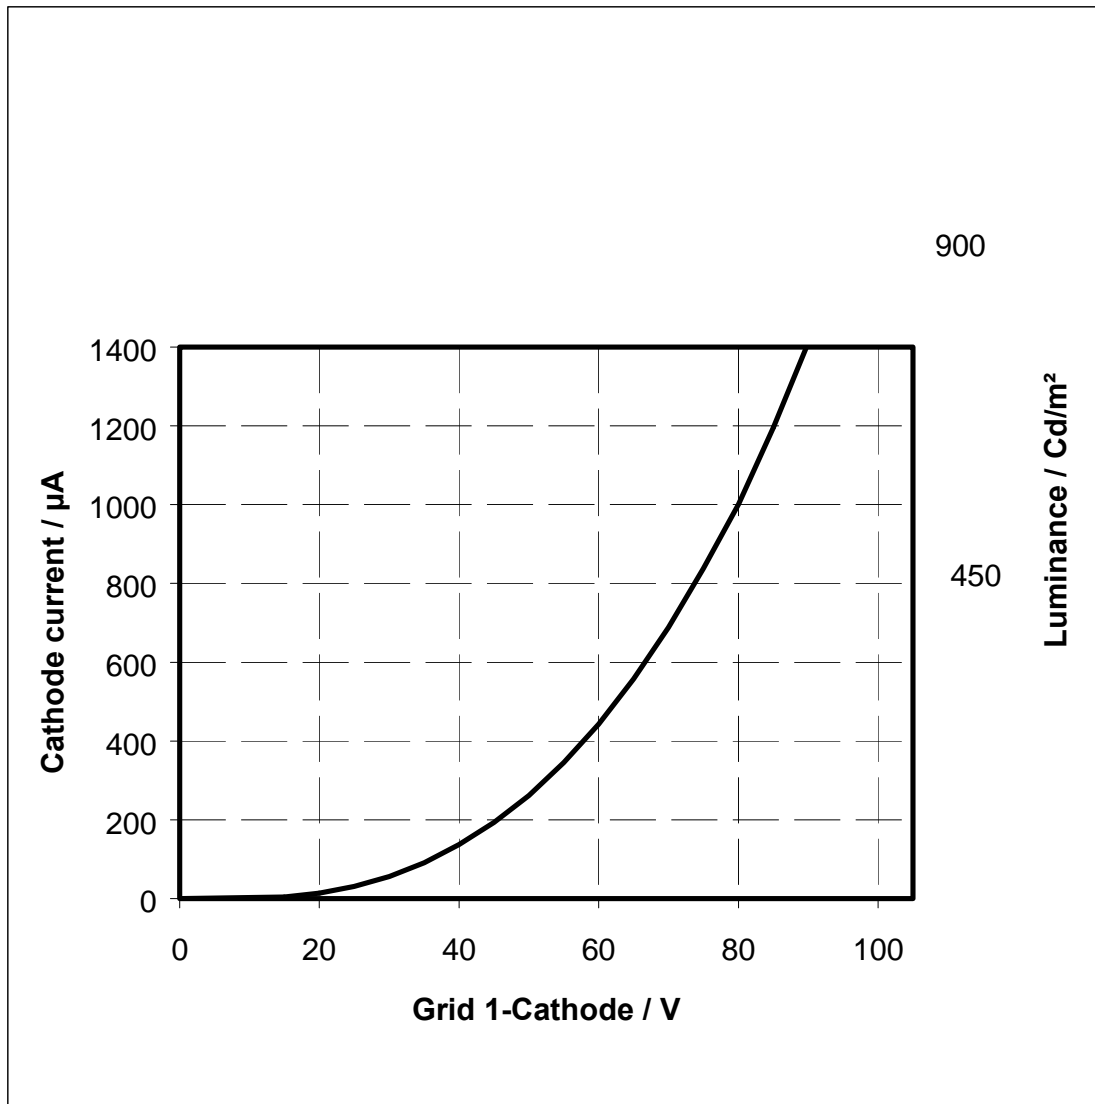

Luminance at 100% Transmission
Scan area 300*400 mm

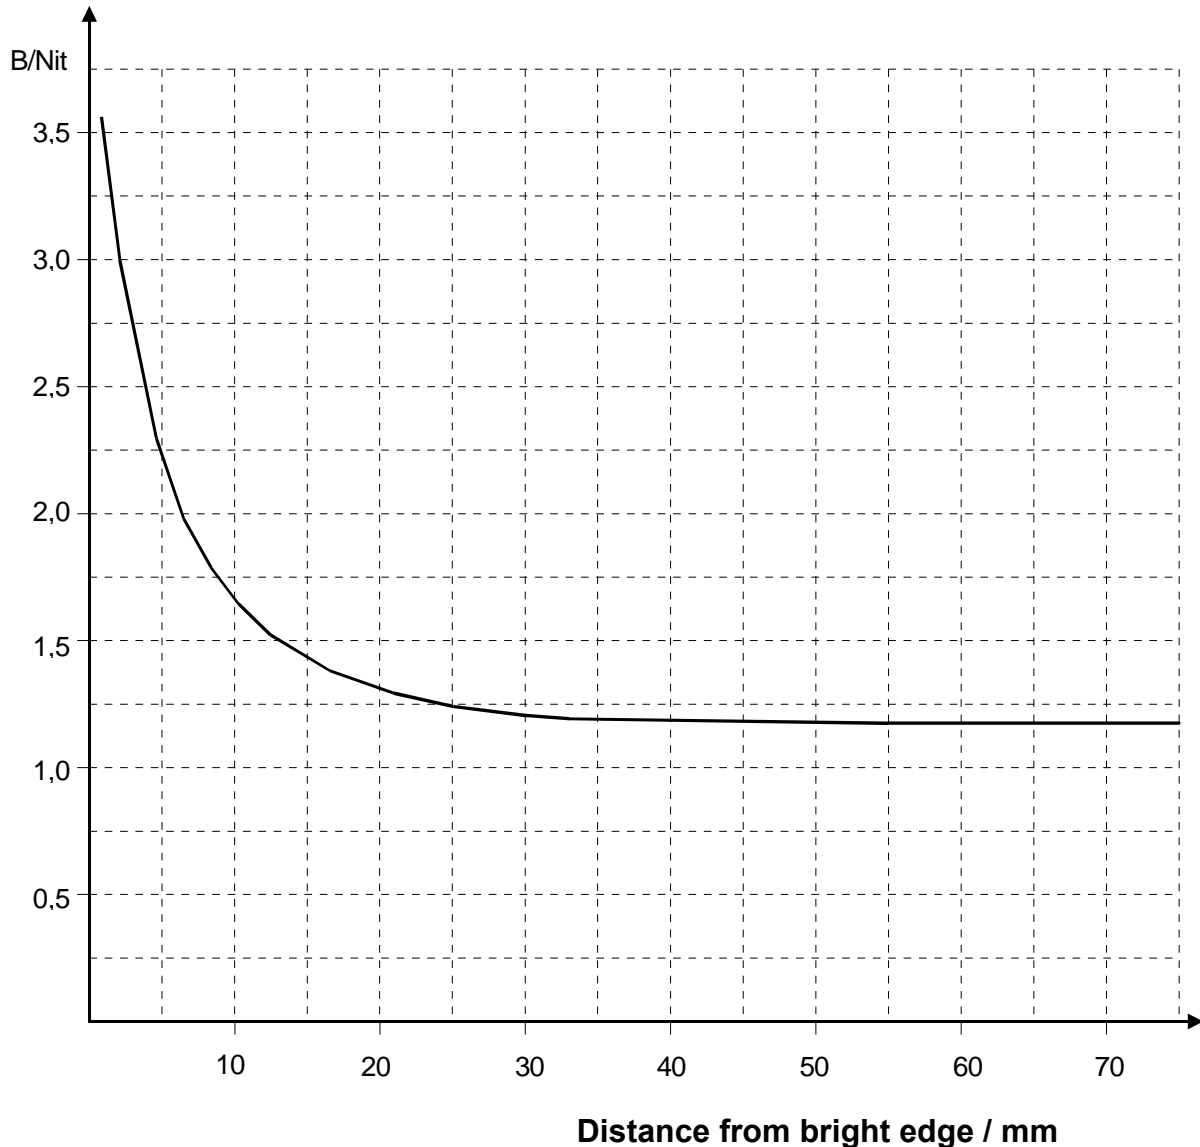14 Large area contrast**Max. value**

To measure the large area contrast a bright rectangle is displayed on one half of the screen. This area must be 50% of the total screen area with an aspect ratio of $x : y = 2:3$, and a luminance of 400 Nit.

The luminance of the black area is adjusted in such way that no lines can be seen in dark room conditions (optical cut-off value).

With the Microvisionsystem Superspot (or similar) the brightness is measured in relation to the distance from the black/white edge.

The bright rectangle must be totally covered with a non reflecting cover during measuring.

15 Environmental conditions

Temperature range:

Operation 0 to + 70 °C
 relative humidity 75 %
 non condensing

Storage - 40 to 70 °C

Temperature gradient 20 °C/h

Air pressure 400 hPa to 1060 hPa

16 Estimated life time

Decrease of the cathode current of 800 µA at 100 % duty cycle and constant Cut-Off-voltage (Grid 2-voltage adjusted)

after 20.000 hrs. < 10 %

Burning conditions:

The cathode current during testing is max. 500 µA at 100 % duty cycle over total scan area.

During life time of the CRT (20 000 hours) G2a voltage may be increased to max. 1250 V, to maintain G1-Cut-Off voltage of -105V.


At a maximum luminance level of 350 Nit, after 20.000 hours of operation ,the maximum decrease in phosphor luminance is 15 %.

17 **X-radiation**

X-Radiation Limit Curve

Conditions:

Cathode current $I_C = 250 \mu\text{A}$

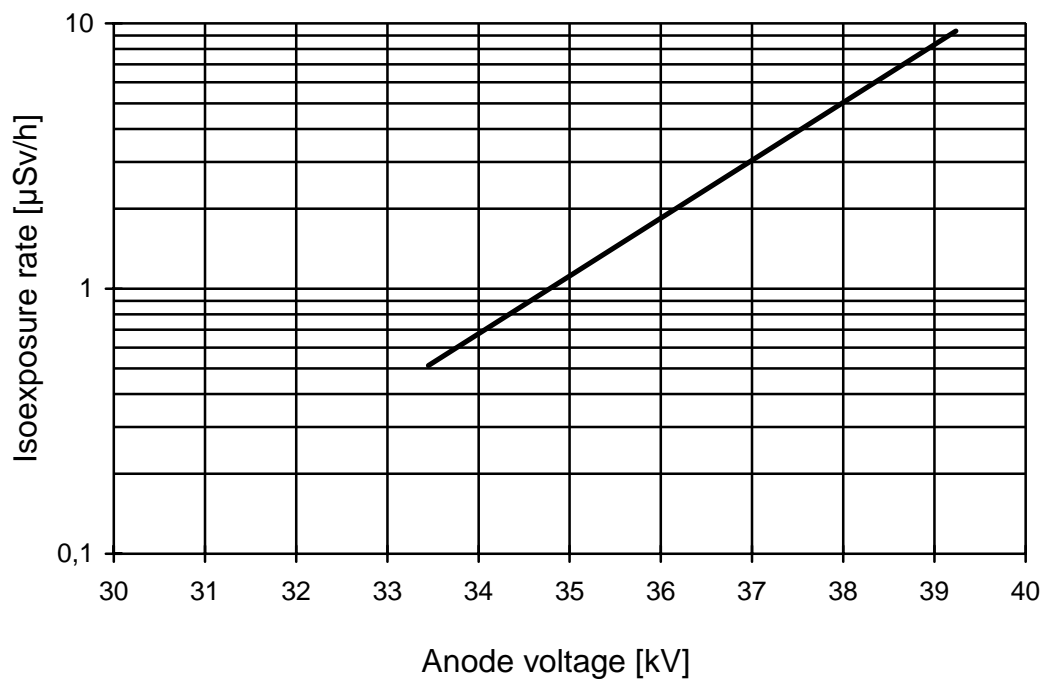


X-Radiation exposure rate vs. anode voltage at a constant value of cathode current measured at 5 cm from the CRT.

The measurement is according:

“Röntgenverordnung der Bundesrepublik Deutschland vom 8. Januar 1987”

Isoexposure - Rate Limit Curve


Calculated for 5 $\mu\text{Sv/h}$

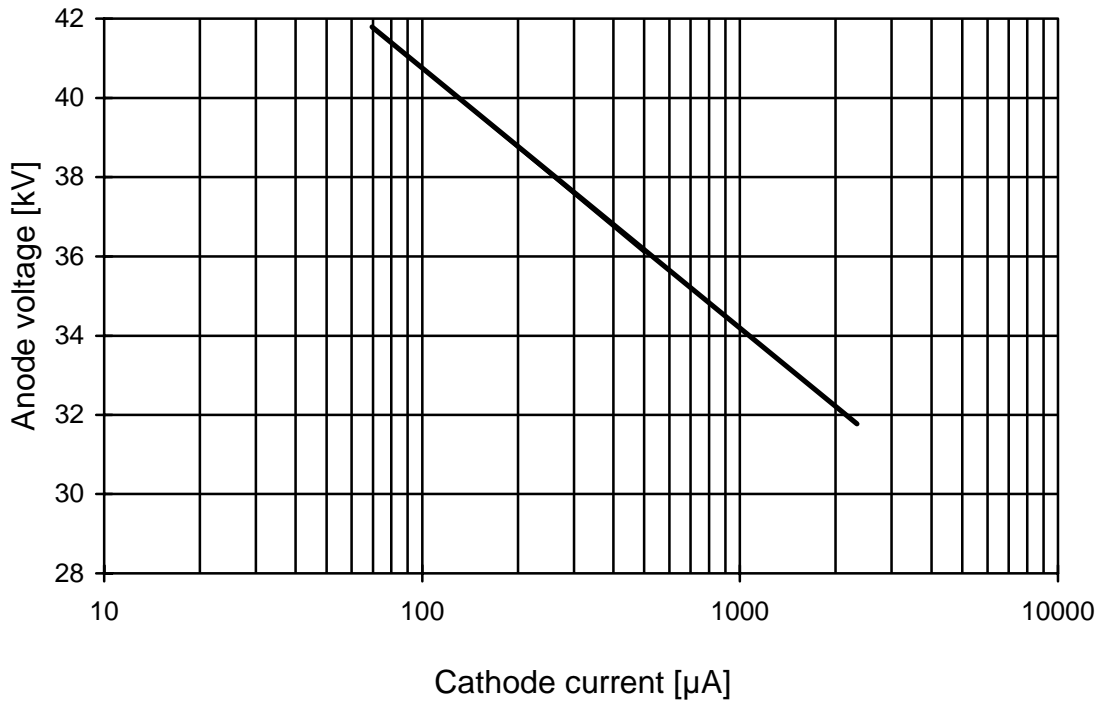

This limit curve is plotted at an isoexposure rate of 5 $\mu\text{Sv/h}$ (0,5 mR/h) measured at 5 cm from the CRT.

Isoexposure - Rate Limit Curve

Calculated for 1 $\mu\text{Sv/h}$

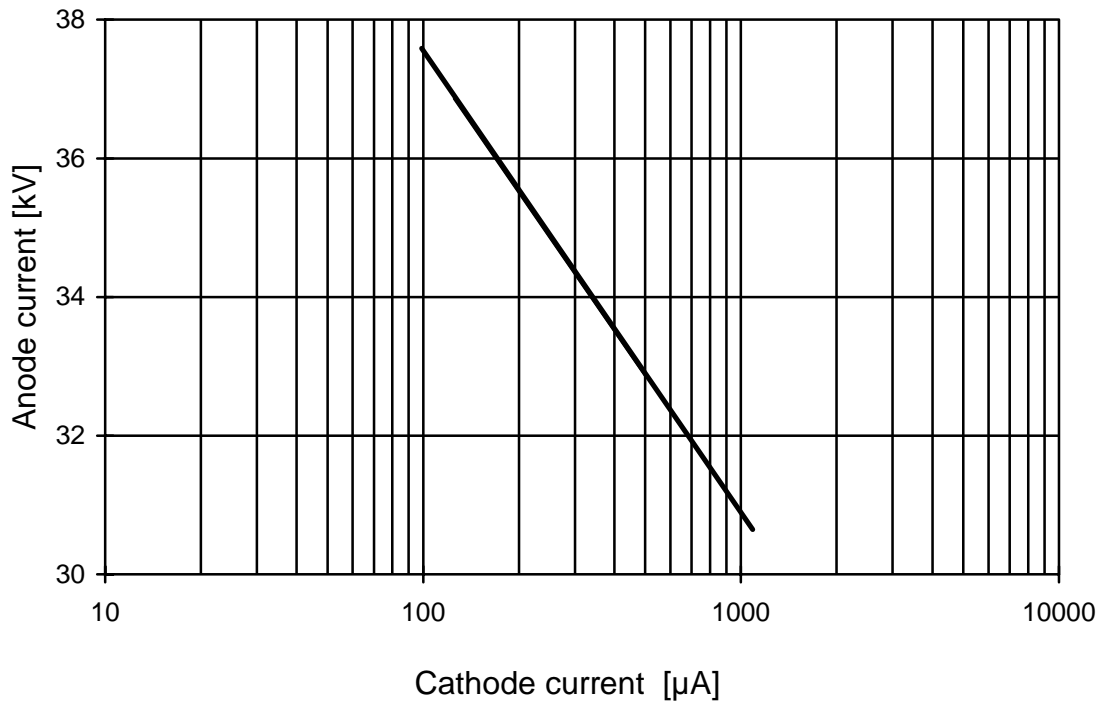

This limit curve is plotted at an isoexposure rate of 1 $\mu\text{Sv/h}$ (0,1 mR/h) measured at 5 cm from the CRT.

Attachment 1

