


ABSOLUTE MAXIMUM RATINGS

Transmitter Peak Power	3000 kw.
Transmitter Average Power	4500 W.
Ignitor Current	200 ma.

OUTLINE DRAWING

See attached drawing dated 11-24-54.

**Note 1: The input of the tube is to mate with a UG 148 A/U
or equivalent narrow band choke flange.**

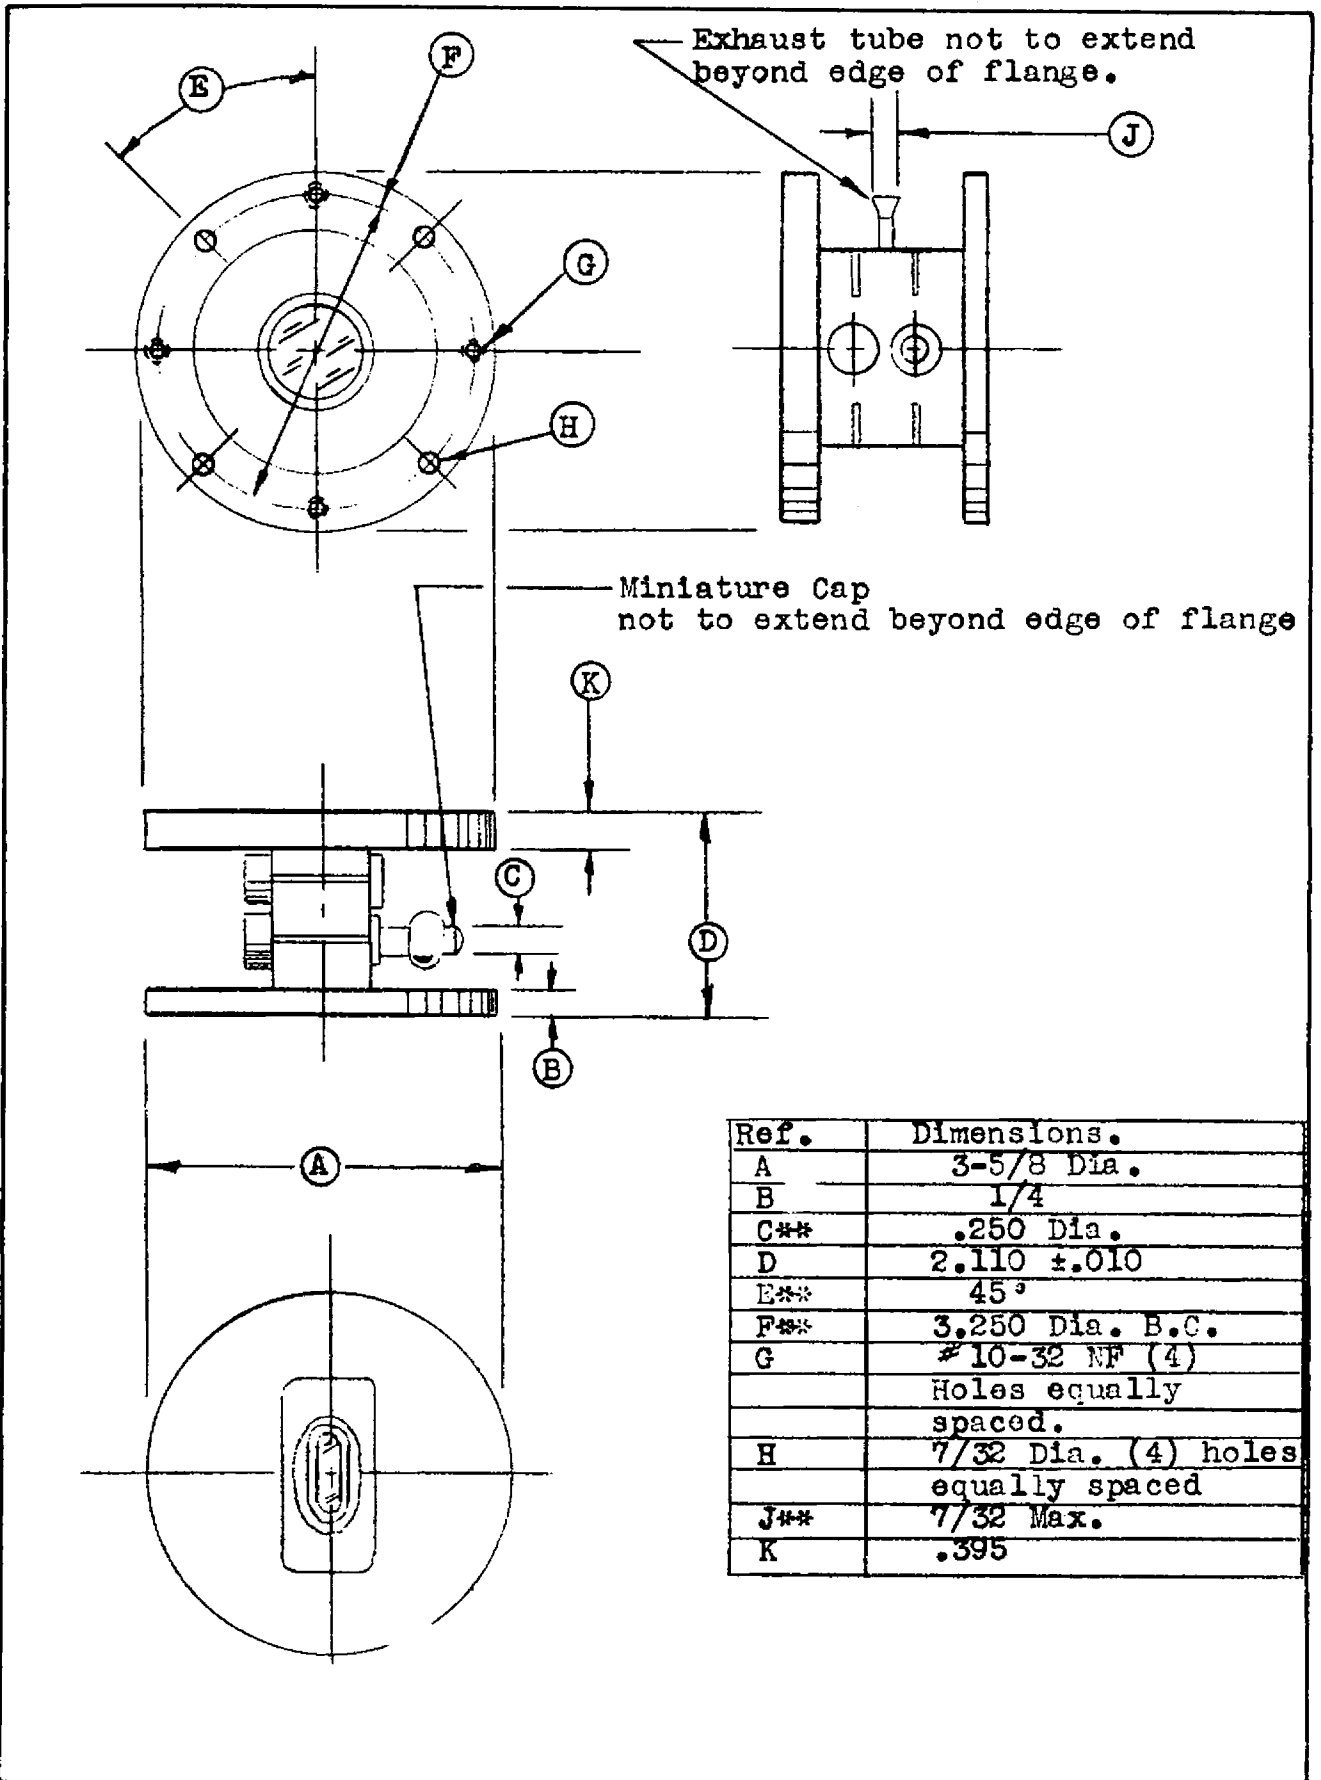

SPECIFICATION SHEET

OUTLINE

6568/ BL-28

BOMAC LABORATORIES INC.
SALEM ROAD
BEVERLY, MASSACHUSETTS

11-24-54 R.R.