

MAZDA

NE5 NEON


NE5

GENERAL

This neon tube is particularly suitable for the operation of small relays in automatic timing circuits, etc. Connections are made to the Anode and Cathode pins i.e. Pins Nos. 1 & 5. Care must be taken to ensure that the Anode pin is always connected to the positive side of circuit.

RATING

Approximate Striking Voltage (volts)	210
Approximate Extinguishing Voltage (volts)	110
Maximum Mean Current (mA)	20

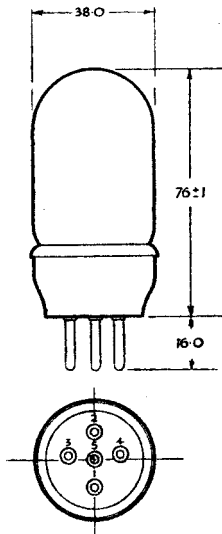

NOTE: No resistance
in base