

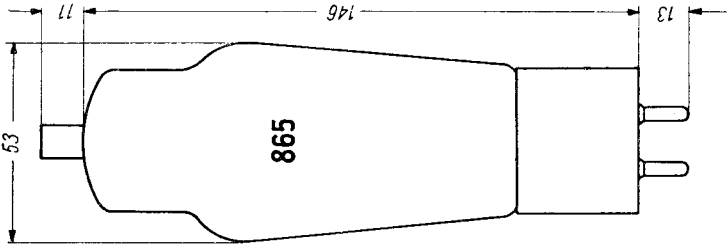

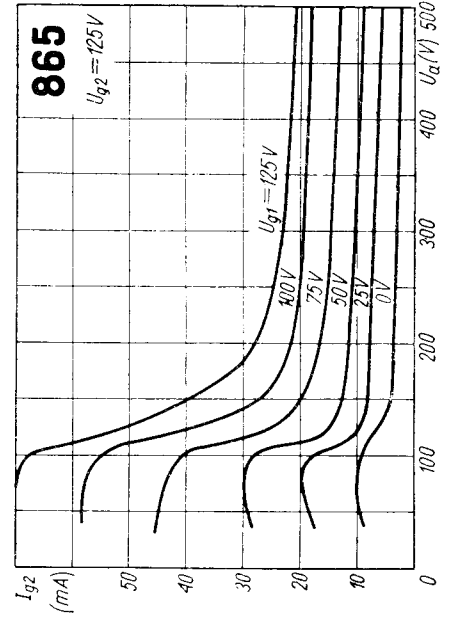
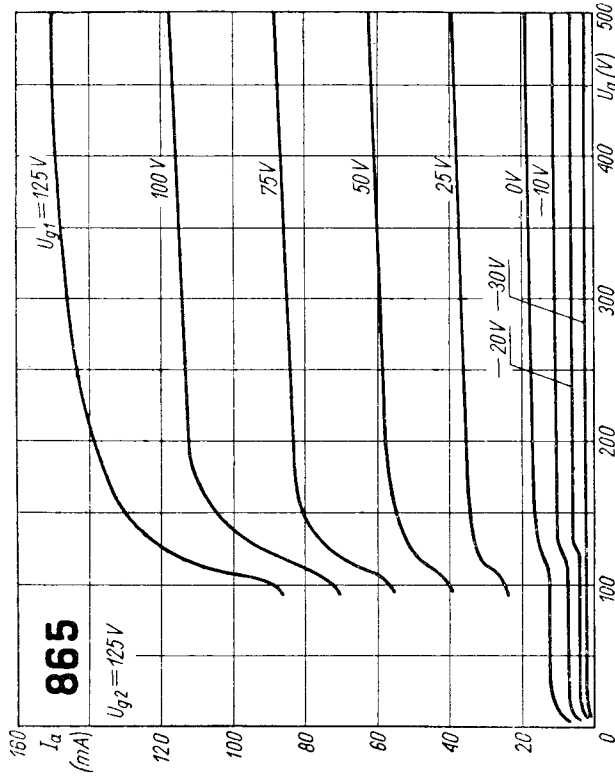


T.			U_f V	I_f A	Cl.	U_a V	U_{g2} V	U_{g1} V	I_a mA	I_{g2} mA	P_{dr} W	P_o W	P_{g2} W	P_a W
						$\left\{ \begin{array}{l} 375 \\ 500 \\ 525 \\ 750 \\ 750 \end{array} \right.$	$\left\{ \begin{array}{l} 125 \\ 125 \\ 125 \\ 125 \\ 175 \end{array} \right.$	$\left\{ \begin{array}{l} 80 \\ 80 \\ 80 \\ 80 \\ -200 \end{array} \right.$	$\left\{ \begin{array}{l} 55 \\ 50 \\ 45 \\ 40 \\ 60 \end{array} \right.$	$\left\{ \begin{array}{l} 11 \\ 9 \\ 6 \\ 5,5 \\ 15 \end{array} \right.$	$\left\{ \begin{array}{l} 2,5 \\ 2 \\ 1,2 \\ 1 \\ \text{maximum} \end{array} \right.$	$\left\{ \begin{array}{l} 8,5 \\ 10 \\ 14 \\ 16 \\ \text{maximum} \end{array} \right.$	$\left\{ \begin{array}{l} \\ \\ \\ \\ 3 \end{array} \right.$	$\left\{ \begin{array}{l} \\ \\ \\ \\ 15 \end{array} \right.$
865	RCA	1	7,5	2	$\left\{ \begin{array}{l} \text{C-T1f} \\ \text{A-Mod} \end{array} \right.$	$\left\{ \begin{array}{l} 375 \\ 500 \\ 500 \end{array} \right.$	$\left\{ \begin{array}{l} 125 \\ 125 \\ 175 \end{array} \right.$	$\left\{ \begin{array}{l} -120 \\ -120 \\ -200 \end{array} \right.$	$\left\{ \begin{array}{l} 50 \\ 40 \\ 60 \end{array} \right.$	$\left\{ \begin{array}{l} 11 \\ 9 \\ 15 \end{array} \right.$	$\left\{ \begin{array}{l} 3 \\ 2,5 \\ \text{maximum} \end{array} \right.$	$\left\{ \begin{array}{l} 8,5 \\ 10 \\ \text{maximum} \end{array} \right.$	$\left\{ \begin{array}{l} 2 \\ 2 \end{array} \right.$	$\left\{ \begin{array}{l} 10 \\ 10 \end{array} \right.$
					$\left\{ \begin{array}{l} \text{B-T1f} \\ \text{stat.} \end{array} \right.$	$\left\{ \begin{array}{l} 500 \\ 750 \\ 750 \end{array} \right.$	$\left\{ \begin{array}{l} 125 \\ 125 \\ 175 \end{array} \right.$	$\left\{ \begin{array}{l} -30 \\ -30 \end{array} \right.$	$\left\{ \begin{array}{l} 30 \\ 22 \\ 30 \end{array} \right.$	$\left\{ \begin{array}{l} 5 \\ 3 \end{array} \right.$	$\left\{ \begin{array}{l} 2 \\ 1,5 \\ \text{maximum} \end{array} \right.$	$\left\{ \begin{array}{l} 3 \\ 4,5 \\ \text{maximum} \end{array} \right.$	$\left\{ \begin{array}{l} 3 \\ 3 \end{array} \right.$	$\left\{ \begin{array}{l} 15 \\ 15 \end{array} \right.$

$S = 0,75 \text{ mA/V}; f = 15 \text{ MHz}$



C_{g1}	C_a	$C_{g1/a}$
pF	pF	pF
8,5	8	0,1

