

NATIONAL UNION

21EPL

"VIDEOTRON"

Cylindrical Face Plate

Magnetic Focus	Rectangular All Glass
Magnetic Deflection	Filterglass Face Plate
Ion-Trap Gun	

The NU-21 P₁ is a RECTANGULAR FACE, cylindrical front, direct-view, magnetically focused, magnetically-deflected Television Picture Tube, providing a 19-1/8" x 13-7/8" picture.

The rectangular face of the NU-21 P₁ uses a special "Filter" glass plate which effectively reduces ambient-light reflection, thus increasing picture contrast. Further: Advantage is taken of the well known optical properties of a cylindrical front surface to eliminate reflection and preserve sharp definition of the picture.

The tube has an electron gun designed to be used with a single-magnet external ion-trap magnet.

DATA

General:

Heater, for unipotential Cathode	
Voltage (AC or DC)	6.3 Volts
Current	0.6 (± 10%) Amp.
Direct interelectrode capacitance	
Grid No. 1 to all other electrodes	6 uuf
Cathode to all other electrodes	5 uuf
Face plate (with about 66% light transmission)	Filter Glass
Phosphor	No. 4-Sulfide Type
Fluorescence	White
Phosphorescence	White
Persistence	Short
Focusing Method	Magnetic
Deflection Method	Magnetic
Deflection Angles (Approx.)	
Diagonal	70°
Horizontal	65°
Vertical	50°
Ion-Trap gun	Requires external, single-field magnet
Overall Length	23-1/4" ± 3/8"
Greatest Diagonal of Tube at Face	21-7/32" ± 3/16"
Greatest Width of Tube at Face	20-1/4" ± 3/16"
Greatest Height of Tube at Face	15-9/16" ± 3/16"
Screen Size	19-1/8" x 13-7/8"

Cap
Base
Mounting Position

Recessed Small Cavity (JETEC No. J1-21)
Small-Shell Duodecal 5-Pin (JETEC No. B5-57)
Any

MAXIMUM RATINGS, Design-Center Values:

Collector VOLTAGE	18,000 Max. Volts
GRID-No. 2 VOLTAGE	500 Max. Volts
GRID-No. 1 VOLTAGE	
Negative Bias Value	125 Max. Volts
Positive Bias Value	0 Max. Volts
Positive Peak Value	2 Max. Volts
PEAK HEATER-CATHODE VOLTAGE:	
Heater negative with respect to cathode;	
During equipment warm-up period not exceeding	
15 seconds	410 Max. Volts
After equipment warm-up period	180 Max. Volts
Heater positive with respect to cathode	180 Max. Volts

TYPICAL OPERATION:

Collector Voltage	12,000 Max. Volts
Grid-No. 2 Voltage	300 Volts
Grid-No. 1 Voltage for visual extinction of undeflected focused spot	-33 to -77 Volts
Grid-No. 2 Current	-15 to 15 uamp
Focusing-coil current (Approx.) ¹	95 ua ma
Ion-Trap-Magnet Current (DC, Approx.) ²	75 ma




MAXIMUM CIRCUIT VALUES:

Grid-No. 1-circuit resistance	1.5 megohms
-------------------------------	-------------

-
1. For JETEC standard focus coil #109 with the combined grid No. 1 bias voltage and video-signal voltage adjusted to produce a highlight brightness of 30 foot lamberts on a picture area of 17" x 12-3/4". Distance from reference line of bulb to center of focus coil air gap shall be 3".
 2. JETEC ion-trap magnet No. 111 located in optimum position and rotated to give maximum brightness.

X-Ray Warning - Because the rating of the tube permits operation at voltages as high as 19.8 KILOVOLTS (absolute value), shielding of the tube for X-ray radiation may be needed whenever the operating conditions involve voltages in excess of 16 kilovolts.

Socket Connections - Pin 1: Heater; Pin 2: Grid No. 1; Pin 10: Grid No 2;
Pin 11: Cathode; Pin 12: Heater; CAP: Collector.

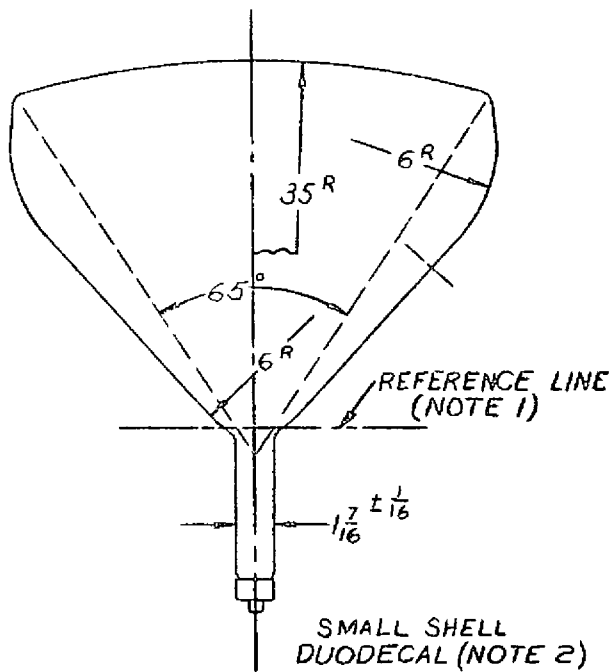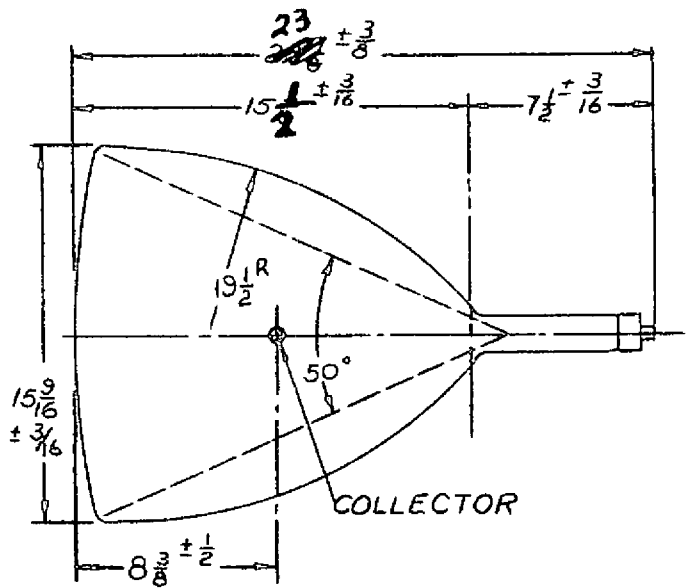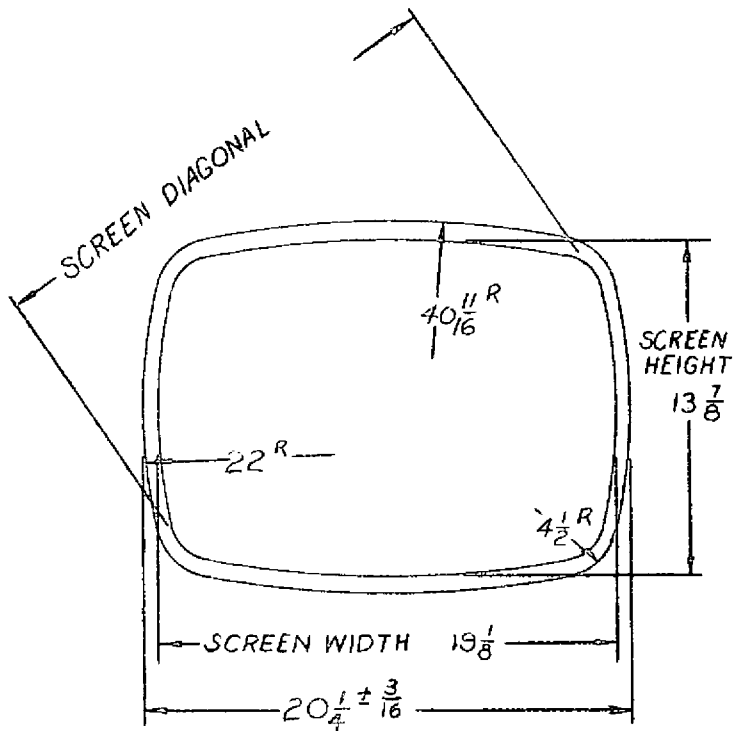

NOTE 1: With tube neck inserted through flared end of reference-line gauge (JETEC No. 110) and with tube seated in gauge, the reference line is determined by the inter-section of the plane CC' of the gauge with the glass funnel.

NOTE 2: Socket for this base should not be rigidly mounted; it should have flexible leads and be allowed to move freely. Bottom circumference of base shell will fall within a circle concentric with bulb axis and having a diameter of 3".